
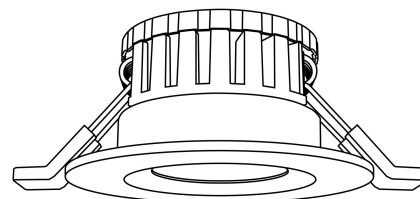


PARAFLECTA SWING Downlight 8-38-827/857-760LM IP65 front

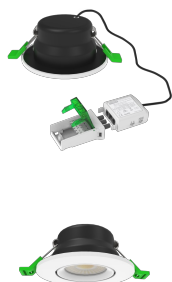

Technical Details:

Luminous Flux:	760 lm
LED Output:	7.5 W
Light Yield:	95 lm/W
Light Temperature:	2700, 3000, 4000, 5700 K
Light Color:	CCT Select
Color Rendering Index:	≥80 Ra
Color Consistency (SDCM):	<5
Beam Angle:	38 °
Light Emission:	downward
Dimmable:	✓
Method of Dimming:	"Triac Phasen-an-/abschnitt"
LED-Chip:	SMD2835
Ignition Time:	<0,5 s
Input Current:	AC 220 - 240V, 0,035mA, 50/60Hz
Power Consumption:	Power Select (5, 8 W)
Contains Driver:	✓
Driver Manufacturer:	Litegear
Power Factor (PF):	>0.85
Input Driver:	terminal
CC/CV:	CC
Output Current Adjustable:	✓
Input Lamp:	plug connector
Switching Cycles:	>50.000
Electrical Protection Class:	II
Loop-Through Cabling:	✓
Ambient Temperature (TA):	-20°C - 45°C
Storage Temperature:	-40°C - 60°C

Dimensions:	90x49 mm
Cut-Out Dimensions:	65-70 mm
Mounting:	Decke
Montageart:	recessed
Pivot Range tilt:	40 °
IP Class:	43 (65 room side)
IK Code:	10
Housing Color	white
Housing Material:	Aluminium/plastic
Coating:	lacquered
Special Feature of Housing:	schwenkbar
Cover:	Lens
Net Weight:	260 g
Type of Packaging:	box
Dimensions of Packaging:	102x101x101
Weight incl. Packaging:	0.337 kg
Content Master Package:	48
Dimensions of Master Package:	410x315x360 mm
Product Line:	Advance Line
Warranty	3 years
Operating Hours:	50.000 h L80/B20
Disposal Obligation:	✓
Customs Tariff Number:	9405119090
Certifications	CE,LM80,ERP
Barcode:	4250557824833
Universelles, modulares Downlight, schwenkbar	
inkl. 3 x wechselbare Frontblende: sw, ws, si	
kompatibel mit den meisten Phasen-an-/abschnittsdimm	
compatible with most Triac dimmer	
Spalsprofe and fire rated downlight	

Information and Downloads:

