


Isoled uredski ugradbeni panel




Kučište Body	Metal premazan elektrostatskim prahom Electrostatic powder coated metal	Ulazni napon Input Voltage (V)	220-240	Frekans Frequency (Hz)	50-60
LED	SMD	Indeks uzvrata boje Colour Ren. In. (CRI)	>80	IP Koruma IP Protection	IP40
Optika Diffuser	Opal s visokom propusnošću svjetlosti High transmission opal	Faktor snage Power Fac. (cos φ)	>0.95	RAL Kodu RAL Code	9016
Napajanje Driver	ENEC certificiran ENEC certified	Mogućnosti Options	DALI funkcija (hodnik) primjena 1-10V Dim zatamnivanje. Do 3 sata mogućnost rada u nuždi. Primjena željene boje temperature (CCT) DALI and corridor function applications. 1-10V Dimming application. Emergency lighting unit application up to 3 hours. Production according to desired correlated colour temperature (CCT).		

Krivulja raspodjele intenziteta svjetla **Light Distribution Curve**

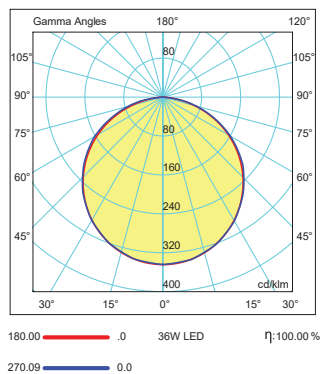

Tehnički crtež **Technical Drawing**

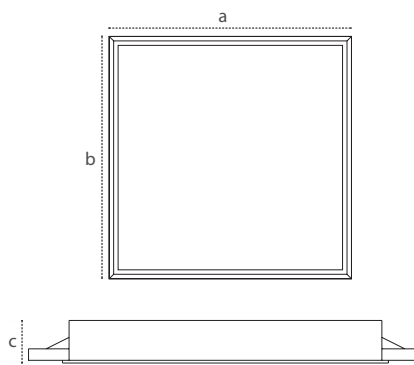

Područja primjene **Fields of Application**



Dimenzije i detalji

Product Details

Kat.br. Code No	Snaga Power (W)	Svjetlosni tok Luminous Flux (lm)	Temp. boje Colour Temp. (K)	Faktor aktivnosti Luminous Effic. (lm/W)	Dimenzije Dimensions (mm) a b c	(mm)	Količina Pcs/Pack	Volumen Package Vol. (m3)	Težina Package Weight (kg)
111474	36	3600	4000	100	595x595x40	588x588	5	0,198	15
111475	36	3600	6500	100	595x595x40	588x588	5	0,198	15

Legenda: ■ standard asortiman



EN 60598-2-2