



experience

KSA ELEKTROPROFI

 ALING-CONEL

ISKUSTVO U KOJE VJERUJETE


experience

YOU TRUST



Od 1984. kvaliteta i pouzdanost su glavni prioriteti u firmi Aling-Conel. To se podjednako odnosi na proizvode i usluge. Dugogodišnje iskustvo i brojna priznanja omogućila su nam da postanemo regionalni lider i pouzdan partner našim kupcima.

Since 1984, quality and reliability are the top priorities of the company Aling-Conel. This applies equally to products and services. Many years of experience and numerous awards have enabled us to become a regional leader and reliable partner to our customers.

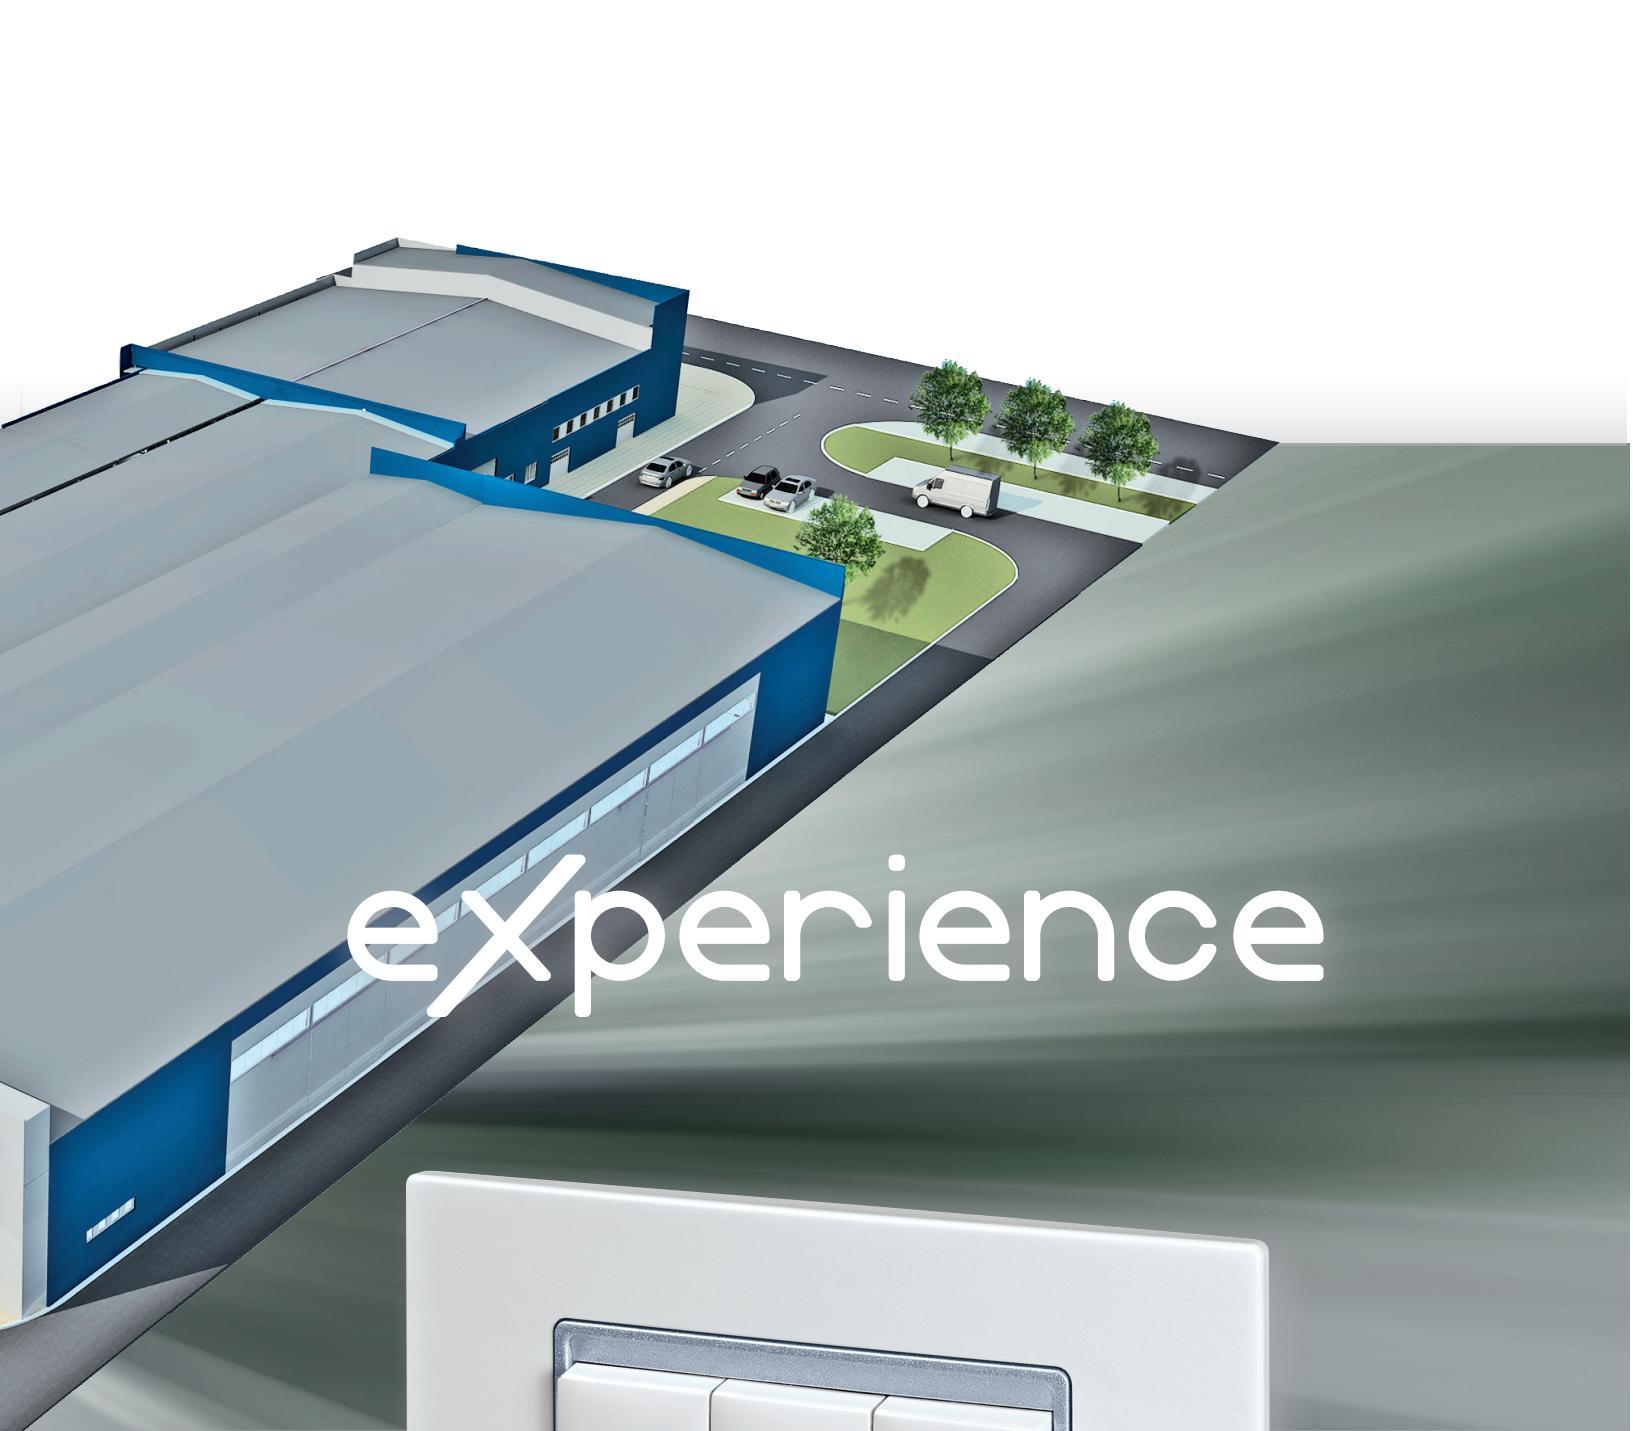

eXperience



 ALING-CONEL

DIZAJN OBLIKUJE NAŠ SVIJET

experience

DESIGN SHAPES OUR WORLD



Dizajnirani da zadovolje najviše sigurnosne standarde i proizvedeni od najkvalitetnijih materijala, Experience proizvodi nude mogućnost izražavanja osebujnog stila korisnika u svom domu.

Ultimativna elegancija ogleda se u geometriji oblika, a smjele kombinacije boja svakom zidu dat će dozu ekstravagancije.


Modularni elementi izraduju se u 4 boje

Designed to meet the highest safety standards and manufactured from the finest materials, Experience products offer the opportunity to express personal style of every customer.

The ultimate elegance is reflected in the geometry of shapes and daring color combinations will give to any wall a dose of extravagance.

Modular elements are done in 4 colors

VRLO IZRAŽAJAN - VRLO IMPRESIVAN - NJEŽAN NA DODIR
VERY EXPRESSIVE - VERY IMPRESSIVE - A GENTLE TOUCH

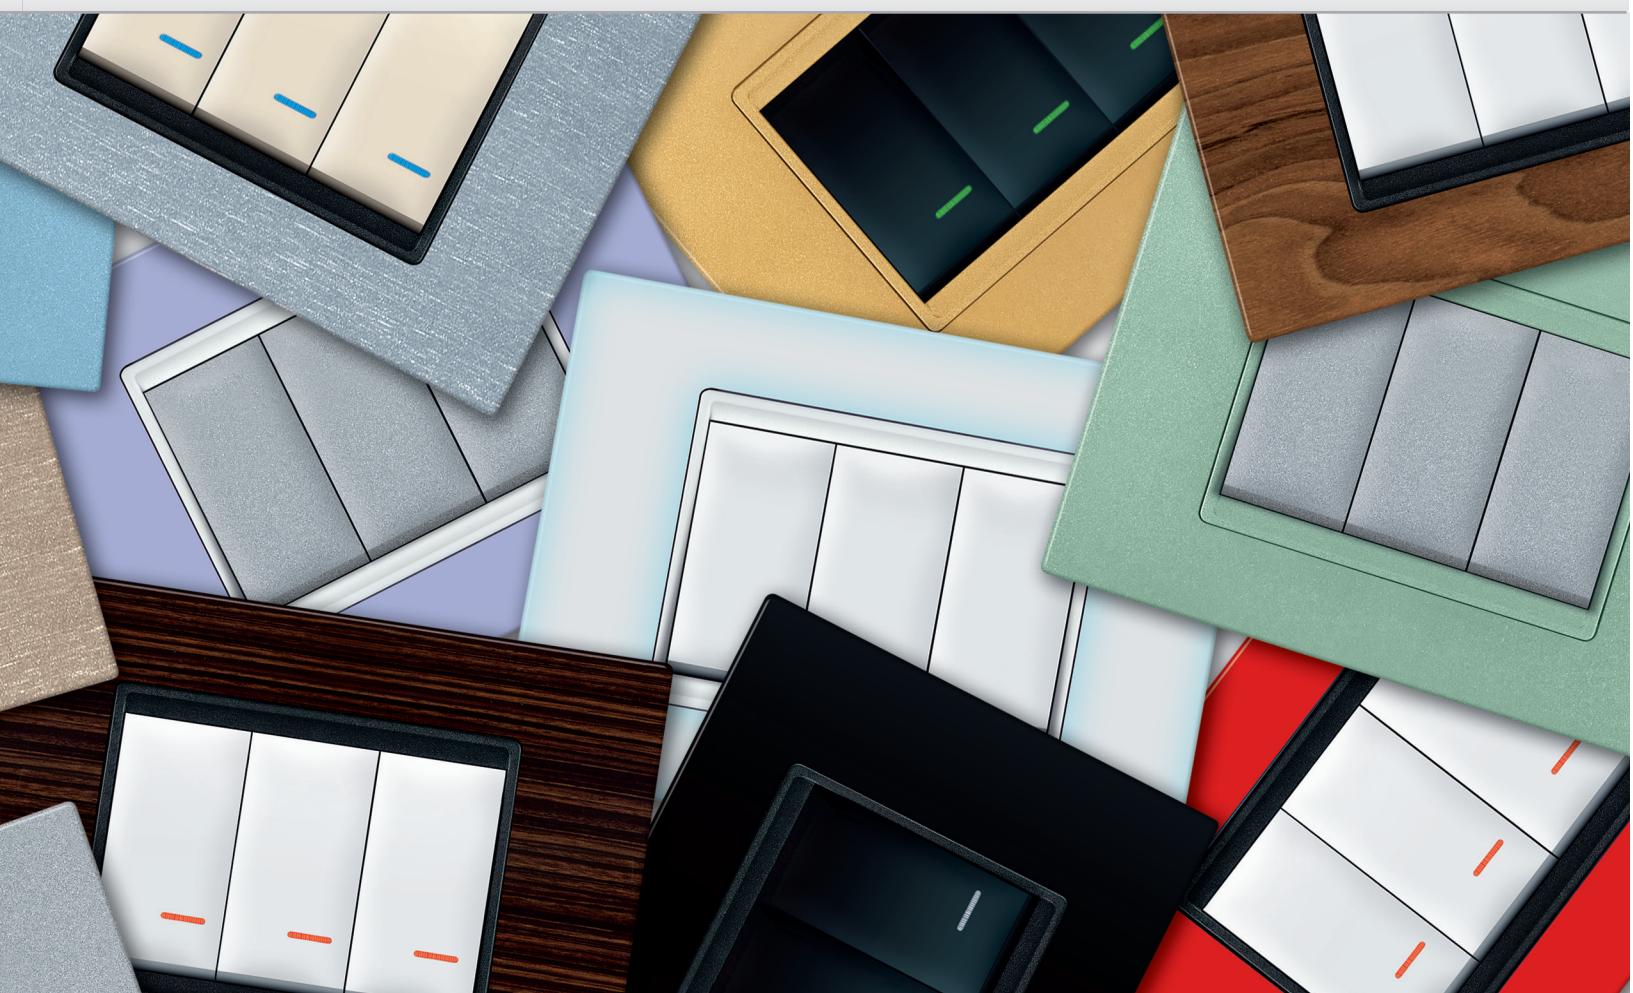

Bielo
White



Crna soft
Soft black



Srebrna
Silver



Krem
Beige

TEHNIČKE PREDNOSTI

experience


TECHNICAL ADVANTAGES

○ UNIVERZALNA INSTALACIJA

Ugradnja u montažne kutije Ø60 uz pomoć vijaka ili odvijača. Mogućnost nizanja kutija. Program Experience se na ovaj način može ugradivati kod adaptacije postojećih instalacija bez ugradnje novih montažnih kutija.

UNIVERSAL INSTALLATION

Installation into the mounting box Ø60 with screws or screw clamps. The possibility of installation of mounting frames in row. Program Experience in this way can be installed in adaptation of existing installations without installing of new prefabricated mounting boxes.

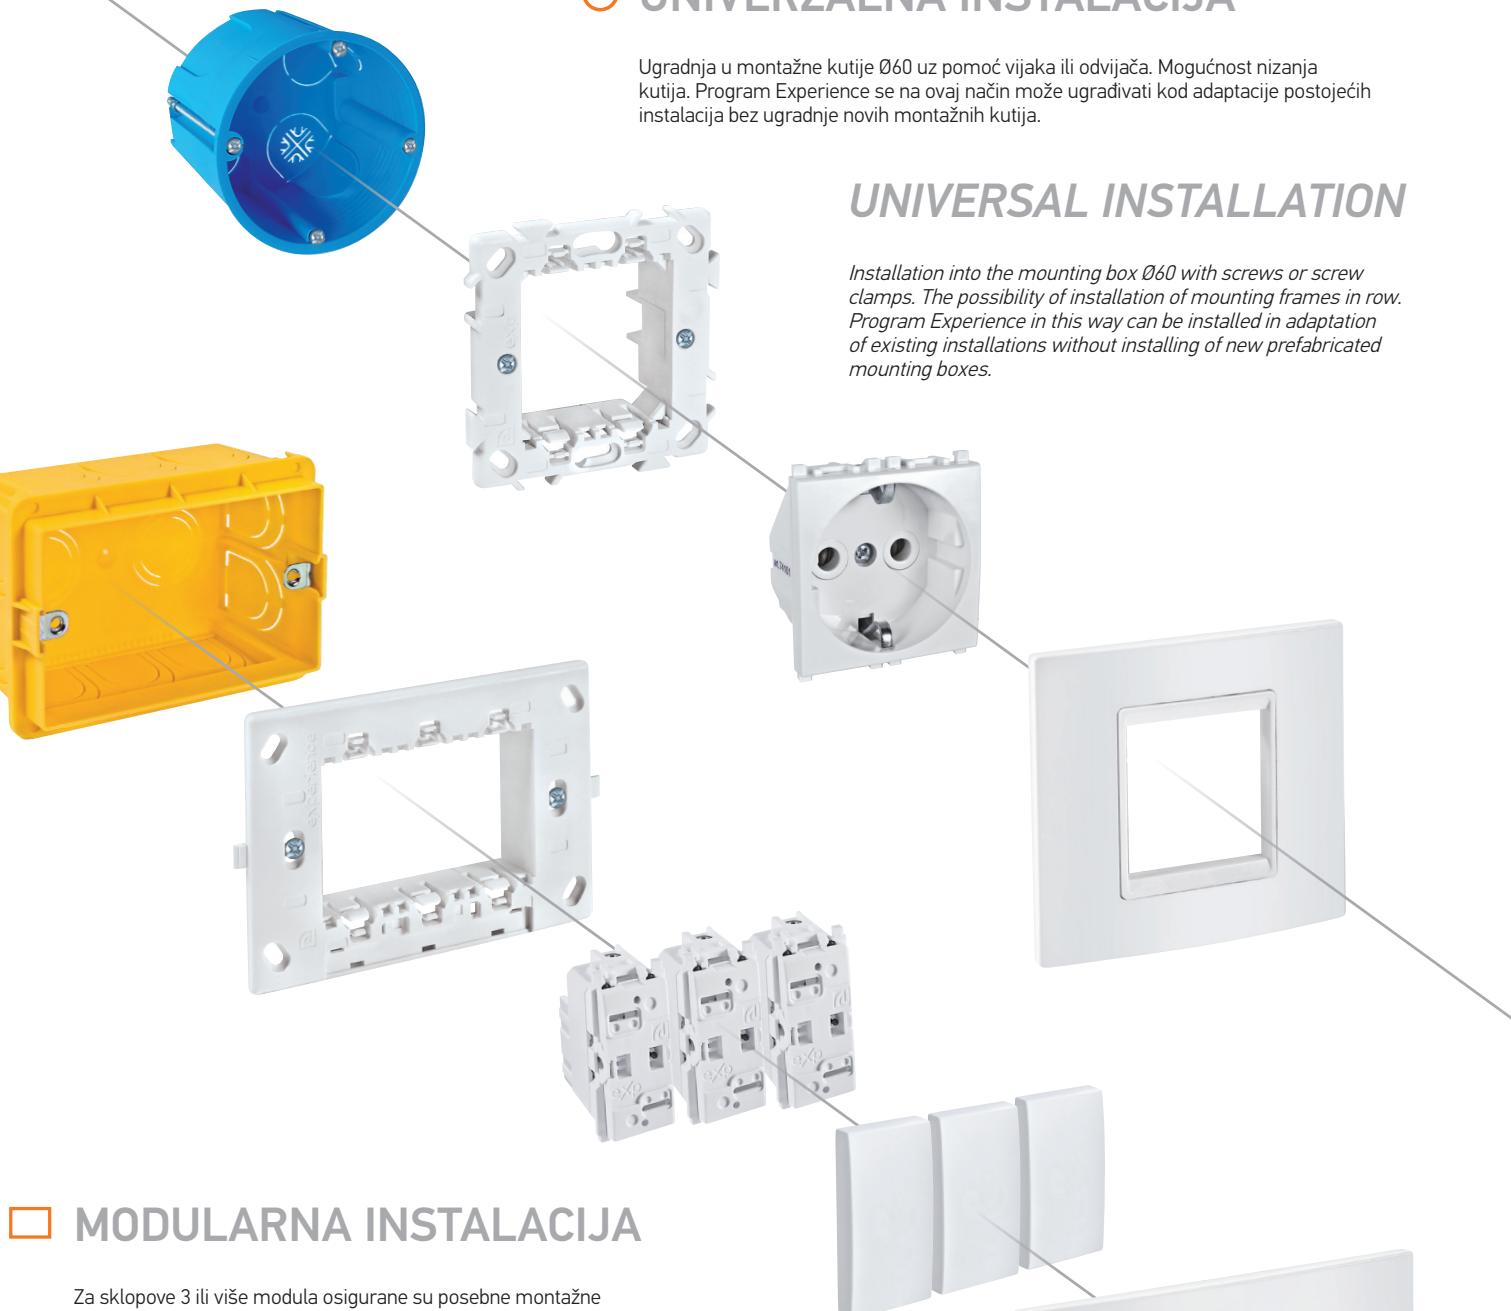


□ MODULARNA INSTALACIJA

Za sklopove 3 ili više modula osigurane su posebne montažne kutije na koje se prirubnica montira pomoću vijaka. Vijci se isporučuju zajedno sa prirubnicom. Montažne kutije mogu biti za pune i za šuplje zidove.

MODULAR INSTALLATION

For the assembly of 3 or more modules we are providing special mounting boxes where mounting frame is installing by screws. Screws are supplied together with the mounting frame. Mounting boxes are made for full and hollow walls.

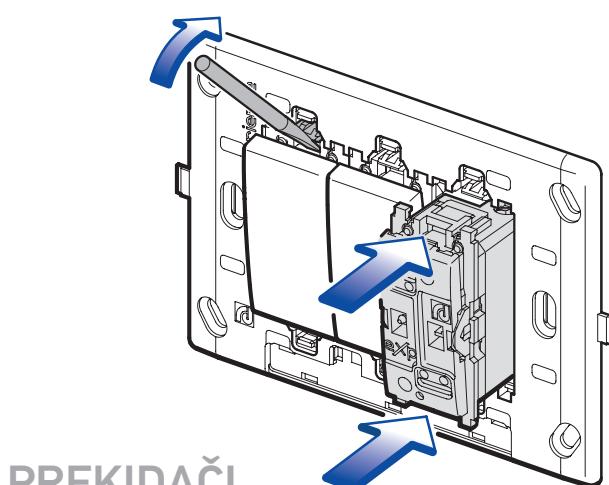

PREKIDAČI

Experience prekidači su jasno označeni i sigurni za povezivanje zahvaljujući šemli koja se nalazi sa strane prekidača (smanjen je rizik od pogrešne instalacije).

U prirubnicu se postavljaju ručnim utiskivanjem sa prednje strane, bez skidanja prirubnice sa montažne kutije. Demontaža prekidača se također vrši sa prednje strane bez skidanja prirubnice s montažne kutije. Dovoljno je odvijačem otkačiti modul prekidača.

Prekidači imaju jednostavne vijčane priključke koji omogućavaju sigurnu i brzu montažu. Opremljeni su uvodnim otvorima za lakše uvodenje vodiča. Prihvataju dva vodiča presijeka do 4mm^2 . Vijci su osigurani od ispadanja.

LED indikacije za prekidače (za indikaciju kada je prekidač uključena ili isključena) postoje u dvije varijante: sa kontaktima i sa provodnicima. Korisniku je data mogućnost izbora boje indikacije (crvena, plava, zelena, bijela).



SWITCHES

Experience switches are clearly marked and safe for connectivity thanks to the scheme, which is located on the side of the switch (reduced risk of incorrect installation).

Installing the module switch into the mounting frame is simply done by hand pressing from the front side, without removing the mounting frame from the mounting box. Disassembly is also done from the front side without removing the mounting frame from the mounting box. It is only needed to remove module by screwdriver.

Switches have simple screw connectors that allow safe and fast installation. Switches have inlets for easier implementation of conductors. Inlets can wire two conductors up to 4mm^2 . The screws are secured from falling out.

LED lamp for switches (for indication when the switch is ON or OFF) are offered in two types: with contacts and with conductors. Customer can choose the color of light (red, blue, green, white).



UTIČNICE


Experience utičnice odgovaraju strogim standardima i sigurnosnim provjerama. Utičnice su opremljene vijčanim priključcima s uvodima sa lakše uvodenje dva vodiča presijeka do $2,5\text{mm}^2$.

Utičnice se rade i u varijanti sa membranama koje osiguravaju zaštitu za djecu sprječavanjem umetanja predmeta u utičnicu.

Montaža i demontaža u prirubnicu se vrši na isti način kao i kod prekidača.

Prednosti utičnica Experience:

- veoma jednostavna montaža i demontaža
- pritezanje vodiča se vrši sa prednje strane i moguće je i kada je utičnica utisнутa u prirubnicu (olakšava laku montažu kratkih vodiča, krutih vodiča, velikog broja vodiča u kutiji)

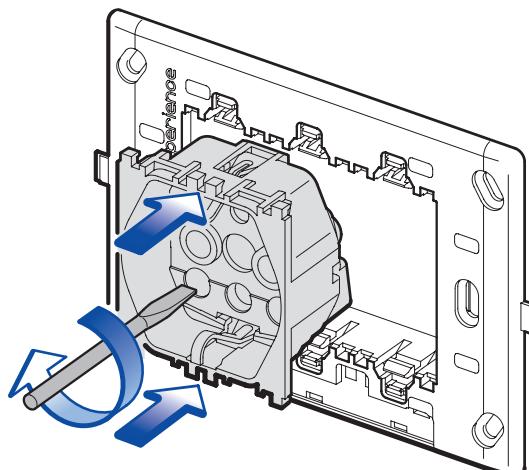

SOCKET OUTLETS

Experience socket outlets are complied with strict standards and safety checkouts. Socket outlets are supplied with screw connections with introductions to facilitate the introduction of two conductors up to 2.5mm^2 .

Sockets are made with membranes that provide protection for children by preventing insertion of objects into the socket outlet.

Installation and disassembly into the mounting frame is done the same way as for the switches.

Experience socket outlet advantages:

- user friendly assembly and dis-assembly
- tightening of the conductors is done from the front and is possible even when the socket outlet is inside the mounting frame (facilitates easy installation of short conductors, hard conductors, a large number of conductors in a mounting box)

TEHNIČKE PREDNOSTI

experience

TECHNICAL ADVANTAGES

REGULATORI

U prirodi najljepše svjetlo pojavljuje se u sutor. U kući, elektronski regulator vam pomaže da kreirate ugodan svjetlosni ambijent u kome ćete se opuštati.

Uz svaki elektronski regulator dolazi jasno tehničko uputstvo za povezivanje i korišćenje. (slika)

Elektronski regulator za LED rasvjetu može prigušivati LED žarulje do 200W. Izuzetne tehničke karakteristike omogućavaju savršeno prigušivanje bez treperenja.

Prednosti:

- Višefunkcionalni regulator svjetlosti
- Jednostavno programiranje prekidačom
- Ugradnja u postojeću instalaciju
- Mogućnost prigušivanja dimabilnih žarulja male snage (1-3W)



KOMUNIKACIJE

Telefon, TV, Internet – teško je zamisliti sadašnjicu bez komunikacija. Experience komunikacijske utičnice garantiraju optimalnu povezanost i visoku pouzdanost prijenosa podataka kroz konektore RJ12 i RJ45 koji zadovoljavaju standarde Cat3, Cat5e, Cat6 i Cat6A.

Provodnici se spajaju u konektore bez upotrebe alata (toolless) umetanjem vodiča koji se automatski vezuje sa kontaktima zatvaranjem konektora. Konektori RJ45 zadovoljavaju standarde SPAJANJA TIA/EIA 568A ili 568B.

DIMMERS

In nature the most beautiful light occurs in the twilight. In the house, the electronic controller helps to create a pleasant lighting atmosphere where you can relax.

With each electronic controller is packed a clear technical guidelines for connection and use.

Dimmer for LED can regulate LED lights up to 200W. Exceptional technical characteristics provide a perfect flicker-free dimming.

Benefits:

- Multifunctional Dimmer
- Simple programming button
- Installation in an existing installation
- Possibility of dimming of low power (1-3W) dimmable bulbs



COMMUNICATIONS

Telephone, TV, Internet – it is hard to imagine the present without communications. Experience communications modules guarantee optimal connection and high reliability of data transfer through the RJ12 and RJ45 connectors that meet the standards Cat3, Cat5e, Cat6 and Cat6A.

The conductors are connected to the connectors without tools (tool-less) by inserting conductor that is automatically associated with contact closure connector. RJ45 connectors meet the standards binding TIA / EIA 568A or 568B.



DEKORATIVNE MASKE

Maske modularnog programa Experience svojom nekonvencionalnom dimenzijom (92mm visine) i svojim jasnim geometrijskim linijama zadovoljavaju i klasične i moderne zahtjeve korisnika.


Novina Experience modularnog sistema je posebno dizajniran nosač maske, koji je sastavni dio dekorativne maske. Nosač maske proizvodi se u tri boje: bijela, crne i srebrne. Sa prednje strane vidi se kao meduram koji naglašava dizajn maske. Gledano sa strane, maska sa nosačem djeluje kao da „lebdi“ na zidu.

DECORATIVE COVER FRAMES

Cover frames of modular program Experience with its unconventional dimensions (92mm in height) and it's clear geometric lines meet both classic and modern customer demands.

Novity of Experience modular program is specially designed frame okvir; that is an integral part of decorative cover frame. Frame okvir is made in three colors: white, black and Srebrna. From the front it looks like inner frame that emphasizes frame design. Seen from the side, the decorative cover frame together with the frame okvir appears to "float" on the wall.

- Prekrivna maska se postavlja bez alata jednostavnim utiskivanjem na prirubnicu
- Skidanje maske je veoma jednostavno i izvodi se odvijačem na predviđenom mjestu čime se smanjuje mogućnost oštećenja

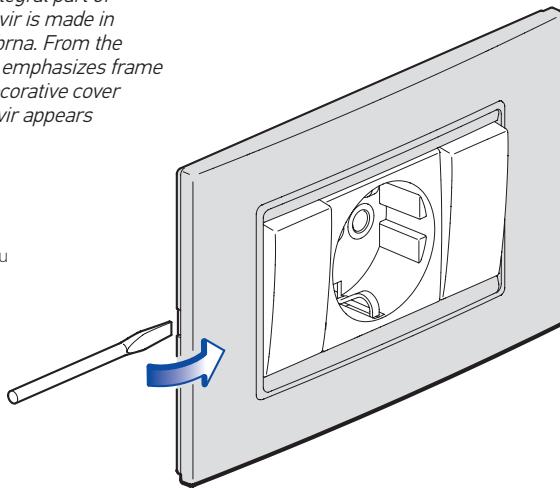


- The covering frame is positioned without any tools by simple pressing onto the flange
- The removal of frame is very simple by using the screw driver on the provided point thus reducing the possibility of any damage


PRIRUBNICE

Prirubnica je konstruirana tako da poseduje čvrstinu i otpornost na udare i vrlo je jednostavna za ugradnju. Fleksibilna montaža čak i kod neravnih zidova omogućuje da postavljeni sklop uvek stoji ravno.

Mesta za ugradnju na prirubnici i simetrična geometrija prirubnice 2M omogućava horizontalnu i vertikalnu ugradnju u nizu.

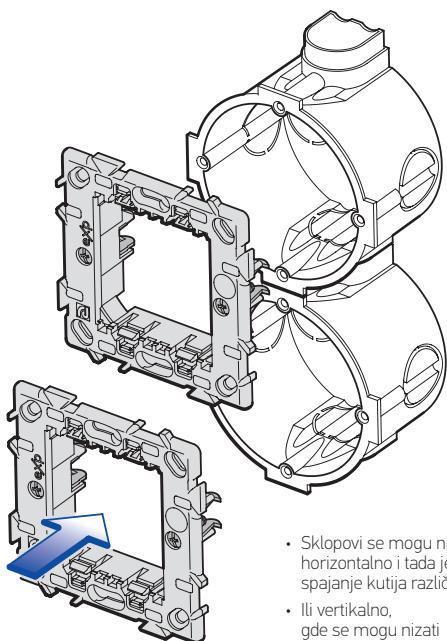

- Sklopovi se mogu nizati horizontalno i tada je moguće spajanje kutija različite veličine.
- Ili vertikalno, gde se mogu nizati samo kutije iste veličine.

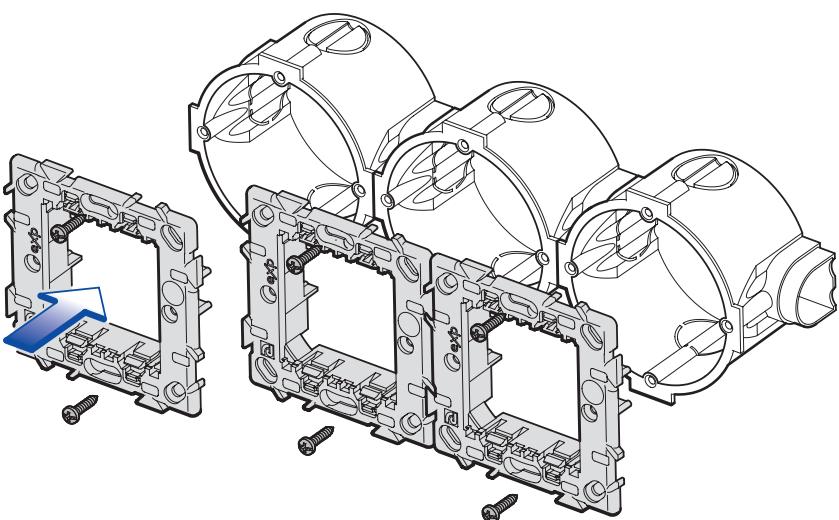

- The assemblies can be followed in a row horizontally and then it is possible to connect the installation boxes of various sizes.
- Or vertically, where only the boxes of the same size can follow in a row.

TRI OSNOVNA PROGRAMA

experience

THREE MAIN PROGRAMS



experience

BASIC

BASIC karakteriziraju ultimativna elegancija i smjele kombinacije kontrasta svijetlosti i tame dopunjene srebrnom bojom. U BASIC liniji tri su osnovne boje maski: bijela, crna i srebrna. Svaka maska dolazi u 3 kombinacije nosača maske.

BASIC reflects the ultimate elegance and bold contrast of light and dark colors complemented with Srebrna touch. Each mask comes in 3 different combinations with mask okvir.



KOMBINACIJA BOJA

KOMBINACIJA BOJA kao grupa proizvoda čini 16 maski podijeljenih u razigrano bojanje pod nazivom VIVID, metalik efekt pod nazivom METALLIC i nježne na dodir SOFT TOUCH.

COLOR consists of 16 cover frames divided into playful colors named VIVID, metallic effect called METALLIC and tender on touch called SOFT TOUCH.

Linija VIVID sastoji se od 4 pastelne boje sa bijelim nosačem maske (pastel plava, pastel zelena, pastel narandžasta i lavanda) i 3 neobična kontrasta sa crnim nosačem maske (krem, grafit i crvena)

VIVID line has 4 pastel colors with white mask okvir (pastel blue, pastel green, pastel orange and lavender) and 3 contrast colors with black mask okvir (beige, graphite and red)





Linija METALLIC sastoji se od 7 metalik boja sa istovjetnom nijansom nosača maske (metalik zlatna, zlatna sjaj, zlatna saten, antik srebrna, Aluminij, metalik zelena, metalik plava).

METALLIC line consists of 7 metallic colors with the same shade of mask okvir (metallic gold, shiny gold, satin gold, antique Srebrna, aluminum, metallic green, metallic blue)



Liniju SOFT TOUCH čine 2 osnovne boje: sky blue i soft touch crna. Novina je sky blue boja (bijela sa fosforom) koja u mraku svijetli plavičastim svijetлом.

SOFT TOUCH line has 2 colors: sky blue and soft touch black. The novelty is sky blue color (white phosphorus) that illuminates in the dark bluish light.

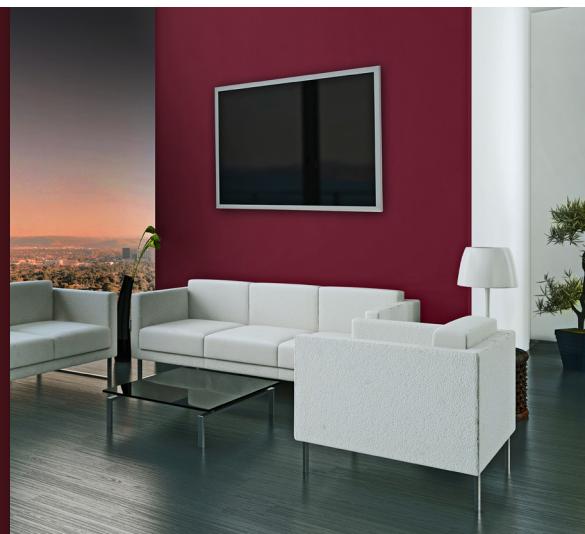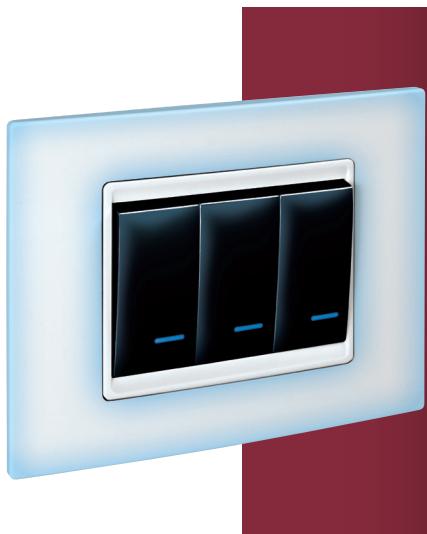

EXCLUSIVE

EXCLUSIVE grupa maski proizvedena je od prirodnih materijala i podjeljena je na maske izradene od prirodnog drveta WOOD, sofisticirane maske izradene od stakla GLASS i robusne maske izradene od metala METAL. Sve maske u EXCLUSIVE grupi izrađuju se sa crnim nosačem maske.

EXCLUSIVE group mask is made of natural materials and is divided into a mask made of natural Wood, sophisticated masks made of Glass and robust mask made of Metal. All the masks EXCLUSIVE group are made with black mask carrier.

Liniju WOOD čine četiri elegantne pune drvene maske: wenge, orah, trešnja i javor

WOOD line is made of natural wood and consists of four elegant cover frames: wenge, nut, cherry and maple



Linija GLASS sastoji se od 4 staklene maske u boji: kristalno bijela, kristal crna, ledeno srebrna i koral

GLASS line is made of colored glass and consists of four shiny colors: Crystal white, crystal black, ice Srebrna and coral.



Liniju METAL čine četiri maske od metala: titanij, aluminij, bakar patina i antracit kristal

METAL line is made of metal and has four colors: titanium aluminium, copper patina and anthracite crystal.





experience

PREKIDAČI SWITCHES

- Usuglašeno sa IEC 60669-1
- Ugradnja u noseću prirubnicu utiskivanjem
- Complied with IEC 60669-1
- Installation into the mounting frame by pressing



A72101

Prekidač jednopolni
16AX 250V~ EXP 1M
bez tipke

*1 way switch
16AX 250V~ EXP 1M
without button*



A72103

Prekidač izmjenični
16AX 250V~ EXP 1M
bez tipke

*2 way switch
16AX 250V~ EXP 1M
without button*



A72104

Prekidač križni
16AX 250V~ EXP 1M
bez tipke

*Intermediate switch
16AX 250V~ EXP 1M
without button*



A72105

Prekidač jednopolni 16AX 250V~
EXP 1M sa priključkom za nulte vodiče
(indikatorska) bez tipke

*1 way switch 16AX 250V~ EXP 1M
with connection for the neutral conductor
(with indicator) without button*

- Tinjalica svijetli kada je prekidač uključen
- Indication turns on when the switch is on



A72106

Prekidač dvopolni
10AX 250V~ EXP 1M
bez tipke

*2 pole switch
10AX 250V~ EXP 1M
without button*



A72111

Tipkalo bez tastera
250V~ EXP 1M bez tipke

*Push-button switch 16AX 250V~
EXP 1M without button*

16AX

- Tinjalica svijetli kada je prekidač isključen
- Indication turns on when the switch is off




A72117.x

Potezno tipkalo
prekidač jednopolni
16AX 250V~ EXP 1M

*Push-button
1 way with cord
16AX 250V~ EXP 1M*

Bijela White	x = 0
Crna soft Soft black	x = E1
Srebrna Srebrna	x = S
Krem Beige	x = 9

experience

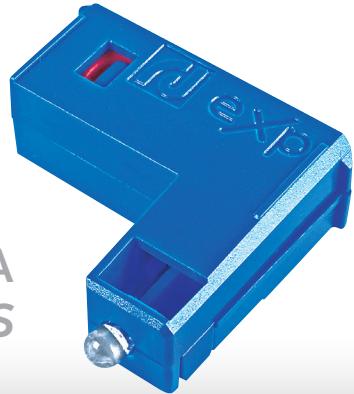

- Za indikaciju kada je prekidač uključen
- Za indikaciju kada je prekidač isključen
- For indication when the switch is on
- For indication when the switch is off

LED INDIKATORSKA SVJETLA LED INDICATION LAMPS



A72181.4

LED tinjalica 230V~ sa kontaktima (za indikaciju) EXP, crvena
LED lamp 230V~ with contacts (for indication) EXP, red

- Koristi se za indikaciju kada je prekidač isključen
(Jednopolni prekidač, tipkalo prekidač i izmjenični prekidač sa indikacijom)



A72181.5


LED tinjalica 230V~ sa kontaktima (za indikaciju) EXP, plava
LED lamp 230V~ with contacts (for indication) EXP, blue

- Used for indication when the switch is off
(1 way switch, push - button switch and 2 way switch)



A72183.4

LED tinjalica 24V~ sa kontaktima (za indikaciju) EXP, crvena
LED lamp 24V~ with contacts (for indication) EXP, red

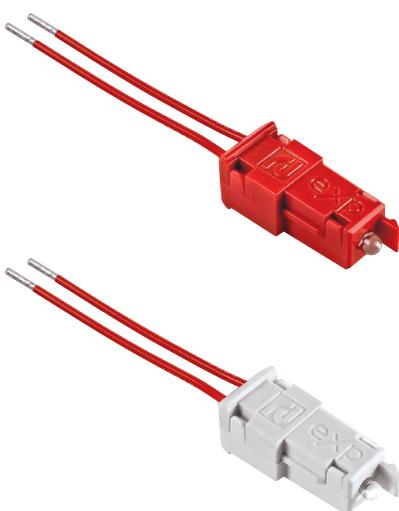


A72182.4

LED tinjalica 230V~ sa provodnicima (za indikaciju) EXP, crvena
LED lamp 230V~ with conductors (for indication) EXP, red

A72182.0

LED tinjalica 230V~ sa provodnicima (za indikaciju) EXP, bijela
LED lamp 230V~ with conductors (for indication) EXP, white

- Koristi se za indikaciju kada je prekidač uključena
(Jednopolni sa priključkom za nulti vodič, dvopolna)
- Koristi se za indikaciju kada je prekidač isključena (križni)

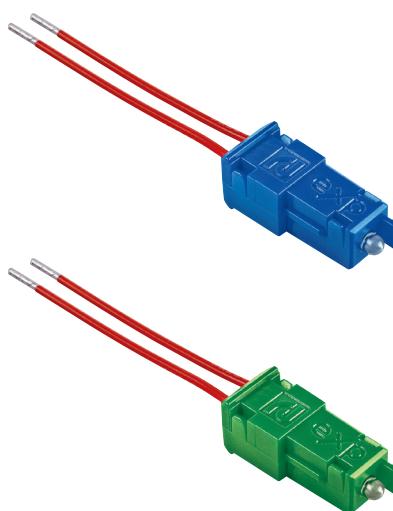


A72182.5

LED tinjalica 230V~ sa provodnicima (za indikaciju) EXP, plava
LED lamp 230V~ with conductors (for indication) EXP, blue


A72182.12

LED tinjalica 230V~ sa provodnicima (za indikaciju) EXP, zelena
LED lamp 230V~ with conductors (for indication) EXP, green

- Used for indication when the switch is on
(1 way switch with connection for the neutral conductor, 2 pole switch)
- Used for indication when the switch is off (intermediate switch)

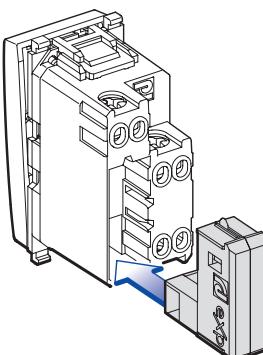


- Tipkalo prekidač, jednopolni i izmjenični prekidač
sa indikacijom koriste indikaciju sa kontaktima koja se jednostavno utisne u ležište (vidi sliku)

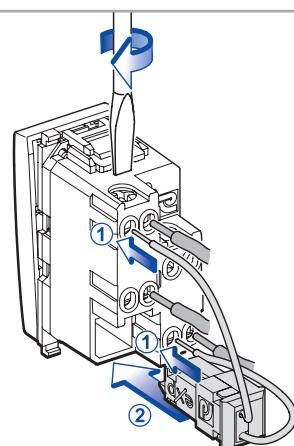

- Za jednopolnu prekidač sa priključkom za nulti vodič koristi se LED tinjalica sa provodnicima. Provodnici se postave zajedno sa instalacionim provodnicima (1) i potom se tinjalica utisne u ležište (2)

- Push - button switch,
1 way switch and 2 way switch
with indication are using LED lamp with contacts that is simply pressed into bearing (see image)

- 1 way switch with connection for the neutral conductor is using LED lamp with conductors. Conductors are placed together with installation conductors (1) and then indication is pressed into the bearing (2)

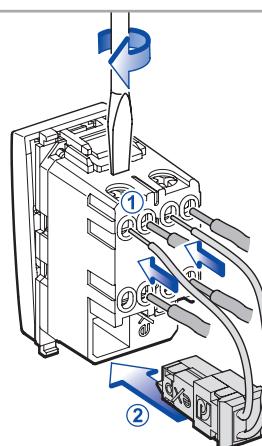


- Za dvopolnu i ukrsnu prekidač koristi se LED tinjalica sa provodnicima. Provodnici se postave zajedno sa instalacionim provodnicima (1) i potom se tinjalica utisne u ležište (2)

- 2 pole switch and intermediate switch are using LED lamp with conductors. Conductors are placed together with installation conductors (1) and then indication is pressed into the bearing (2)

experience


PREKIDAČI SWITCH BUTTONS

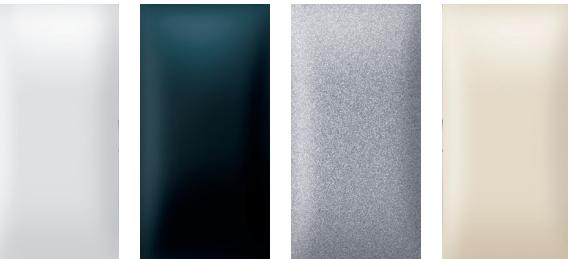

**A73101.x
1M**

Tipkalo EXP 1M
Button EXP 1M

- Tipkalo 1M širine 22,2mm
- Tipkalo 2M širine 44,4mm
- Za prekidače bez indikacije;
- Ugradnja na prekidač utiskivanjem
- *Button 1M width 22,2mm,*
- *Button 2M width 44,4mm*
- *For switches without indication;*
- *Installation onto the switch by pressing*

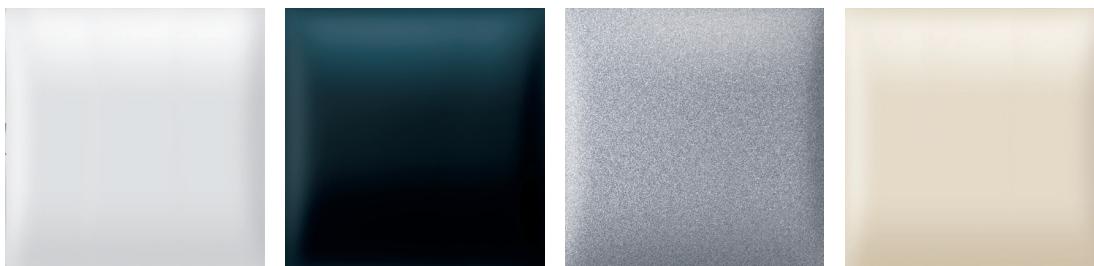

A73301.x 2M

Tipkalo EXP 2M
Button EXP 2M



A73201.x 1M

Tipkalo
sa indikacijom
EXP 1M
*Button
with indicator
EXP 1M*

- Tipkalo 1M širine 22,2mm
- Tipkalo 2M širine 44,4mm
- Za prekidače sa indikacijom
- Ugradnja na prekidač utiskivanjem
- *Button 1M width 22,2mm*
- *Button 2M width 44,4mm*
- *For switches with indication*
- *Installation onto the switch by pressing*



A73401.x 2M

Tipkalo
sa indikacijom
EXP 2M
*Button
with indicator
EXP 2M*



A70001.x

Poklopac maske
(slijevi modul)
EXP 1M
*Blank module
EXP 1M*

- Za pokrivanje mesta gdje nedostaje modul
- Pokriva širinu jednog modula 22,2mm
- Ugradnja u noseću prirubnicu utiskivanjem
- *For covering the places where module is missing*
- *Covers the width of one module 22,2mm*
- *Installation into the holding frame by pressing*

TIPKALO SA UGRAVIRANIM SIMBOLIMA SWITCH BUTTONS ENGRAVED WITH THE SYMBOLS



EXP 1M	A73104.x	A73105.x	A73106.x	A73107.x	A73102.x	A73102.x	
EXP 2M	A73304.x	A73305.x	A73306.x	A73307.x	A73302.x	A73303.x	
sa oznakom with symbol	pojačavanja <i>amplification</i>	ključa <i>key</i>	0-I <i>0-I</i>	posluge <i>servants</i>	strelica gore <i>arrow up</i>	strelica dole <i>arrow down</i>	
<ul style="list-style-type: none"> Tipkalo 1M širine 22,2mm, Tipkalo 2M širine 44,4mm Za prekidače bez indikacije; Ugradnja na prekidač utiskivanjem 	 	 	 	 	 	 	x = 0 Bijela <i>White</i> x = E1 Crna soft <i>Soft black</i> x = S Srebrna <i>Srebrna</i> x = 9 Krem <i>Beige</i>
<ul style="list-style-type: none"> Button 1M width 22,2mm, Button 2M width 44,4mm For switches without indication; Installation onto the switch by pressing 							


EXP 1M	A73202.x	A73203.x	A73204.x	A73205.x	A73206.x	A73207.x	A73208.x	A73209.x
EXP 2M	A73402.x	A73403.x	A73404.x	A73405.x	A73406.x	A73407.x	A73408.x	A73409.x
sa indikacijom i oznakom with indicator and symbol	svjetla <i>light</i>	zvona <i>bell</i>	bojlera <i>boiler</i>	grijalice <i>heater</i>	ventilatora <i>fan</i>	utičnice <i>socket</i>	perilice <i>washing machine</i>	tuša <i>shower</i>
<ul style="list-style-type: none"> Tipkalo 1M širine 22,2mm Tipkalo 2M širine 44,4mm Za prekidače sa indikacijom Ugradnja na prekidač utiskivanjem 	 	 	 	 	 	 	 	
<ul style="list-style-type: none"> Button 1M width 22,2mm Button 2M width 44,4mm For switches with indication Installation onto the switch by pressing 								

- Tipkalo se zakvači na jednu stranu tipkala, a druga strana se lagano pritisne da klikne tipkalo.


Napomena:

- kod tipkala sa indikacijom voditi računa o položaju indikacije (vidi sliku 1 i 2)
- stavljanje tipkala je jednostavnije ukoliko se prvo zakvači na podignutoj strani tipkala (kao na slici 1 i 2)
- Tipkalo 2M podešava nosač koji je sastavni dio tipkala 2M; zajedno sa postavljanjem tipkala 2M potrebno je utisnuti i nosač u prirubnicu (slika 2)

- The button is hooked to one side of switch, and the other side is lightly pressed until button is clicked.
- Note:**
- At buttons with indication pay attention of the position of indication (see picture 1 and 2)
- placing the button is easier if first snap to the raised side of the buttons (see picture 1 and 2)
- Button 2M has a carrier which is an integral part of button 2M; along with setting of button 2M it is necessary to press-in okvir into the mounting frame (picture 2)



Slika 1
Picture 1



Slika 2
Picture 2



experience

PREKIDAČI ZA ROLETE SWITCHES FOR SHUTTERS



A72114.x

Tipkalo prekidač za rolete
16AX 250V~
EXP 2M

*Push-button
shutters switch
16A 250v~
EXP 2M*

- Par tipkala sklopki povezanih za upravljanje kretanjem elektromotora za rolete u dva smjera

- A pair of connected push-button switches for the control of shutters' electric motor movement in two directions



A72108.x

Prekidač za rolete
10AX 250V~
EXP 1M

*Shutters switch
10A 250v~
EXP 1M*

- za upravljanje kretanjem elektromotora za rolete u dva smjera
- tri stabilna položaja I-0-I

- for control of shutters' electric motor movement in two directions
- three stable positions I-0-I



A72118.x

Tipkalo prekidač za rolete
10AX 250V~
EXP 1M

*Push-button
shutters switch
10A 250v~
EXP 1M*

- za upravljanje kretanjem elektromotora za rolete u dva smjera

- for control of shutters' electric motor movement in two directions

	Bijela White	x = 0
	Crna soft Soft black	x = E1
	Srebrna Srebrna	x = S
	Krem Beige	x = 9

- Relejni izlaz max 500W za sve tipove žarulja;
- Regulacija vremena isključenosti 10 s - 10 min;
- Regulacija osvjetljenosti pri kojoj senzor reagira 2 - 2000 lx;
- Regulacija svjetlosti;
- Mogućnost aktiviranja spoljnim tipkalom;
- Vidni ugao po horizontali 110°;
- Usuglašeno sa IEC 60669-2-1;
- Ugradnja u noseću prirubnicu utiskivanjem;
- Tinjalica

- Relay exit max 500W for all lamps;
- Time regulation 10 s - 10 min;
- Light threshold regulation 2 - 2000 lx;
- Sensitivity lever regulation;
- External push button activation;
- Horizontal view angle 110°;
- Complied with IEC 60669-2-1;
- Installation into the mounting frame by pressing;
- Indication

experience

ELEKTRONIKA ELECTRONICS



72203.x

Infracrveni detektor pokreta EXP 2M
500W, 230V~/50Hz

Infrared motion detector EXP 2M
500W, 230V~/50Hz



A72201.x

Elektronski regulator
40-300VA
EXP 1M
Dimmer rotative 40-300VA EXP 1M

- Za žarulje sa užarenim vlaknom i halogene žarulje sa standardnim transformatorom 230V~ 40-300W;
- Za halogene žarulje sa standardnim transformatorom 40-300VA;
- Usuglašeno sa IEC 60669-2-1;
- Ugradnja u noseću prirubnicu utiskivanjem;
- Tinjalica

- For the incandescent lamps and halogen lamps with standard transformer 230V~ 40-300W;
- For halogen lamps with standard transformer 40-300VA;
- Complied with IEC 60669-2-1;
- Installation into the mounting frame by pressing;
- Indication



A72202.x

Elektronski regulator sa naizmjeničnom sklopkom
EXP 1M, 40-300VA
Dimmer with alternative switch EXP 1M, 40-300VA

- Za žarulje sa užarenim vlaknom i halogene žarulje sa standardnim transformatorom 230V~ 40-300W;
- Za halogene žarulje sa standardnim transformatorom 40-300VA;
- Usuglašeno sa IEC 60669-2-1;
- Ugradnja u noseću prirubnicu utiskivanjem;
- Tinjalica

- For the incandescent lamps and halogen lamps with standard transformer 230V~ 40-300W;
- For halogen lamps with standard transformer 40-300VA;
- Complied with IEC 60669-2-1;
- Installation into the mounting frame by pressing;
- Indication



A72204.x

Elektronski regulator za induktivno opterećenje,
EXP 1M, 40-300VA
Dimmer for inductive load, EXP 1M, 40-300VA

- Za žarulje sa užarenim vlaknom i halogene žarulje 230V~ 40-500W;
- Za halogene žarulje sa standardnim transformatorom 40-300VA;
- Za halogene žarulje sa elektronskim transformatorom 40-200VA;
- Usuglašeno sa IEC 60669-2-1;
- Ugradnja u noseću prirubnicu utiskivanjem;
- Tinjalica

- For the incandescent lamps and halogen lamps 230V~ 40-500W;
- For halogen lamps with standard transformer 40-300VA;
- For halogen lamps with electronic transformer 40-200VA;
- Complied with IEC 60669-2-1;
- Installation into the mounting frame by pressing;
- Indication when dimmer is ON



A72205.x


Elektronski regulator za LED,
EXP 1M, 200W
Dimmer for LED, EXP 1M, 200W

- Univerzalno tipkalo elektronski regulator za sve vrste žarulja;
- Osnovna namena za CFL i LED dimabilne žarulje do 200W;
- Usuglašeno sa IEC 60669-2-1;
- Ugradnja u noseću prirubnicu utiskivanjem;
- Tinjalica

- Universal push-button dimmer for all types of bulbs;
- The main purpose for dimmable CFL and LED bulbs up to 200W;
- Complied with IEC 60669-2-1;
- Installation into the mounting frame by pressing;
- Indication



PREKIDAČI ZA KUPAONE BATHROOM SWITCHES

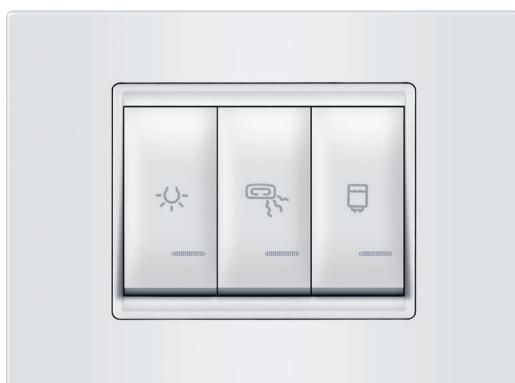

A72303.00

Univerzalni prekidač za kupaonu 3x16A 250V~ sa indikacijom i kutijom 3M, horizontalno (svjetlo, grijalica, bojler) EXP

Bathroom switch set 3x16AX 250V~ with indicator and mounting box 3M horizontal (light, heater, boiler) EXP

- Usuglašeno sa IEC 60669-1;
- Ugradnja u montažnu kutiju pomoću vijaka
- Complied with IEC 60669-1;
- Installation into the mounting box by screws



A72304.00

Univerzalni prekidač za kupaonu 4x16A 250V~ Usuglašeno sa IEC 60669-1; sa indikacijom i kutijom 4M, horizontalno (svjetlo, ventilator, grijalica, bojler) EXP

Bathroom switch set 4x16AX 250V~ with indicator and mounting box 4M horizontal (light, fan, heater, boiler) EXP

- Usuglašeno sa IEC 60669-1;
- Ugradnja u montažnu kutiju pomoću vijaka
- Complied with IEC 60669-1;
- Installation into the mounting box by screws



A72306.00

Univerzalni prekidač za kupaonu 3x16A 250V~ sa indikacijom i kutijom 2x2M, vertikalno (svjetlo 2M, grijalica, bojler) EXP

Bathroom switch set 3x16AX 250V~ with indicator and mounting box 2x2M vertical (light 2M, heater, boiler) EXP

- Usuglašeno sa IEC 60669-1;
- Ugradnja u dvije vertikalne nizajuće kutije Ø60 pomoću vijaka
- Complied with IEC 60669-1;
- Installation into two vertical mounted boxes Ø60 by screws



A72308.00

Univerzalni prekidač za kupaonu 4x16A 250V~ sa indikacijom i kutijom 2x2M, vertikalno (svjetlo, ventilator, grijalica, bojler) EXP

Bathroom switch set 4x16AX 250V~ with indicator and mounting box 2x2M vertical (light, fan, heater, boiler) EXP

- Usuglašeno sa IEC 60669-1;
- Ugradnja u dvije vertikalne nizajuće kutije Ø60 pomoću vijaka
- Complied with IEC 60669-1;
- Installation into two vertical mounted boxes Ø60 by screws



A72310.00

Univerzalni prekidač za kupaonu 3x16A 250V~ sa indikacijom - **UNIVERZALNI**, horizontalni (svijetlo, grijalica, bojler) EXP

- Usuglašeno sa IEC 60669-1;
- Ugradnja u montažnu kutiju pomoću vijaka

*Bathroom switch set 3x16AX 250V~ with indicator - **UNIVERSAL**, horizontal (light, heater, boiler) EXP*

- Complied with IEC 60669-1;
- Installation into the mounting box by screws


PREKIDAČI ZA KUPAONE **UNIVERSAL** BATHROOM SET

Univerzalno rješenje za montažu
na već ugrađene kutije (od 108 - 135mm)
ili na kutije veličine 4M.

Visina maske iznosi 91,8mm

*Universal solution for mounting
on existing mounting boxes (from 108 - 135mm)
or on mounting boxes 4M.*


Decorative frame height is 91,8mm

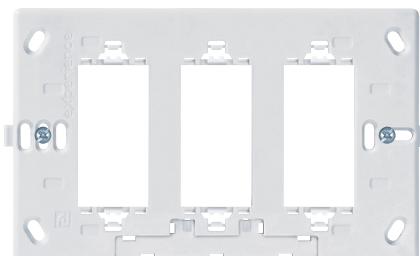

A71131

Prirubnica 3x1M EXP za univerzalni
kupaonski indikator, sa vijcima


*Mounting frame 3x1M EXP for universal
bathroom set, with screws*

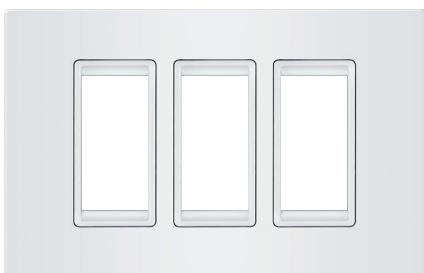

A70131.00

Maska 3x1M za univerzalni kupaonski indikator EXP,
bijela sa bijelim nosačem


*Cover frame 3x1M for universal bathroom set EXP,
white with white okvir*

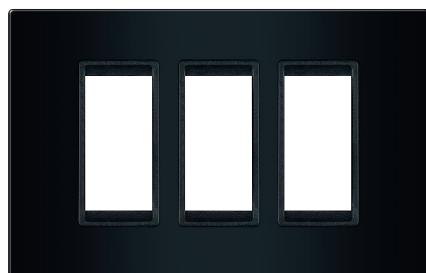

A70131.EE

Maska 3x1M za univerzalni kupaonski indikator EXP,
crna sa crnim nosačem

*Cover frame 3x1M for universal bathroom set EXP,
black with black okvir*

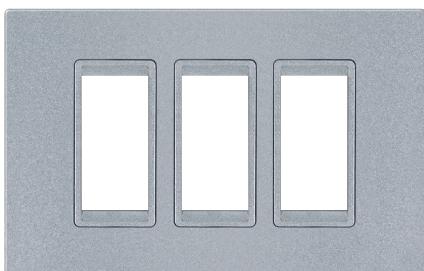

A70131.SS

Maska 3x1M za univerzalni kupaonski indikator EXP,
srebrna sa srebrnim nosačem

*Cover frame 3x1M for universal bathroom set EXP,
Srebrna with Srebrna okvir*



A70131.9

Maska 3x1M za univerzalni kupaonski indikator EXP,
krem sa crnim nosačem

*Cover frame 3x1M for universal bathroom set EXP,
beige with black okvir*





experience

UTIČNICE SOCKET OUTLETS

- Usuglašeno sa IEC 60884-1
- Ugradnja u noseću prirubnicu utiskivanjem
- Complied with IEC 60884-1
- Installation into the mounting frame by pressing



A74101.x

Šuko utičnica dvopolna
16A 250V~ EXP 2M

2 pole socket outlet
16A 250V~ EXP 2M



A74102.x

Šuko utičnica dvopolna
sa zaštitom kontakata
16A 250V~ EXP 2M

2 pole socket outlet
with safety shutter
16A 250V~ EXP 2M



A74103.xT

Šuko utičnica dvopolna sa
prozirnim poklopcom 16A
250V~ EXP 2M

2 pole socket outlet
with transparent cover
16A 250V~ EXP 2M




A74104.xT

Šuko utičnica dvopolna
sa prozirnim poklopcom i
zaštitom kontakata
16A 250V~ EXP 2M

2 pole socket outlet
with transparent cover
and safety shutter
16A 250V~ EXP 2M

experience

UTIČNICE SOCKET OUTLETS



A74101.4

crvena utičnica
red block

- Za mreže sa UPS (sa transformatorom)
- For power networks with UPS (with transformer)

A74101.12

zelena utičnica
green block

- Za mreže sa zaštićenim generatorskim napajanjem
- For power networks with protected generator supply via transformer

A74101.N

narandžasta
utičnica

- Za mreže sa generatorskim napajanjem preko transformatora
- For power networks with generator supply via transformer





A74112.x

Sklop dvije
utičnice dvopolne
16A 250V ~ EXP 2x2M
premošćene

*Sokets set
16A 250V~
EXP 2x2M
bridged*

- Premošćeni sklopovi utičnica
- Dovoljno je samo priključiti kabel napajanja
- *Socket outlet assembly with bridged contact*
- *One need only connected cable*



A74113.x

Sklop tri
utičnice dvopolne
16A 250V ~ EXP 3x2M
premošćene

*Sokets set
16A 250V~
EXP 3x2M
bridged*



A74121.x

Utičnica dvopolna
10A 250V~ EXP 1M,
CEI 23-50/P11
talijanska

*2 pole socket outlet
CEI 10A 250V~ EXP 1M*



A74121.4

Utičnica dvopolna
10A 250V~ EXP 1M,
CEI 23-50/P11
talijanska, crvena

*2 pole socket outlet
10A 250V~ EXP 1M,
CEI 23-50/P11
italian type, red*

- Usuglašeno sa CEI 23-50/P11;
- Ugradnja u noseću prirubnicu utiskivanjem

- Complied with CEI 23-50/P11;
- Installation into the mounting frame by pressing

- Za mreže sa UPS (sa transformatorom)
- For power networks with UPS (with transformer)



experience

KOMUNIKACIJE COMMUNICATIONS



A74211.x

Utičnica
telefonska
Keystone
RJ12 6/4 Cat 3
EXP 1M

*Telephone
socket Keystone
RJ12 6/4 Cat3
EXP 1M*

- Usuglašeno sa IEC 60603-7;
- Priklučak za dvije parice (linija + terminal);
- Ugradnja u noseću prirubnicu utiskivanjem

- Complied with IEC 60603-7;
- Connection for two pairs (line+terminal);
- Installation into the mounting frame by pressing




A74212.x

Utičnica
telefonska
Keystone
RJ12 6/6 Cat 3
EXP 1M

*Telephone
socket Keystone
RJ12 6/6 Cat3
EXP 1M*

- Usuglašeno sa IEC 60603-7;
- Za ISDN linije;
- Montaža vodiča bez upotrebe alata;
- Ugradnja u noseću prirubnicu utiskivanjem

- Complied with IEC 60603-7;
- For ISDN lines;
- Toolless conducting wire installation;
- Installation into the mounting frame by pressing

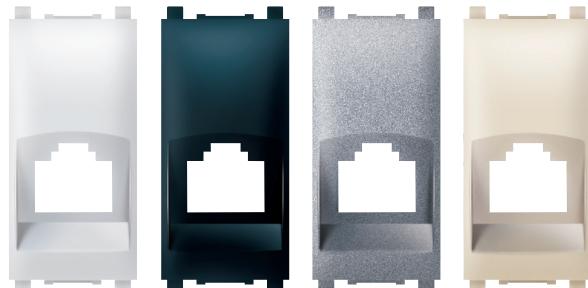

A74201.x

Keystone
nosač
EXP 1M

*Keystone
okvir
EXP 1M*

- Modul širine 22,2mm za nošenje Keystone konektora
- Ugradnja u noseću prirubnicu utiskivanjem

- Module 22.2mm width for Keystone connectors holding
- Installation into the mounting frame by pressing



A74303

Modul
Keystone
Link basic
RJ12
6/4 Cat 3

*Module
Keystone
Linkbasic
RJ12
6/4 Cat 3*



A74305

Modul
Keystone
Link basic
RJ45
Cat 5e UTP

*Module
Keystone
Linkbasic
RJ45
Cat 5e UTP*



A74306

Modul
Keystone
Link basic
RJ45
Cat 6 UTP

*Module
Keystone
Linkbasic
RJ45
Cat 6 UTP*



A74307

Modul
Keystone Link
basic
RJ45
Cat 6A UTP

*Module
Keystone
Linkbasic
RJ45
Cat 6A UTP*



A74313

Modul
Keystone
Linkbasic
RJ12
6/6 Cat 3

*Module
Keystone
Linkbasic
RJ12
6/6 Cat 3*



A74315

Modul
Keystone
Linkbasic
RJ45
Cat 5e FTP

*Module
Keystone
Linkbasic
RJ45
Cat 5e FTP*



A74316

Modul
Keystone
Linkbasic
RJ45
Cat 6 FTP

*Module
Keystone
Linkbasic
RJ45
Cat 6 FTP*



A74317

Modul
Keystone
Linkbasic
RJ45
Cat 6A FTP

*Module
Keystone
Linkbasic
RJ45
Cat 6A FTP*



A74221.x

Utičnica
komunikacijska
Keystone
RJ45 Cat 5e UTP
EXP 1M
*Data socket
Keystone
RJ45 Cat5e UTP
EXP 1M*

- Usuglašeno sa IEC 60603-7;
- Montaža vodiča
bez upotrebe alata;
- Spajanje prema TIA/EIA-
568A ili 568B standardu
za raspored parica;
- Ugradnja u noseću
prirubnicu utiskivanjem
- Complied with IEC 60603-7;
- Toolless conducting
wire installation;
- Connecting according to TIA/EIA-
568A or 568B standard for
the arrangement of pairs;
- Installation into the mounting
frame by pressing



A74222.x

Utičnica
komunikacijska
Keystone
RJ45 Cat 5e FTP
EXP 1M
*Data socket
Keystone
RJ45 Cat5e FTP
EXP 1M*

- Usuglašeno sa IEC 60603-7;
- Montaža vodiča
bez upotrebe alata;
- Spajanje prema TIA/EIA-
568A ili 568B standardu
za raspored parica;
- Ugradnja u noseću
prirubnicu utiskivanjem
- Complied with IEC 60603-7;
- Toolless conducting
wire installation;
- Connecting according to TIA/EIA-
568A or 568B standard for
the arrangement of pairs;
- Installation into the mounting
frame by pressing



A74223.x

Utičnica
komunikacijska
Keystone
RJ45 Cat 6 UTP
EXP 1M
*Data socket
Keystone
RJ45 Cat6 UTP
EXP 1M*

- Usuglašeno sa IEC 60603-7;
- Montaža vodiča
bez upotrebe alata;
- Spajanje prema TIA/EIA-
568A ili 568B standardu
za raspored parica;
- Ugradnja u noseću
prirubnicu utiskivanjem
- Complied with IEC 60603-7;
- Toolless conducting
wire installation;
- Connecting according to TIA/EIA-
568A or 568B standard for
the arrangement of pairs;
- Installation into the mounting
frame by pressing



A74224.x

Utičnica
komunikacijska
Keystone
RJ45 Cat 6 FTP
EXP 1M
*Data socket
Keystone
RJ45 Cat6 FTP
EXP 1M*

- Usuglašeno sa IEC 60603-7;
- Montaža vodiča
bez upotrebe alata;
- Spajanje prema TIA/EIA-
568A ili 568B standardu
za raspored parica;
- Ugradnja u noseću
prirubnicu utiskivanjem
- Complied with IEC 60603-7;
- Toolless conducting
wire installation;
- Connecting according to TIA/EIA-
568A or 568B standard for
the arrangement of pairs;
- Installation into the mounting
frame by pressing



A74225.x

Utičnica
komunikacijska
Keystone
RJ45 Cat 6A UTP
EXP 1M
*Data socket
Keystone
RJ45 Cat6A UTP
EXP 1M*

- Usuglašeno sa IEC 60603-7;
- Montaža vodiča
bez upotrebe alata;
- Spajanje prema TIA/EIA-
568A ili 568B standardu
za raspored parica;
- Ugradnja u noseću
prirubnicu utiskivanjem
- Complied with IEC 60603-7;
- Toolless conducting
wire installation;
- Connecting according to TIA/EIA-
568A or 568B standard for
the arrangement of pairs;
- Installation into the mounting
frame by pressing



A74226.x

Utičnica
komunikacijska
Keystone
RJ45 Cat 6A FTP
EXP 1M
*Data socket
Keystone
RJ45 Cat6A FTP
EXP 1M*

- Usuglašeno sa IEC 60603-7;
- Montaža vodiča
bez upotrebe alata;
- Spajanje prema TIA/EIA-
568A ili 568B standardu
za raspored parica;
- Ugradnja u noseću
prirubnicu utiskivanjem
- Complied with IEC 60603-7;
- Toolless conducting
wire installation;
- Connecting according to TIA/EIA-
568A or 568B standard for
the arrangement of pairs;
- Installation into the mounting
frame by pressing



experience

KOMUNIKACIJE COMMUNICATIONS



A74261.x

Utičnica antenska TV IEC M / F EXP 1M za individualne sisteme

TV aerial socket IEC M/F for individual systems EXP 1M

- Usuglašeno sa IEC 169-2 - muški konektor;
- Montaža antenskog kabla preko F konektora;
- Bez prigušenja signala;
- Ugradnja u noseću prirubnicu utiskivanjem
- Complied with IEC 169-2 - M connector;
- Installation of aerial cable by F connector;
- Without signal attenuation; I
- Installation into the mounting frame by pressing



A74262.x

Utičnica antenska FM IEC F / F EXP 1M

FM aerial socket IEC F/F EXP 1M

- Usuglašeno sa IEC 169-2 - ženski konektor;
- Montaža antenskog kabla preko F konektora;
- Bez prigušenja signala;
- Ugradnja u noseću prirubnicu utiskivanjem
- Complied with IEC 169-2 - F connector;
- Installation of aerial cable by F connector ;
- Without signal attenuation; I
- Installation into the mounting frame by pressing



A74263.x

Utičnica antenska TV IEC završna 5dB EXP 1M

TV aerial socket end-line 5db IEC EXP 1M

- Usuglašeno sa IEC 169-2 - muški konektor;
- Montaža antenskog kabla preko vijčane veze;
- Prigušenje signala cca 5dB;
- Ugradnja u noseću prirubnicu utiskivanjem
- Complied with IEC 169-2 - M connector;
- Installation of aerial cable by screw terminals;
- Signal attenuation approx. 5dB;
- Installation into the mounting frame by pressing



A74264.x

Utičnica antenska TV prolazna 10dB IEC EXP 1M

TV aerial socket throughpass 10db IEC EXP 1M

- Usuglašeno sa IEC 169-2 - muški konektor;
- Montaža antenskog kabla preko vijčane veze;
- Prigušenje signala cca 10dB;
- Ugradnja u noseću prirubnicu utiskivanjem
- Complied with IEC 169-2 - M connector;
- Installation of aerial cable by screw terminals;
- Signal attenuation approx. 10dB;
- Installation into the mounting frame by pressing



A74265.x

Utičnica antenska TV F/F EXP 1M za individualne sisteme SAT

TV aerial socket F/F for individual systems EXP 1M

- Završna za satelitske antene;
- Montaža antenskog kabla preko F konektora;
- Bez prigušenja signala;
- Ugradnja u noseću prirubnicu utiskivanjem
- Terminal for satellite aerials;
- Installation of aerial cable by F connector;
- Without signal attenuation;
- Installation into the mounting frame by pressing



A74283.x

Utičnica USB punjač
1,2A 5V= EXP 2M
*Power supply unit USB
1,2A 5V= EXP 2M*

- Za punjenje elektronskih uređaja putem standardnog USB porta;
- Punjenje dva uređaja istovremeno;
- Usuglašeno sa EN 60950-1 i EMC direktivom;
- Ugradnja u noseću prirubnicu utiskivanjem

- For charging of electronic devises via standard USB port;
- Enables charging of two devices simultaneously;
- Complied with EN 60950-1 and EMC directive;
- Installation into the mounting frame by pressing



A74284.x

Utičnica USB
EXP 1M
*USB socket
EXP 1M*

- Za konekciju USB uređaja i kablova;
- Podržava USB 2.0 standard;
- Ugradnja u noseću prirubnicu utiskivanjem

- For connection of USB devices and cables;
- Supports USB 2.0 standard;
- Installation into the mounting frame by pressing



A74285.x

Utičnica HDMI
EXP 1M
*HDMI socket
EXP 1M*

- Za konekciju kablova za prijenos signala preko HDMI priključka;
- Ugradnja u noseću prirubnicu utiskivanjem

- For the transmission of signal through HDMI connector;
- Installation into the mounting frame by pressing



A74281.x

Utičnica audio 2xRCA
EXP 1M
*Audio socket
2XRCA EXP 1M*

- Za prijenos audio signala - stereo;
- Montaža vodiča lemljenjem;
- Ugradnja u noseću prirubnicu utiskivanjem

- For the transmission of audio signals stereo;
- Installation of conducting wires by soldering;
- Installation into the mounting frame by pressing



A74282.x

Utičnica audio/video
BNC/BNC EXP 1M
*Audio/video
socket
BNC/BNC EXP 1M*

- Za prijenos audio ili video signala;
- Montaža kabla preko BNC konektora;
- Ugradnja u noseću prirubnicu utiskivanjem

- For the transmission of audio or video signals;
- Installation of cable by BNC connector;
- Installation into the mounting frame by pressing

experience

DEKORATIVNE MASKE DECORATIVE FRAMES BASIC

Raznovrsnost programa Experience, pored brojnih funkcionalnih modula, ogleda se i u izuzetno velikoj ponudi dekorativnih maski.

Podijeljene su u 3 osnovne grupe BASIC, COLOR i EXCLUSIVE, ovisno od boja i materijala koji su korišteni pri izradi.

Raznolikost boja i veliki broj kombinacija, program Experience čine savršenim dekorom na zidu kako klasičnih tako i modernih, elegantnih interijera.



BIJELA MASKA / BIJELI NOSAČ
WHITE FRAME / bijeli okvir



CRNA MASKA / CRNI NOSAČ
BLACK FRAME / crni okvir



SREBRNA MASKA / SREBRNI NOSAČ
SILVER FRAME / srebrni okvir



BIJELA MASKA / CRNI NOSAČ
WHITE FRAME / bijeli okvir



CRNA MASKA / BIJELI NOSAČ
BLACK FRAME / crni okvir



SREBRNA MASKA / BIJELI NOSAČ
SILVER FRAME / srebrni okvir



BIJELA MASKA / SREBRNI NOSAČ
WHITE FRAME / bijeli okvir



CRNA MASKA / SREBRNI NOSAČ
BLACK FRAME / crni okvir




SREBRNA MASKA / CRNI NOSAČ
SILVER FRAME / srebrni okvir

Diversity of Experience, among numerous functional modules, reflects in very large offer of decorative masks.

Divided into three main groups **BASIC**, **COLOR** and **EXCLUSIVE**, depending on the colors and materials.

The variety of colors and a large number of combinations, makes Experience the perfect decor on the wall for traditional as well for the modern and extravagant interiors.

BOJA

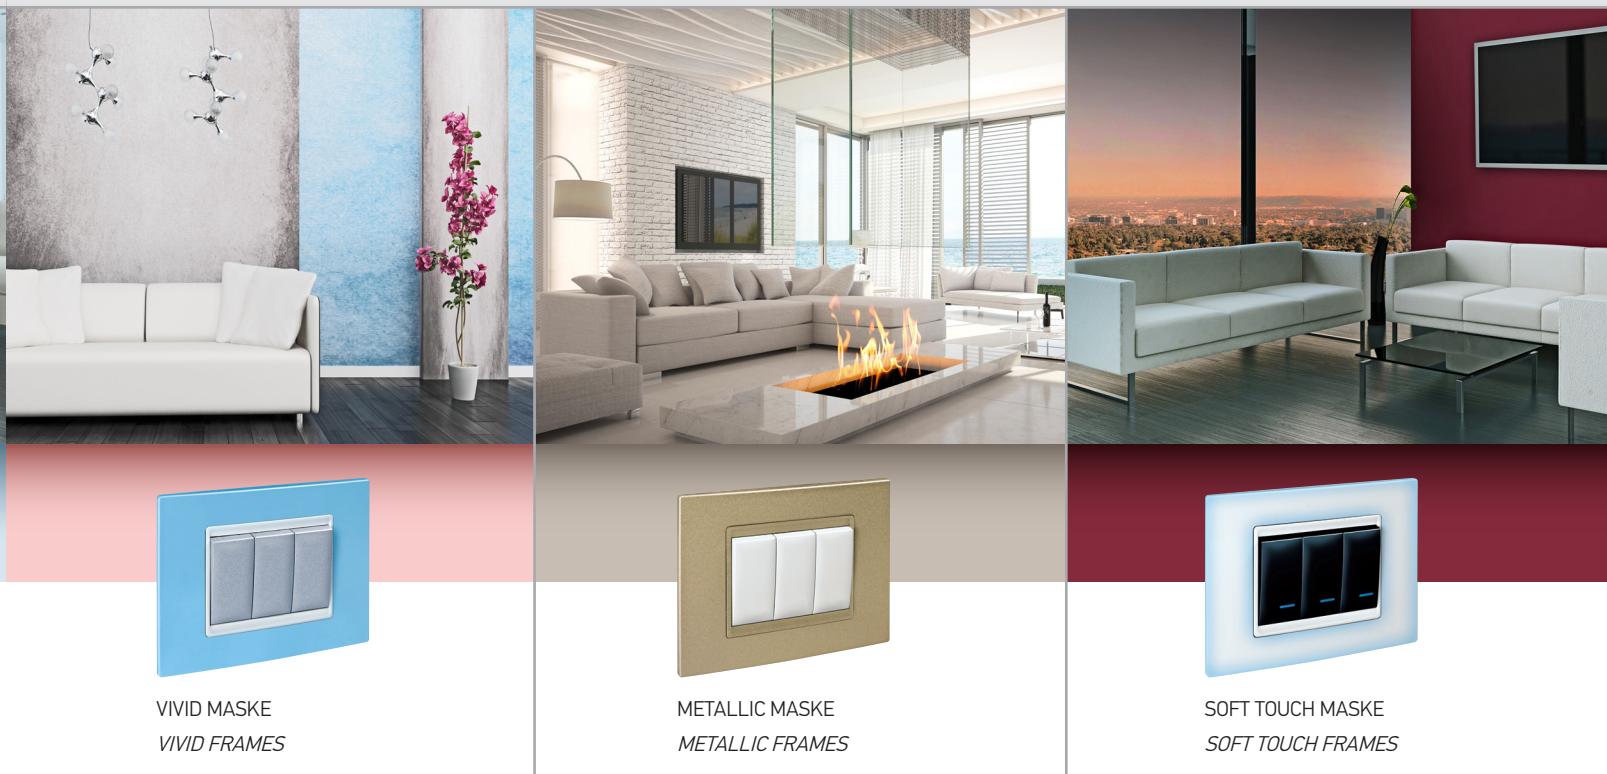

EXCLUSIVE










experience

BASIC BIJELA / WHITE

Ultimativna elegancija i prozračnost ogledaju se u geometriji oblika i odsjaju površina i kreiraju novu definiciju stila

Ultimate elegance and lightness are reflected in the geometry of shapes and glossy surface to create a new definition of style

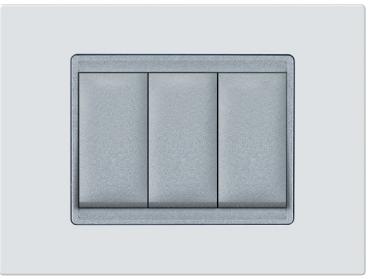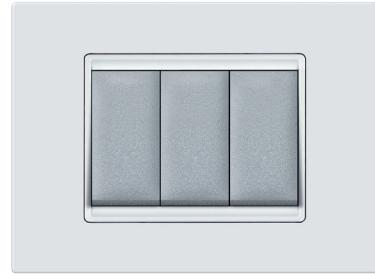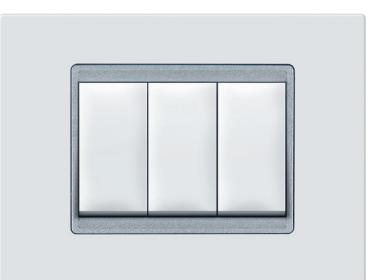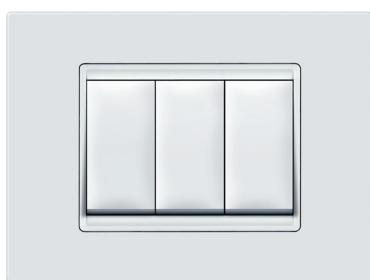

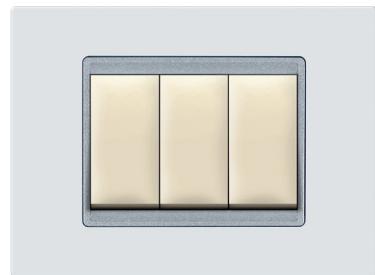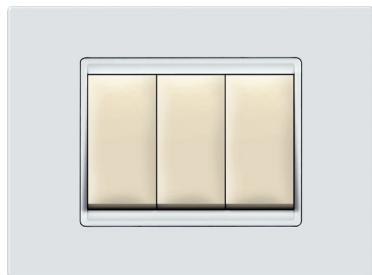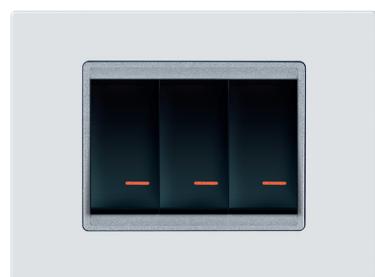




experience

BASIC

BIJELA MASKA / BIJELI NOSAČ WHITE FRAME / WHITE HOLDER




A70101.00

Maska 1M EXP
BASIC, Bijela sa
bijelim nosačem

*Cover frame 1M
EXP BASIC, white
with white frame*

- Za pokrivanje sklopa
sa jednim modulom;
- Ugradnja na noseću
prirubnicu utiskivanjem

- For covering the assembly
with one module;
- Installation onto the mounting
frame by pressing





A70102.00

Maska 2M EXP
BASIC, Bijela sa
bijelim nosačem

*Cover frame 2M
EXP BASIC, white
with white frame*

- Za pokrivanje sklopa
sa dva modula;
- Ugradnja na noseću
prirubnicu utiskivanjem

- For covering the assembly
with two modules;
- Installation onto the mounting
frame by pressing

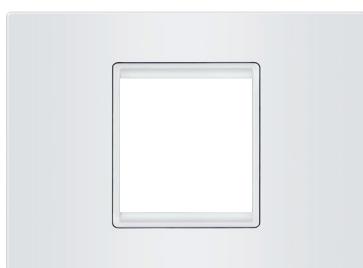


A70123.00

Maska 2/3M EXP
BASIC, Bijela sa
bijelim nosačem

*Cover frame 2/3M
EXP BASIC, white
with white frame*

- Za pokrivanje sklopa
sa dva modula;
- Ugradnja na noseću
prirubnicu utiskivanjem

- For covering the assembly
with two modules;
- Installation onto the mounting
frame by pressing

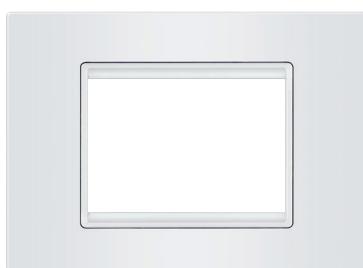

A70103.00

Maska 3M EXP
BASIC, Bijela sa
bijelim nosačem

*Cover frame 3M
EXP BASIC, white
with white frame*

- Za pokrivanje sklopa
sa tri modula;
- Ugradnja na noseću
prirubnicu utiskivanjem

- For covering the assembly
with three modules;
- Installation onto the mounting
frame by pressing



A70104.00

Maska 4M EXP
BASIC, Bijela sa
bijelim nosačem

*Cover frame 4M
EXP BASIC, white
with white frame*

- Za pokrivanje sklopa
sa četiri modula;
- Ugradnja na noseću
prirubnicu utiskivanjem

- For covering the assembly
with four modules;
- Installation onto the mounting
frame by pressing




A70162.00

Maska 3x2M EXP BASIC
vertikalna, Bijela
sa bijelim nosačem

*Cover frame 3x2M EXP
BASIC, vertical,
white with white frame*

- Za pokrivanje tri sklopa sa dva modula u vertikalnim nizajućim kutijama Ø60;
- Ugradnja na noseću prirubnicu utiskivanjem
- *For covering the three assemblies with two modules in vertical mounted boxes Ø60;*
- *Installation onto the mounting frame by pressing*




97,6 x 233,8 mm

A70142.00

Maska 2x2M EXP BASIC,
vertikalna,
Bijela sa bijelim nosačem

*Cover frame 2x2M EXP BASIC, vertical,
white with white frame*

- Za pokrivanje dva sklopa sa dva modula u vertikalnim nizajućim kutijama Ø60;
- Ugradnja na noseću prirubnicu utiskivanjem
- *For covering the two assemblies with two modules in vertical mounted box Ø60;*
- *Installation onto the mounting frame by pressing*



97,6 x 162,8 mm

A70122.00

Maska 2x2M EXP BASIC,
horizontalna, Bijela sa
bijelim nosačem

*Cover frame 2x2M EXP
BASIC, horizontal,
white with white frame*

- Za pokrivanje dva sklopa sa dva modula u horizontalnim nizajućim kutijama Ø60;
- Ugradnja na noseću prirubnicu utiskivanjem




168,6 x 91,8 mm

A70132.00

Maska 3x2M EXP BASIC,
horizontalna,
Bijela sa bijelim nosačem

*Cover frame 3x2M EXP BASIC,
horizontal, white
with white frame*

- Za pokrivanje tri sklopa sa dva modula u horizontalnim nizajućim kutijama Ø60;
- Ugradnja na noseću prirubnicu utiskivanjem




239,6 x 91,8 mm

A70106.00

Maska 6M EXP BASIC, Bijela sa
bijelim nosačem

*Cover frame 6M EXP BASIC, white
with white frame*

- Za pokrivanje sklopa sa šest modula;
- Ugradnja na noseću prirubnicu utiskivanjem



- *For covering the assembly with six modules;*
- *Installation onto the mounting frame by pressing*

187,2 x 91,8 mm

A70107.00

Maska 7M EXP BASIC, Bijela sa
bijelim nosačem

*Cover frame 7M EXP BASIC, white
with white frame*

- Za pokrivanje sklopa sa sedam modula;
- Ugradnja na noseću prirubnicu utiskivanjem



- *For covering the assembly with seven modules;*
- *Installation onto the mounting frame by pressing*

209,6 x 91,8 mm



experience

BASIC

BIJELA MASKA / CRNI NOSAČ WHITE FRAME / BLACK HOLDER

A70101.0E

Maska 1M EXP BASIC, Bijela sa crnim nosačem

Cover frame 1M EXP BASIC, white with black frame



- Za pokrivanje sklopa sa jednim modulom;
- Ugradnja na noseću prirubnicu utiskivanjem

- For covering the assembly with one module;
- Installation onto the mounting frame by pressing



97,6 x 91,8 mm

A70102.0E

Maska 2M EXP BASIC, Bijela sa crnim nosačem

Cover frame 2M EXP BASIC, white with black frame



- Za pokrivanje sklopa sa dva modula;
- Ugradnja na noseću prirubnicu utiskivanjem

- For covering the assembly with two modules;
- Installation onto the mounting frame by pressing



97,6 x 91,8 mm

A70123.0E

Maska 2/3M EXP BASIC, Bijela sa crnim nosačem

Cover frame 2/3M EXP BASIC, white with black frame



- Za pokrivanje sklopa sa dva modula;
- Ugradnja na noseću prirubnicu utiskivanjem

- For covering the assembly with two modules;
- Installation onto the mounting frame by pressing



120 x 91,8 mm

A70103.0E

Maska 3M EXP BASIC, Bijela sa crnim nosačem

Cover frame 3M EXP BASIC, white with black frame



- Za pokrivanje sklopa sa tri modula;
- Ugradnja na noseću prirubnicu utiskivanjem

- For covering the assembly with three modules;
- Installation onto the mounting frame by pressing



120 x 91,8 mm

A70104.0E

Maska 4M EXP BASIC, Bijela sa crnim nosačem

Cover frame 4M EXP BASIC, white with black frame



- Za pokrivanje sklopa sa četiri modula;
- Ugradnja na noseću prirubnicu utiskivanjem

- For covering the assembly with four modules;
- Installation onto the mounting frame by pressing




142,4 x 91,8 mm

A70162.0E

Maska 3x2M EXP BASIC
vertikalna, Bijela
sa crnim nosačem

*Cover frame 3x2M EXP
BASIC, vertical,
white with black frame*

- Za pokrivanje tri sklopa sa dva modula u vertikalnim nizajućim kutijama Ø60;
- Ugradnja na noseću prirubnicu utiskivanjem
- *For covering the three assemblies with two modules in vertical mounted boxes Ø60;*
- *Installation onto the mounting frame by pressing*




97,6 x 233,8 mm

A70142.0E

Maska 2x2M EXP BASIC,
vertikalna,
Bijela sa crnim nosačem

*Cover frame 2x2M EXP BASIC, vertical,
white with
black frame*

- Za pokrivanje dva sklopa sa dva modula u vertikalnim nizajućim kutijama Ø60;
- Ugradnja na noseću prirubnicu utiskivanjem
- *For covering the two assemblies with two modules in vertical mounted box Ø60;*
- *Installation onto the mounting frame by pressing*



97,6 x 162,8 mm

A70122.0E

Maska 2x2M EXP BASIC,
horizontalna, Bijela sa
crnim nosačem

*Cover frame 2x2M EXP
BASIC, horizontal,
white with black frame*

- Za pokrivanje dva sklopa sa dva modula u horizontalnim nizajućim kutijama Ø60;
- Ugradnja na noseću prirubnicu utiskivanjem



168,6 x 91,8 mm

A70132.0E

Maska 3x2M EXP BASIC,
horizontalna,
Bijela sa crnim nosačem

*Cover frame 3x2M EXP BASIC,
horizontal, white
with black frame*

- Za pokrivanje tri sklopa sa dva modula u horizontalnim nizajućim kutijama Ø60;
- Ugradnja na noseću prirubnicu utiskivanjem



239,6 x 91,8 mm


A70106.0E

Maska 6M EXP BASIC, Bijela sa
crnim nosačem

*Cover frame 6M EXP BASIC, white
with black frame*

- Za pokrivanje sklopa sa šest modula;
- Ugradnja na noseću prirubnicu utiskivanjem

- *For covering the assembly with six modules;*
- *Installation onto the mounting frame by pressing*



187,2 x 91,8 mm

A70107.0E

Maska 7M EXP BASIC, Bijela sa
crnim nosačem

*Cover frame 7M EXP BASIC, white
with black frame*

- Za pokrivanje sklopa sa sedam modula;
- Ugradnja na noseću prirubnicu utiskivanjem

- *For covering the assembly with seven modules;*
- *Installation onto the mounting frame by pressing*




209,6 x 91,8 mm



experience

BASIC

BIJELA MASKA / SREBRNI NOSAČ WHITE FRAME / SILVER HOLDER




A70101.0S

Maska 1M EXP
BASIC, Bijela sa
srebrnim nosačem

*Cover frame 1M
EXP BASIC, white
with Silver frame*

- Za pokrivanje sklopa
sa jednim modulom;
- Ugradnja na noseću
prirubnicu utiskivanjem

- For covering the assembly
with one module;
- Installation onto the mounting
frame by pressing




A70102.0S

Maska 2M EXP
BASIC, Bijela sa
srebrnim nosačem

*Cover frame 2M
EXP BASIC, white
with Silver frame*

- Za pokrivanje sklopa
sa dva modula;
- Ugradnja na noseću
prirubnicu utiskivanjem

- For covering the assembly
with two modules;
- Installation onto the mounting
frame by pressing

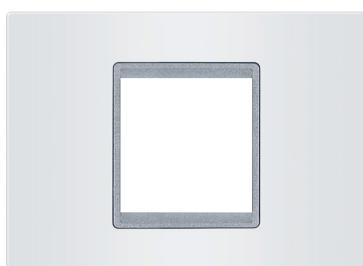



A70123.0S

Maska 2/3M EXP
BASIC, Bijela sa
srebrnim nosačem

*Cover frame 2/3M
EXP BASIC, white
with Silver frame*

- Za pokrivanje sklopa
sa dva modula;
- Ugradnja na noseću
prirubnicu utiskivanjem

- For covering the assembly
with two modules;
- Installation onto the mounting
frame by pressing

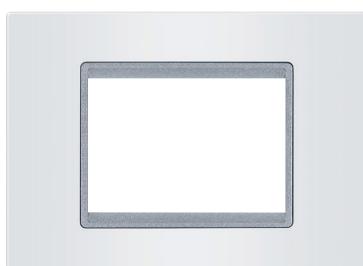

A70103.0S

Maska 3M EXP
BASIC, Bijela sa
srebrnim nosačem

*Cover frame 3M
EXP BASIC, white
with Silver frame*

- Za pokrivanje sklopa
sa tri modula;
- Ugradnja na noseću
prirubnicu utiskivanjem

- For covering the assembly
with three modules;
- Installation onto the mounting
frame by pressing



A70104.0S

Maska 4M EXP
BASIC, Bijela sa
srebrnim nosačem

*Cover frame 4M
EXP BASIC, white
with Silver frame*

- Za pokrivanje sklopa
sa četiri modula;
- Ugradnja na noseću
prirubnicu utiskivanjem

- For covering the assembly
with four modules;
- Installation onto the mounting
frame by pressing




A70162.0S

Maska 3x2M EXP BASIC
vertikalna, Bijela
sa srebrnim nosačem

*Cover frame 3x2M EXP
BASIC, vertical,
Srebrna with white okvir*

- Za pokrivanje tri sklopa sa dva modula u vertikalnim nizajućim kutijama Ø60;
- Ugradnja na noseću prirubnicu utiskivanjem
- *For covering the three assemblies with two modules in vertical mounted boxes Ø60;*
- *Installation onto the mounting frame by pressing*




97,6 x 233,8 mm

A70142.0S

Maska 2x2M EXP BASIC,
vertikalna,
Bijela sa srebrnim nosačem

*Cover frame 2x2M EXP BASIC, vertical,
white with
Srebrna okvir*



97,6 x 162,8 mm

A70122.0S

Maska 2x2M EXP BASIC,
horizontalna, Bijela sa
srebrnim nosačem

*Cover frame 2x2M EXP
BASIC, horizontal,
white with Srebrna frame*

- Za pokrivanje dva sklopa sa dva modula u horizontalnim nizajućim kutijama Ø60;
- Ugradnja na noseću prirubnicu utiskivanjem



168,6 x 91,8 mm

A70132.0S

Maska 3x2M EXP BASIC,
horizontalna,
Bijela sa srebrnim nosačem

*Cover frame 3x2M EXP BASIC,
horizontal, white
with Srebrna frame*

- Za pokrivanje tri sklopa sa dva modula u horizontalnim nizajućim kutijama Ø60;
- Ugradnja na noseću prirubnicu utiskivanjem




239,6 x 91,8 mm

A70106.0S

Maska 6M EXP BASIC, Bijela sa
srebrnim nosačem

*Cover frame 6M EXP BASIC, white
with Srebrna frame*

- Za pokrivanje sklopa sa šest modula;
- Ugradnja na noseću prirubnicu utiskivanjem



- *For covering the assembly with six modules;*
- *Installation onto the mounting frame by pressing*

- *For covering the assembly with six modules;*
- *Installation onto the mounting frame by pressing*

A70107.0S

Maska 7M EXP BASIC, Bijela sa
srebrnim nosačem

*Cover frame 7M EXP BASIC, white
with Srebrna frame*

- Za pokrivanje sklopa sa sedam modula;
- Ugradnja na noseću prirubnicu utiskivanjem



- *For covering the assembly with seven modules;*
- *Installation onto the mounting frame by pressing*

experience

BASIC CRNA / BLACK

Snaga crne boje ogleda se u smjelim kombinacijama koje će Vašem prostoru dati dozu elegantnosti

Power of black reflects in daring combinations that will give your space a dose of extravagance







experience

BASIC

CRNA MASKA / CRNI NOSAČ BLACK FRAME / BLACK HOLDER




A70101.EE

Maska 1M EXP BASIC, crna sa crnim nosačem

Cover frame 1M EXP BASIC, black with black frame

- Za pokrivanje sklopa sa jednim modulom;
- Ugradnja na noseću prirubnicu utiskivanjem

- For covering the assembly with one module;
- Installation onto the mounting frame by pressing



A70102.EE

Maska 2M EXP BASIC, crna sa crnim nosačem

Cover frame 2M EXP BASIC, black with black frame

- Za pokrivanje sklopa sa dva modula;
- Ugradnja na noseću prirubnicu utiskivanjem

- For covering the assembly with two modules;
- Installation onto the mounting frame by pressing




A70123.EE

Maska 2/3M EXP BASIC, crna sa crnim nosačem

Cover frame 2/3M EXP BASIC, black with black frame

- Za pokrivanje sklopa sa dva modula;
- Ugradnja na noseću prirubnicu utiskivanjem

- For covering the assembly with two modules;
- Installation onto the mounting frame by pressing




A70103.EE

Maska 3M EXP BASIC, crna sa crnim nosačem

Cover frame 3M EXP BASIC, black with black frame

- Za pokrivanje sklopa sa tri modula;
- Ugradnja na noseću prirubnicu utiskivanjem

- For covering the assembly with three modules;
- Installation onto the mounting frame by pressing

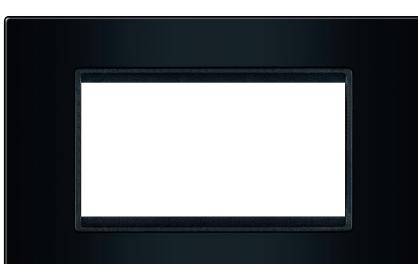

A70104.EE


Maska 4M EXP BASIC, crna sa crnim nosačem

Cover frame 4M EXP BASIC, black with black frame

- Za pokrivanje sklopa sa četiri modula;
- Ugradnja na noseću prirubnicu utiskivanjem

- For covering the assembly with four modules;
- Installation onto the mounting frame by pressing



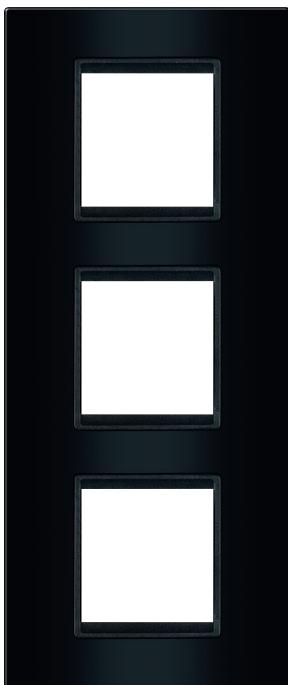


A70162.EE

Maska 3x2M EXP BASIC
vertikalna, crna
sa crnim nosačem

*Cover frame 3x2M EXP
BASIC, vertical,
black with black frame*

- Za pokrivanje tri sklopa sa dva modula u vertikalnim nizajućim kutijama Ø60;
- Ugradnja na noseću prirubnicu utiskivanjem
- *For covering the three assemblies with two modules in vertical mounted boxes Ø60;*
- *Installation onto the mounting frame by pressing*



97,6 x 233,8 mm




A70142.EE


BASIC Maska
2x2M EXP,
vertikalna,
crna sa crnim
nosačem

*Cover frame 2x2M
EXP BASIC, vertical,
black with
black frame*

- Za pokrivanje dva sklopa sa dva modula u vertikalnim nizajućim kutijama Ø60;
- Ugradnja na noseću prirubnicu utiskivanjem
- *For covering the two assemblies with two modules in vertical mounted box Ø60;*
- *Installation onto the mounting frame by pressing*



97,6 x 162,8 mm

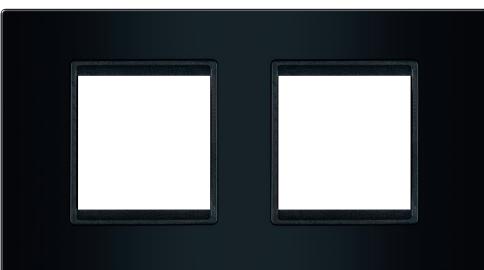


A70122.EE


Maska 2x2M EXP BASIC,
horizontalna, crna sa
crnim nosačem

*Cover frame 2x2M EXP
BASIC, horizontal,
black with black frame*

- Za pokrivanje dva sklopa sa dva modula u horizontalnim nizajućim kutijama Ø60;
- Ugradnja na noseću prirubnicu utiskivanjem



168,6 x 91,8 mm

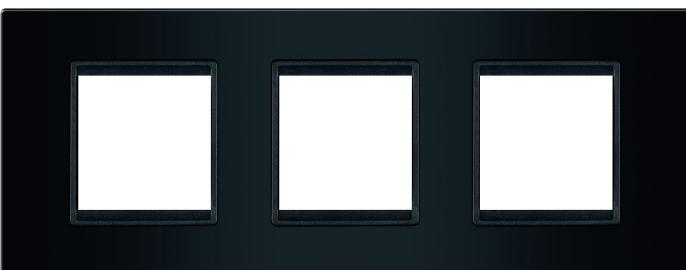


A70132.EE


Maska 3x2M
EXP BASIC,
horizontalna,
crna sa crnim
nosačem

*Cover frame 3x2M
EXP BASIC,
horizontal, black
with black frame*

- Za pokrivanje tri sklopa sa dva modula u horizontalnim nizajućim kutijama Ø60;
- Ugradnja na noseću prirubnicu utiskivanjem



239,6 x 91,8 mm

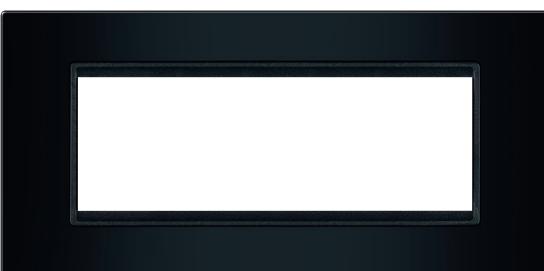

A70106.EE

Maska 6M EXP
BASIC, crna sa
crnim nosačem


*Cover frame 6M
EXP BASIC, black
with black frame*

- Za pokrivanje sklopa sa šest modula;
- Ugradnja na noseću prirubnicu utiskivanjem



- *For covering the assembly with six modules;*
- *Installation onto the mounting frame by pressing*

187,2 x 91,8 mm

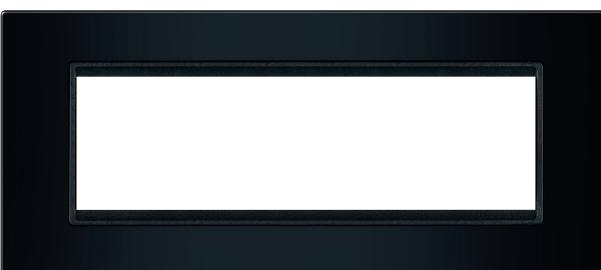


A70107.EE

Maska 7M EXP
BASIC, crna sa
crnim nosačem

*Cover frame 7M
EXP BASIC, black
with black frame*

- Za pokrivanje sklopa sa sedam modula;
- Ugradnja na noseću prirubnicu utiskivanjem



- *For covering the assembly with seven modules;*
- *Installation onto the mounting frame by pressing*


209,6 x 91,8 mm



experience

BASIC

CRNA MASKA / BIJELI NOSAČ BLACK FRAME / WHITE HOLDER




A70101.E0

Maska 1M EXP BASIC, crna sa bijelim nosačem

Cover frame 1M EXP BASIC, black with white frame

- Za pokrivanje sklopa sa jednim modulom;
- Ugradnja na noseću prirubnicu utiskivanjem

- For covering the assembly with one module;
- Installation onto the mounting frame by pressing




A70102.E0

Maska 2M EXP BASIC, crna sa bijelim nosačem

Cover frame 2M EXP BASIC, black with white frame

- Za pokrivanje sklopa sa dva modula;
- Ugradnja na noseću prirubnicu utiskivanjem

- For covering the assembly with two modules;
- Installation onto the mounting frame by pressing




A70123.E0

Maska 2/3M EXP BASIC, crna sa bijelim nosačem

Cover frame 2/3M EXP BASIC, black with white frame

- Za pokrivanje sklopa sa dva modula;
- Ugradnja na noseću prirubnicu utiskivanjem

- For covering the assembly with two modules;
- Installation onto the mounting frame by pressing




A70103.E0

Maska 3M EXP BASIC, crna sa bijelim nosačem

Cover frame 3M EXP BASIC, black with white frame

- Za pokrivanje sklopa sa tri modula;
- Ugradnja na noseću prirubnicu utiskivanjem

- For covering the assembly with three modules;
- Installation onto the mounting frame by pressing

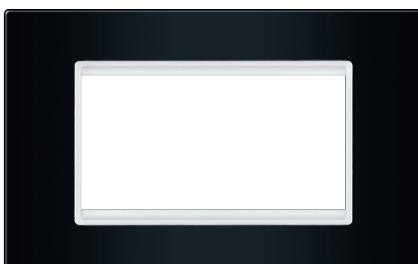

A70104.E0


Maska 4M EXP BASIC, crna sa bijelim nosačem

Cover frame 4M EXP BASIC, black with white frame

- Za pokrivanje sklopa sa četiri modula;
- Ugradnja na noseću prirubnicu utiskivanjem

- For covering the assembly with four modules;
- Installation onto the mounting frame by pressing



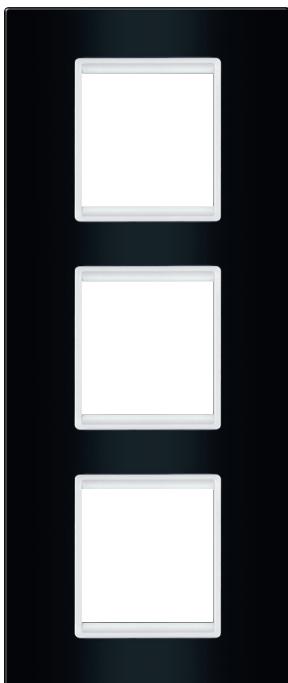


A70162.E0

Maska 3x2M EXP BASIC
vertikalna, crna
sa bijelim nosačem

*Cover frame 3x2M EXP
BASIC, vertical,
black with white frame*

- Za pokrivanje tri sklopa sa dva modula u vertikalnim nizajućim kutijama Ø60;
- Ugradnja na noseću prirubnicu utiskivanjem
- *For covering the three assemblies with two modules in vertical mounted boxes Ø60;*
- *Installation onto the mounting frame by pressing*

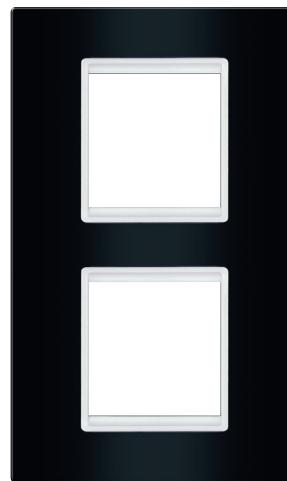


A70142.E0

Maska 2x2M
EXP BASIC,
vertikalna,
crna sa bijelim
nosačem


*Cover frame 2x2M
EXP BASIC, vertical,
black with
white frame*

- Za pokrivanje dva sklopa sa dva modula u vertikalnim nizajućim kutijama Ø60;
- Ugradnja na noseću prirubnicu utiskivanjem
- *For covering the two assemblies with two modules in vertical mounted box Ø60;*
- *Installation onto the mounting frame by pressing*



97,6 x 162,8 mm

97,6 x 233,8 mm

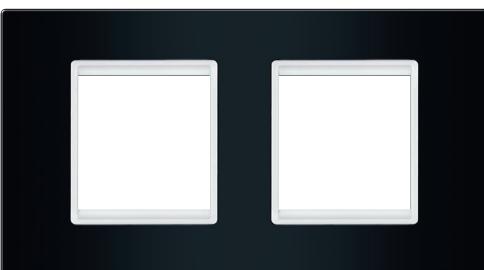


A70122.E0

Maska 2x2M EXP BASIC,
horizontalna, crna sa
bijelim nosačem

*Cover frame 2x2M EXP
BASIC, horizontal,
black with white frame*

- Za pokrivanje dva sklopa sa dva modula u horizontalnim nizajućim kutijama Ø60;
- Ugradnja na noseću prirubnicu utiskivanjem



168,6 x 91,8 mm




A70132.E0


Maska 3x2M
EXP BASIC,
horizontalna,
crna sa bijelim
nosačem

*Cover frame 3x2M
EXP BASIC,
horizontal, black
with white frame*

- Za pokrivanje tri sklopa sa dva modula u horizontalnim nizajućim kutijama Ø60;
- Ugradnja na noseću prirubnicu utiskivanjem



239,6 x 91,8 mm

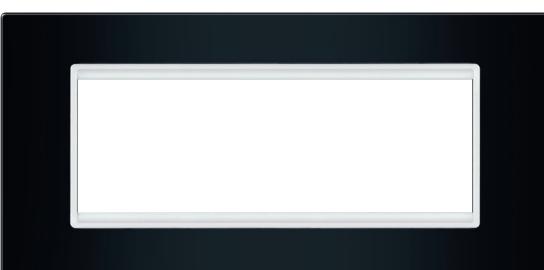

A70106.E0

Maska 6M EXP
BASIC, crna sa
bijelim nosačem


*Cover frame 6M
EXP BASIC, black
with white frame*

- Za pokrivanje sklopa sa šest modula;
- Ugradnja na noseću prirubnicu utiskivanjem



- *For covering the assembly with six modules;*
- *Installation onto the mounting frame by pressing*

187,2 x 91,8 mm

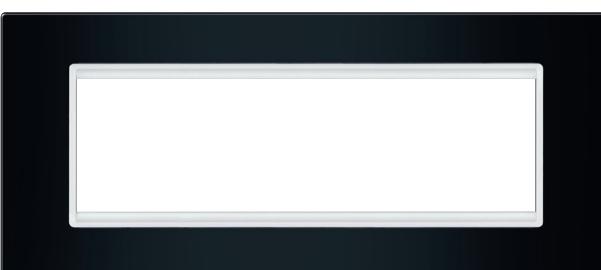

A70107.E0

Maska 7M EXP
BASIC, crna sa
bijelim nosačem

*Cover frame 7M
EXP BASIC, black
with white frame*

- Za pokrivanje sklopa sa sedam modula;
- Ugradnja na noseću prirubnicu utiskivanjem



209,6 x 91,8 mm


- *For covering the assembly with seven modules;*
- *Installation onto the mounting frame by pressing*



experience

BASIC

CRNA MASKA / SREBRNI NOSAČ BLACK FRAME / SILVER HOLDER



A70101.ES

Maska 1M EXP
BASIC, crna sa
srebrnim nosačem

*Cover frame 1M
EXP BASIC, black
with silver frame*

- Za pokrivanje sklopa
sa jednim modulom;
- Ugradnja na noseću
prirubnicu utiskivanjem

- For covering the assembly
with one module;
- Installation onto the mounting
frame by pressing



97,6 x 91,8 mm



A70102.ES

Maska 2M EXP
BASIC, crna sa
Srebrna nosačem


*Cover frame 2M
EXP BASIC, black
with silver frame*

- Za pokrivanje sklopa
sa dva modula;
- Ugradnja na noseću
prirubnicu utiskivanjem

- For covering the assembly
with two modules;
- Installation onto the mounting
frame by pressing



97,6 x 91,8 mm

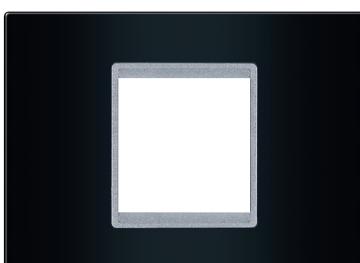

A70123.ES

Maska 2/3M EXP
BASIC, crna sa
srebrnim nosačem

*Cover frame 2/3M
EXP BASIC, black
with silver frame*

- Za pokrivanje sklopa
sa dva modula;
- Ugradnja na noseću
prirubnicu utiskivanjem

- For covering the assembly
with two modules;
- Installation onto the mounting
frame by pressing



120 x 91,8 mm



A70103.ES

Maska 3M EXP
BASIC, crna sa
srebrnim nosačem


*Cover frame 3M
EXP BASIC, black
with silver frame*

- Za pokrivanje sklopa
sa tri modula;
- Ugradnja na noseću
prirubnicu utiskivanjem

- For covering the assembly
with three modules;
- Installation onto the mounting
frame by pressing



120 x 91,8 mm

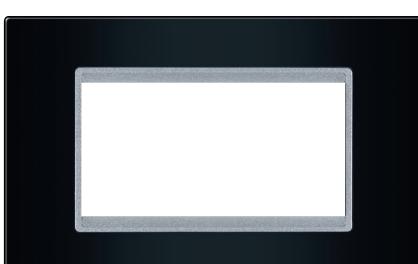

A70104.ES

Maska 4M EXP
BASIC, crna sa
srebrnim nosačem


*Cover frame 4M
EXP BASIC, black
with silver frame*

- Za pokrivanje sklopa
sa četiri modula;
- Ugradnja na noseću
prirubnicu utiskivanjem

- For covering the assembly
with four modules;
- Installation onto the mounting
frame by pressing



142,4 x 91,8 mm

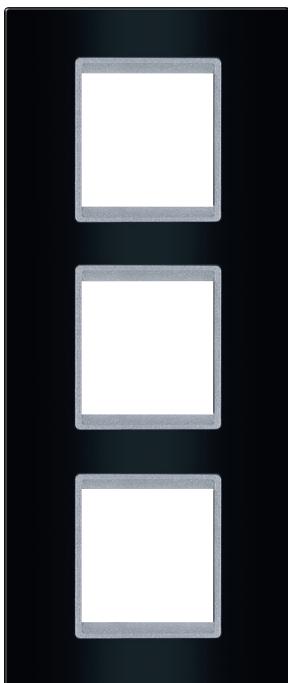


A70162.ES


Maska 3x2M EXP BASIC
vertikalna, crna
sa srebrnim nosačem

*Cover frame 3x2M EXP
BASIC, vertical,
black with silver frame*

- Za pokrivanje tri sklopa sa dva modula u vertikalnim nizajućim kutijama Ø60;
- Ugradnja na noseću prirubnicu utiskivanjem
- *For covering the three assemblies with two modules in vertical mounted boxes Ø60;*
- *Installation onto the mounting frame by pressing*



97,6 x 233,8 mm

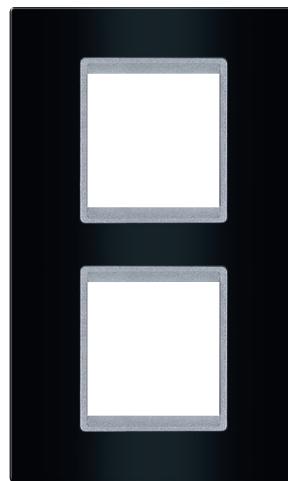


A70142.ES


Maska 2x2M
EXP BASIC,
vertikalna,
crna sa srebrnim
nosačem

*Cover frame 2x2M
EXP BASIC, vertical,
black with
silver frame*

- Za pokrivanje dva sklopa sa dva modula u vertikalnim nizajućim kutijama Ø60;
- Ugradnja na noseću prirubnicu utiskivanjem
- *For covering the two assemblies with two modules in vertical mounted box Ø60;*
- *Installation onto the mounting frame by pressing*



97,6 x 162,8 mm

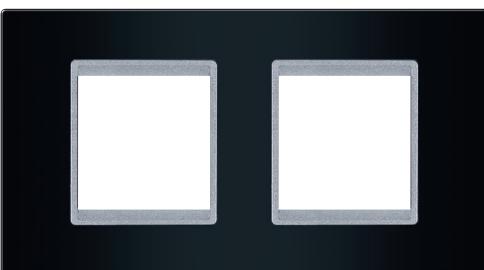

A70122.ES

Maska 2x2M EXP BASIC,
horizontalna, crna sa
srebrnim nosačem

*Cover frame 2x2M EXP
BASIC, horizontal,
black with silver frame*

- Za pokrivanje dva sklopa sa dva modula u horizontalnim nizajućim kutijama Ø60;
- Ugradnja na noseću prirubnicu utiskivanjem



168,6 x 91,8 mm




A70132.ES

Maska 3x2M
EXP BASIC,
horizontalna,
crna sa srebrnim
nosačem

*Cover frame 3x2M
EXP BASIC,
horizontal, black
with silver frame*

- Za pokrivanje tri sklopa sa dva modula u horizontalnim nizajućim kutijama Ø60;
- Ugradnja na noseću prirubnicu utiskivanjem



239,6 x 91,8 mm



A70106.ES

Maska 6M EXP
BASIC, crna sa
srebrnim nosačem

*Cover frame 6M
EXP BASIC, black
with silver frame*

- Za pokrivanje sklopa sa šest modula;
- Ugradnja na noseću prirubnicu utiskivanjem



187,2 x 91,8 mm




A70107.ES

Maska 7M EXP
BASIC, crna sa
srebrnim nosačem

*Cover frame 7M
EXP BASIC, black
with silver frame*

- Za pokrivanje sklopa sa sedam modula;
- Ugradnja na noseću prirubnicu utiskivanjem



209,6 x 91,8 mm

- *For covering the two assemblies with two modules in horizontal mounted box Ø60;*
- *Installation onto the mounting frame by pressing*

- *For covering the three assemblies with two modules in horizontal mounted boxes Ø60;*
- *Installation onto the mounting frame by pressing*

- *For covering the assembly with six modules;*
- *Installation onto the mounting frame by pressing*








- *For covering the assembly with seven modules;*
- *Installation onto the mounting frame by pressing*


experience

BASIC SREBRNA/SILVER

Srebrna tekstura za moderne interijere i kao modni dodatak na Vašem zidu

Silver texture for modern interiors and as a fashion accessory to your wall

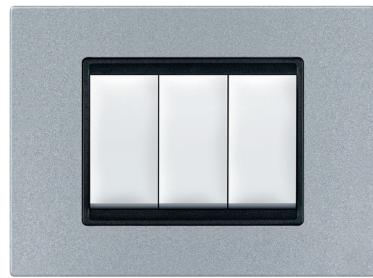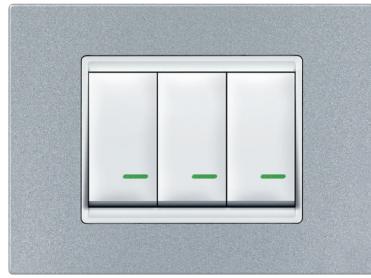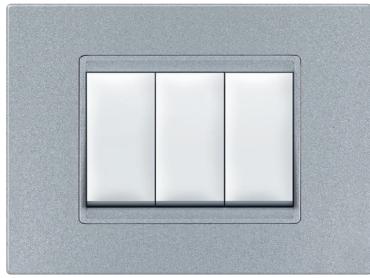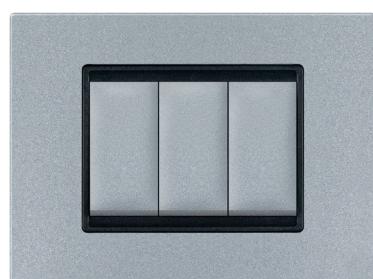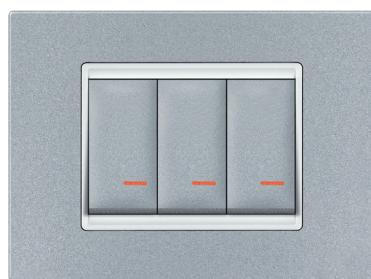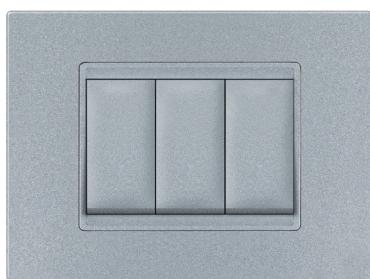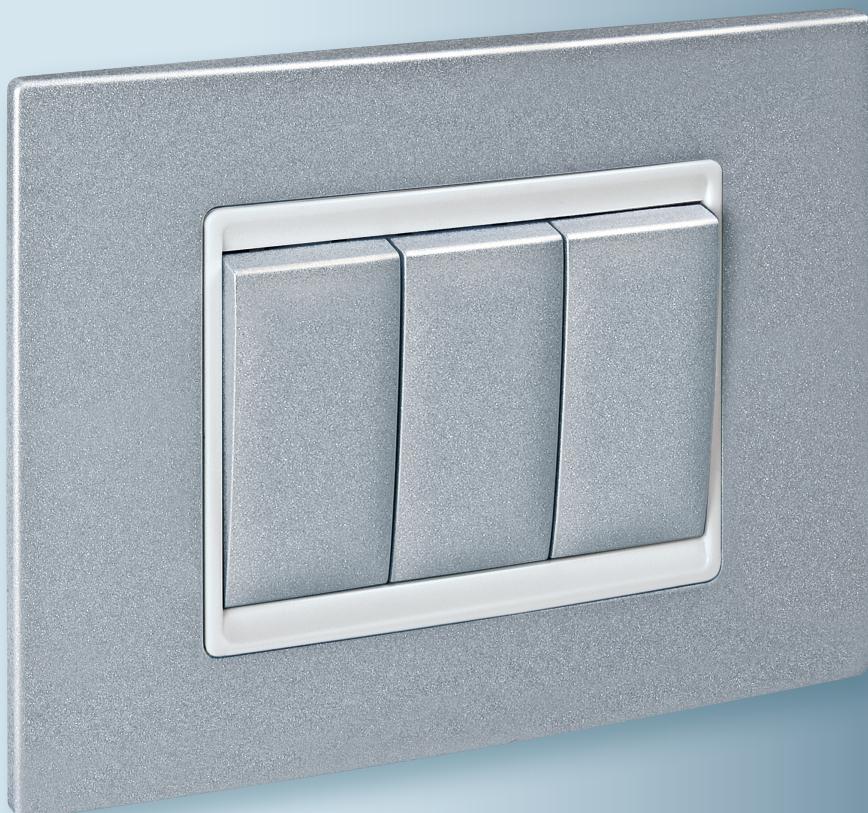

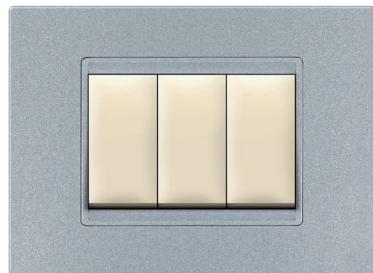




experience

BASIC

SREBRNA MASKA / SREBRNA NOSAČ SILVER FRAME / SILVER HOLDER




A70101.SS

Maska 1M EXP
BASIC, Srebrna sa
srebrnim nosačem

*Cover frame 1M
EXP BASIC, Silver
with silver frame*

- Za pokrivanje sklopa
sa jednim modulom;
- Ugradnja na noseću
prirubnicu utiskivanjem



- For covering the assembly
with one module;
- Installation onto the mounting
frame by pressing



A70102.SS


Maska 2M EXP
BASIC, Srebrna sa
srebrnim nosačem

*Cover frame 2M
EXP BASIC, Silver
with silver frame*

- Za pokrivanje sklopa
sa dva modula;
- Ugradnja na noseću
prirubnicu utiskivanjem



- For covering the assembly
with two modules;
- Installation onto the mounting
frame by pressing

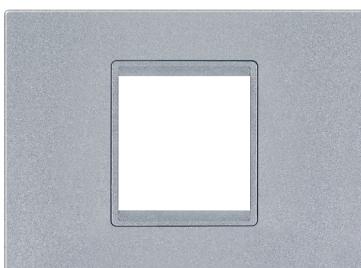

A70123.SS


Maska 2/3M EXP
BASIC, Srebrna sa
srebrnim nosačem

*Cover frame 2/3M EXP
BASIC, Silver with
frame*

- Za pokrivanje sklopa
sa dva modula;
- Ugradnja na noseću
prirubnicu utiskivanjem



- For covering the assembly
with two modules;
- Installation onto the mounting
frame by pressing

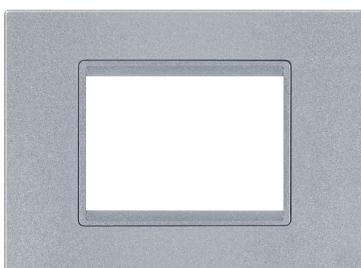

A70103.SS

Maska 3M EXP
BASIC, Srebrna sa
srebrnim nosačem

*Cover frame 3M
EXP BASIC, silver
frame*

- Za pokrivanje sklopa
sa tri modula;
- Ugradnja na noseću
prirubnicu utiskivanjem



- For covering the assembly
with three modules;
- Installation onto the mounting
frame by pressing



A70104.SS

Maska 4M EXP
BASIC, Srebrna sa
srebrnim nosačem

*Cover frame 4M
EXP BASIC, silver
with silver frame*

- Za pokrivanje sklopa
sa četiri modula;
- Ugradnja na noseću
prirubnicu utiskivanjem




- For covering the assembly
with four modules;
- Installation onto the mounting
frame by pressing

A70162.SS

Maska 3x2M EXP BASIC vertikalna, Srebrna sa srebrnim nosačem

Cover frame 3x2M EXP BASIC, vertical, silver with silver frame

- Za pokrivanje tri sklopa sa dva modula u vertikalnim nizajućim kutijama Ø60;
- Ugradnja na noseću prirubnicu utiskivanjem
- *For covering the three assemblies with two modules in vertical mounted boxes Ø60;*
- *Installation onto the mounting frame by pressing*




97,6 x 233,8 mm

A70142.SS

Maska 2x2M EXP BASIC, vertikalna, Srebrna sa srebrnim nosačem

Cover frame 2x2M EXP BASIC, vertical, silver with silver frame

- Za pokrivanje dva sklopa sa dva modula u vertikalnim nizajućim kutijama Ø60;
- Ugradnja na noseću prirubnicu utiskivanjem
- *For covering the two assemblies with two modules in vertical mounted box Ø60;*
- *Installation onto the mounting frame by pressing*



97,6 x 162,8 mm

A70122.SS

Maska 2x2M EXP BASIC, horizontalna, Srebrna sa srebrnim nosačem

Cover frame 2x2M EXP BASIC, horizontal, silver with silver frame

- Za pokrivanje dva sklopa sa dva modula u horizontalnim nizajućim kutijama Ø60;
- Ugradnja na noseću prirubnicu utiskivanjem



168,6 x 91,8 mm

A70132.SS

Maska 3x2M EXP BASIC, horizontalna, Srebrna sa srebrnim nosačem

Cover frame 3x2M EXP BASIC, horizontal, silver with silver frame

- Za pokrivanje tri sklopa sa dva modula u horizontalnim nizajućim kutijama Ø60;
- Ugradnja na noseću prirubnicu utiskivanjem



239,6 x 91,8 mm

A70106.SS

Maska 6M EXP BASIC, Srebrna sa srebrnim nosačem

Cover frame 6M EXP BASIC, silver with silver frame

- Za pokrivanje sklopa sa šest modula;
- Ugradnja na noseću prirubnicu utiskivanjem



- *For covering the assembly with six modules;*
- *Installation onto the mounting frame by pressing*

- *For covering the assembly with seven modules;*
- *Installation onto the mounting frame by pressing*




- *For covering the assembly with seven modules;*
- *Installation onto the mounting frame by pressing*

A70107.SS

Maska 7M EXP BASIC, Srebrna sa srebrnim nosačem

Cover frame 7M EXP BASIC, silver with silver frame

- Za pokrivanje sklopa sa sedam modula;
- Ugradnja na noseću prirubnicu utiskivanjem



- *For covering the assembly with seven modules;*
- *Installation onto the mounting frame by pressing*


- *For covering the assembly with seven modules;*
- *Installation onto the mounting frame by pressing*



experience

BASIC

SREBRNA MASKA / BIJELI NOSAČ SILVER FRAME / WHITE HOLDER




A70101.S0


Maska 1M EXP
BASIC, Srebrna sa
bijelim nosačem

*Cover frame 1M
EXP BASIC, silver
with white holder*

- Za pokrivanje sklopa
sa jednim modulom;
- Ugradnja na noseću
prirubnicu utiskivanjem



- For covering the assembly
with one module;
- Installation onto the mounting
frame by pressing




A70102.S0


Maska 2M EXP
BASIC, Srebrna sa
bijelim nosačem

*Cover frame 2M
EXP BASIC, silver
with white holder*

- Za pokrivanje sklopa
sa dva modula;
- Ugradnja na noseću
prirubnicu utiskivanjem



- For covering the assembly
with two modules;
- Installation onto the mounting
frame by pressing

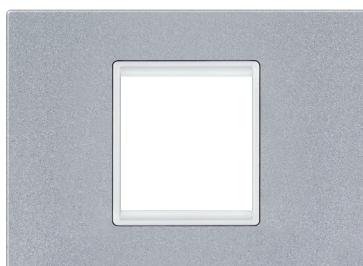


A70123.S0


Maska 2/3M EXP
BASIC, Srebrna sa
bijelim nosačem

*Cover frame 2/3M
EXP BASIC, silver
with white holder*

- Za pokrivanje sklopa
sa dva modula;
- Ugradnja na noseću
prirubnicu utiskivanjem



- For covering the assembly
with two modules;
- Installation onto the mounting
frame by pressing

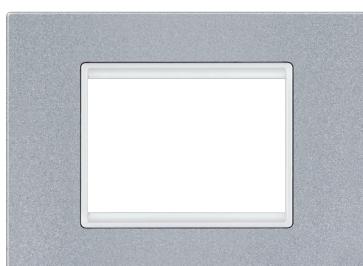

A70103.S0


Maska 3M EXP
BASIC, Srebrna sa
bijelim nosačem

*Cover frame 3M
EXP BASIC, silver
with white holder*

- Za pokrivanje sklopa
sa tri modula;
- Ugradnja na noseću
prirubnicu utiskivanjem



- For covering the assembly
with three modules;
- Installation onto the mounting
frame by pressing

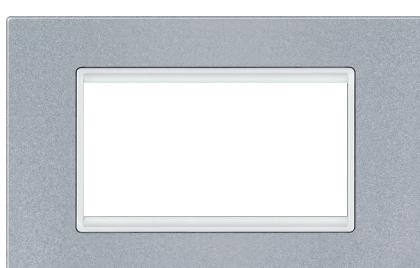

A70104.S0

Maska 4M EXP
BASIC, Srebrna sa
bijelim nosačem

*Cover frame 4M
EXP BASIC, silver
with white holder*

- Za pokrivanje sklopa
sa četiri modula;
- Ugradnja na noseću
prirubnicu utiskivanjem




- For covering the assembly
with four modules;
- Installation onto the mounting
frame by pressing

A70162.S0

Maska 3x2M EXP BASIC
vertikalna, Srebrna
sa bijelim nosačem

*Cover frame 3x2M EXP
BASIC, vertical,
silver with white holder*

- Za pokrivanje tri sklopa sa dva modula u vertikalnim nizajućim kutijama Ø60;
- Ugradnja na noseću prirubnicu utiskivanjem
- *For covering the three assemblies with two modules in vertical mounted boxes Ø60;*
- *Installation onto the mounting frame by pressing*




97,6 x 233,8 mm

A70142.S0

Maska 2x2M EXP BASIC,
vertikalna, Srebrna sa bijelim nosačem

*Cover frame 2x2M EXP BASIC, vertical,
silver with white holder*

- Za pokrivanje dva sklopa sa dva modula u vertikalnim nizajućim kutijama Ø60;
- Ugradnja na noseću prirubnicu utiskivanjem
- *For covering the two assemblies with two modules in vertical mounted box Ø60;*
- *Installation onto the mounting frame by pressing*




97,6 x 162,8 mm

A70122.S0

Maska 2x2M EXP BASIC,
horizontalna, Srebrna sa bijelim nosačem

*Cover frame 2x2M EXP
BASIC, horizontal,
silver with white holder*

- Za pokrivanje dva sklopa sa dva modula u horizontalnim nizajućim kutijama Ø60;
- Ugradnja na noseću prirubnicu utiskivanjem




168,6 x 91,8 mm

A70132.S0

Maska 3x2M EXP BASIC,
horizontalna, Srebrna sa bijelim nosačem

*Cover frame 3x2M EXP BASIC,
horizontal, silver
with white holder*

- Za pokrivanje tri sklopa sa dva modula u horizontalnim nizajućim kutijama Ø60;
- Ugradnja na noseću prirubnicu utiskivanjem



239,6 x 91,8 mm

A70106.S0

Maska 6M EXP BASIC, Srebrna sa bijelim nosačem

*Cover frame 6M EXP BASIC, silver
with white holder*

- Za pokrivanje sklopa sa šest modula;
- Ugradnja na noseću prirubnicu utiskivanjem



187,2 x 91,8 mm

A70107.S0

Maska 7M EXP BASIC, Srebrna sa bijelim nosačem

*Cover frame 7M EXP BASIC, silver
with white holder*

- Za pokrivanje sklopa sa sedam modula;
- Ugradnja na noseću prirubnicu utiskivanjem



- *For covering the assembly with seven modules;*
- *Installation onto the mounting frame by pressing*

209,6 x 91,8 mm



experience

BASIC

SREBRNA MASKA / CRNI NOSAČ SILVER FRAME / BLACK HOLDER




A70101.SE

Maska 1M EXP
BASIC, Srebrna sa
crnim nosačem

*Cover frame 1M
EXP BASIC, silver
with black holder*

- Za pokrivanje sklopa
sa jednim modulom;
- Ugradnja na noseću
prirubnicu utiskivanjem



- For covering the assembly
with one module;
- Installation onto the mounting
frame by pressing



A70102.SE

Maska 2M EXP
BASIC, Srebrna sa
crnim nosačem

*Cover frame 2M
EXP BASIC, silver
with black holder*

- Za pokrivanje sklopa
sa dva modula;
- Ugradnja na noseću
prirubnicu utiskivanjem



- For covering the assembly
with two modules;
- Installation onto the mounting
frame by pressing




A70123.SE

Maska 2/3M EXP
BASIC, Srebrna sa
crnim nosačem

*Cover frame 2/3M
EXP BASIC, silver
with black holder*

- Za pokrivanje sklopa
sa dva modula;
- Ugradnja na noseću
prirubnicu utiskivanjem



- For covering the assembly
with two modules;
- Installation onto the mounting
frame by pressing



A70103.SE

Maska 3M EXP
BASIC, Srebrna sa
crnim nosačem

*Cover frame 3M
EXP BASIC, silver
with black holder*

- Za pokrivanje sklopa
sa tri modula;
- Ugradnja na noseću
prirubnicu utiskivanjem



- For covering the assembly
with three modules;
- Installation onto the mounting
frame by pressing



A70104.SE

Maska 4M EXP
BASIC, Srebrna sa
crnim nosačem

*Cover frame 4M
EXP BASIC, silver
with black holder*

- Za pokrivanje sklopa
sa četiri modula;
- Ugradnja na noseću
prirubnicu utiskivanjem




- For covering the assembly
with four modules;
- Installation onto the mounting
frame by pressing

A70162.SE

Maska 3x2M EXP BASIC vertikalna, Srebrna sa crnim nosačem

Cover frame 3x2M EXP BASIC, vertical, silver with black holder

- Za pokrivanje tri sklopa sa dva modula u vertikalnim nizajućim kutijama Ø60;
- Ugradnja na noseću prirubnicu utiskivanjem
- *For covering the three assemblies with two modules in vertical mounted boxes Ø60;*
- *Installation onto the mounting frame by pressing*




97,6 x 233,8 mm

A70142.SE

Maska 2x2M EXP BASIC, vertikalna, Srebrna sa crnim nosačem

Cover frame 2x2M EXP BASIC, vertical, silver with black holder

- Za pokrivanje dva sklopa sa dva modula u vertikalnim nizajućim kutijama Ø60;
- Ugradnja na noseću prirubnicu utiskivanjem
- *For covering the two assemblies with two modules in vertical mounted box Ø60;*
- *Installation onto the mounting frame by pressing*



97,6 x 162,8 mm

A70122.SE

Maska 2x2M EXP BASIC, horizontalna, Srebrna sa crnim nosačem

Cover frame 2x2M EXP BASIC, horizontal, silver with black holder

- Za pokrivanje dva sklopa sa dva modula u horizontalnim nizajućim kutijama Ø60;
- Ugradnja na noseću prirubnicu utiskivanjem



168,6 x 91,8 mm

A70132.SE

Maska 3x2M EXP BASIC, horizontalna, Srebrna sa crnim nosačem

Cover frame 3x2M EXP BASIC, horizontal, silver with black holder

- Za pokrivanje tri sklopa sa dva modula u horizontalnim nizajućim kutijama Ø60;
- Ugradnja na noseću prirubnicu utiskivanjem



239,6 x 91,8 mm

A70106.SE

Maska 6M EXP BASIC, Srebrna sa crnim nosačem

Cover frame 6M EXP BASIC, silver with holder holder

- Za pokrivanje sklopa sa šest modula;
- Ugradnja na noseću prirubnicu utiskivanjem

- *For covering the assembly with six modules;*
- *Installation onto the mounting frame by pressing*



187,2 x 91,8 mm


A70107.SE

Maska 7M EXP BASIC, Srebrna sa crnim nosačem







Cover frame 7M EXP BASIC, silver with black holder

- Za pokrivanje sklopa sa sedam modula;
- Ugradnja na noseću prirubnicu utiskivanjem

- *For covering the assembly with seven modules;*
- *Installation onto the mounting frame by pressing*



209,6 x 91,8 mm

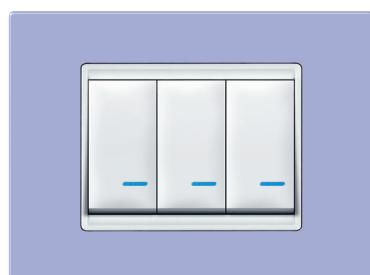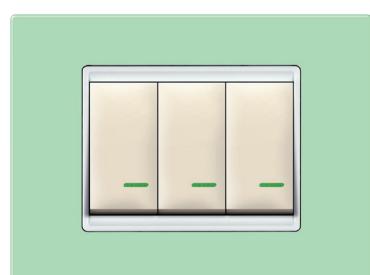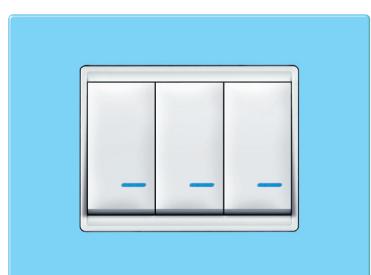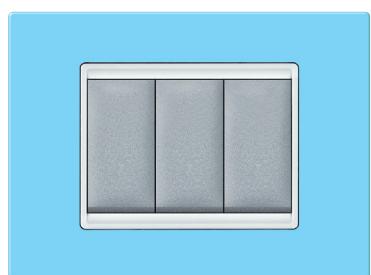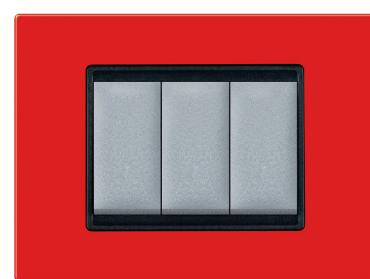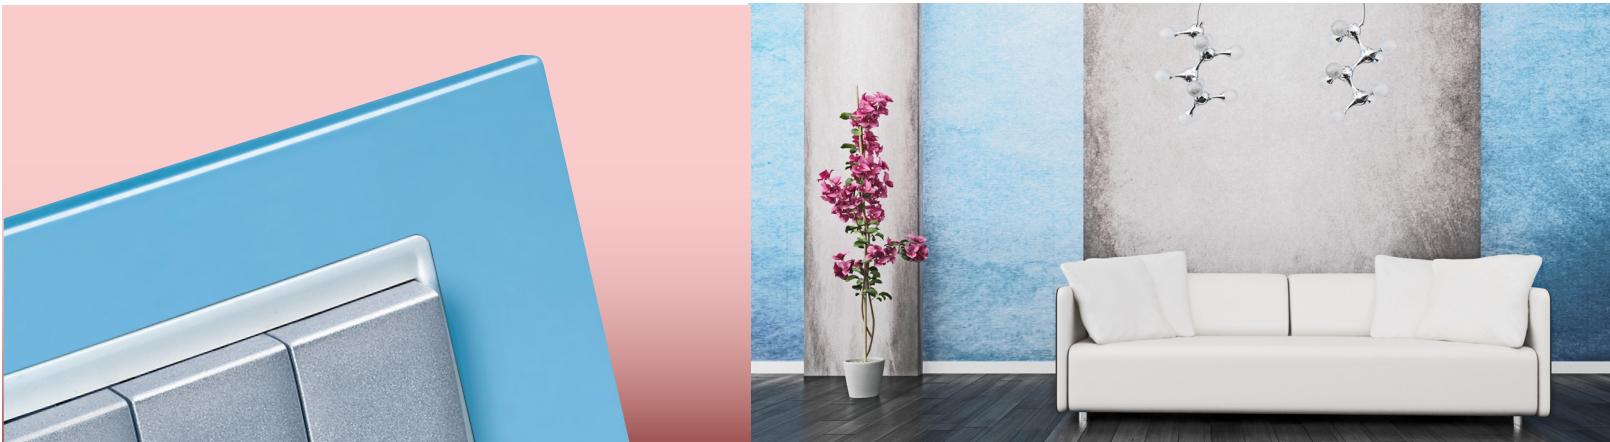

experience

BOJA VIVID

Raznovrsnost nijansi u jasnim formama pruža veliki broj kombinacija boja


Playfull coloring in clear forms provides a variety of combinations of design



x = 2

Grafit


Graphite

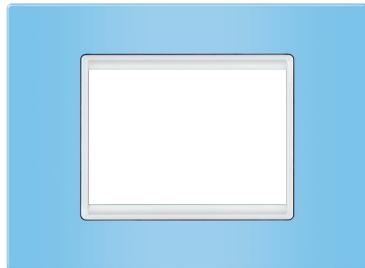

x = 5

Pastel plava

Pastel blue

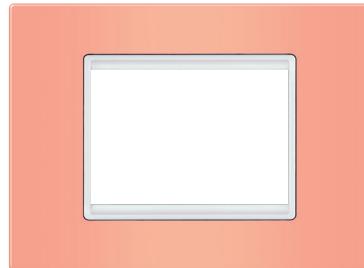

x = N

Pastel narandžasta


Pastel orange



x = 9

Krem


Beige

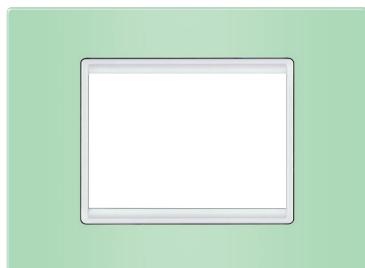

x = 7

Pastel zelena

Pastel green

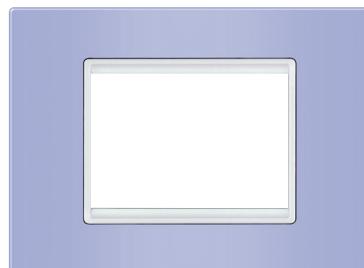

x = V

Lavanda

Lavander



x = 4

Crvena

Red




1M
70201.x




2M
70202.x




2/3M
70223.x



3M
70203.x




2x2M
70242.x




3x2M
70262.x




2x2M
70222.x




3x2M
70232.x












4M
70204.x



6M
70206.x



7M
70207.x

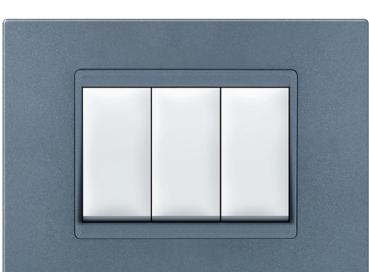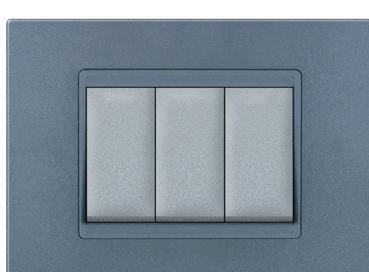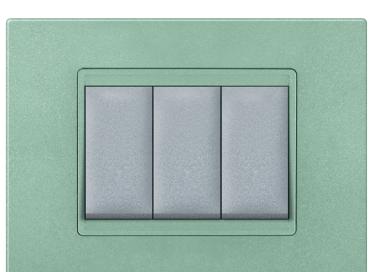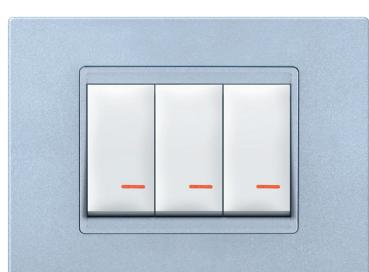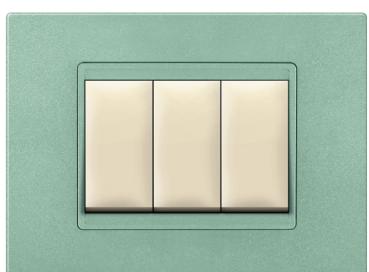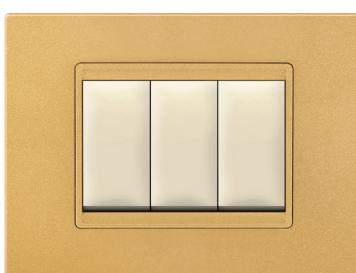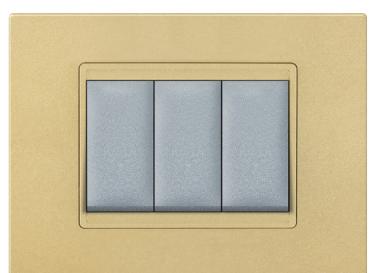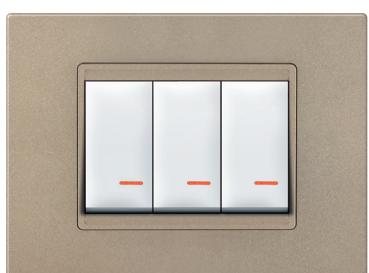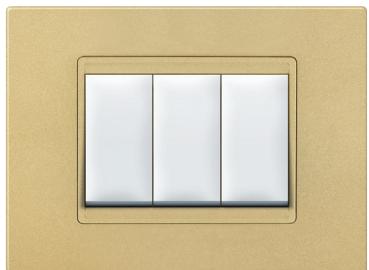


experience

BOJA METALLIC


Metalik efekt daje vašem zidu dozu luksuza

Metallic effect gives your wall a dose of luxury

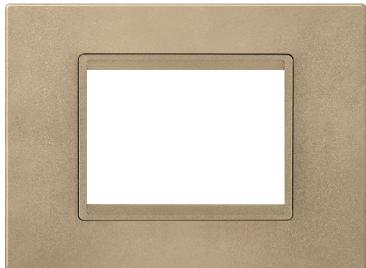


x = G2

Brušeni nikl
Brushed nickel

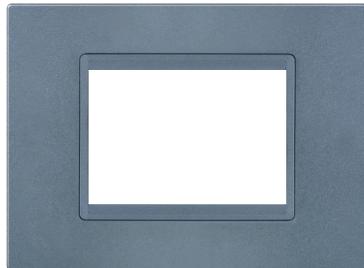


x = S1

Antik Srebrna
Antique Silver

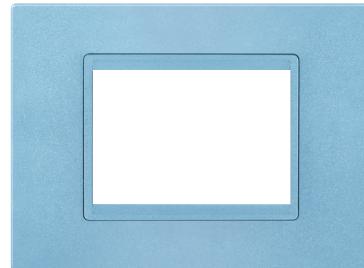


x = P

Plava metalik
Blue metallic

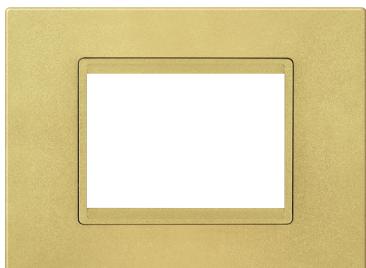


x = G1

Zlatna sjaj
Shiny gold

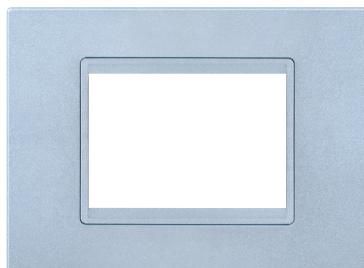


x = U

Aluminij
Aluminium

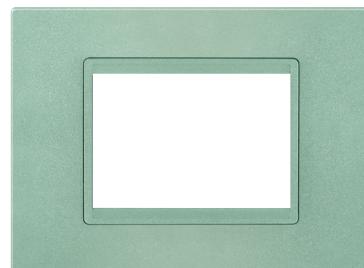

x = Z

Zelena metalik
Green metallic

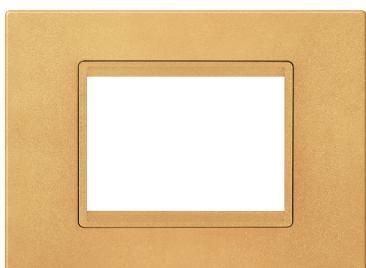

x = G

Zlatna
Gold



1M
A70301.x



2M
A70302.x



2/3M
A70323.x




3M
A70303.x



2x2M
A70342.x



3x2M
A70362.x




2x2M
A70322.x




3x2M
A70332.x






4M
A70304.x



6M
A70306.x



7M
A70307.x

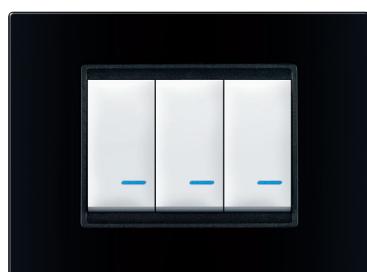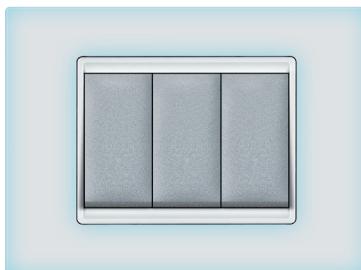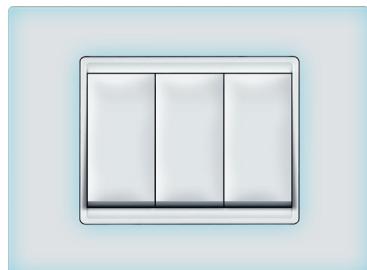

LJEPOTA SKRIVENA U DODIRU

Nova linija maski programa
Experience budi u korisniku
još jedno čulo: čulo dodira.

Mekana, nježna površina -
specifičnost koja naglašava
sofisticirani izgled.

Maske soft touch proizvode se u
dvije osnovne boje: crnoj i bijeloj (sky
blue).

Novina se ogleda u bijeloj masci
koja samo u mraku svijetli
plavičastim svjetlom,
pa otuda i naziv sky blue.

BEAUTY HIDDEN IN TOUCH

*New line of frames arouses in user
a new feeling: a sense of touch.*

*Soft, tender surface - a distinctive feature
that highlights a sophisticated look.*

*Soft touch frames are produced in two
basic colors: black and white (sky blue).*



*Originality is reflected in the white frame
that glows in the dark by bluish light,
hence the name is sky blue.*

experience

BOJA SOFT TOUCH

Kada se svjetlo ugasi soft touch sky blue uvodi vas u novi svijet dekorativnih maski



When the light is off, sky blue soft touch brings you into the new world of decorative frames

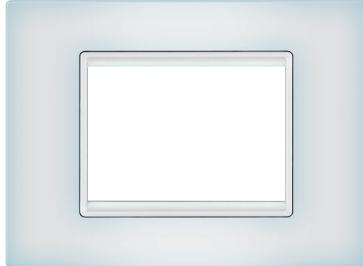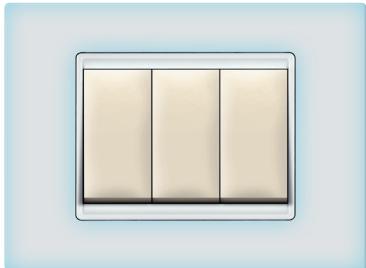

x = K1

Sky blue


Sky blue

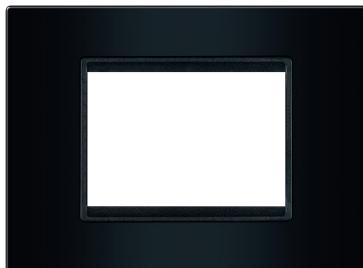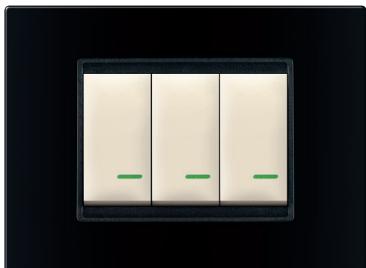

x = E1

Crna soft


Soft black

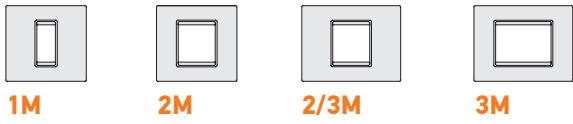

1M
A70401.x



2M
A70402.x



2/3M
A70423.x



3M
A70403.x





4M
A70404.x



6M
A70406.x



7M
A70407.x

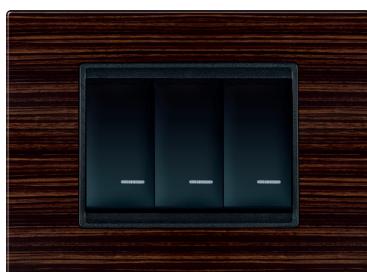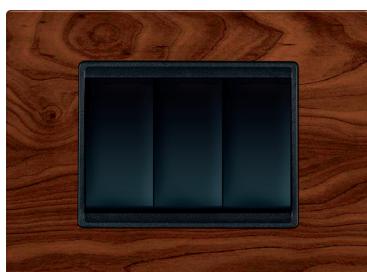

DOZA RUSTIČNOSTI U VAŠEM DOMU

Dekorativne maske od punog drveta daju prostoru zemljani, prirođan izgled. Ono što ih čini jedinstvenim su karakteristike i šare samog drveta od kojeg su izrađene.

A DOSE OF RUSTICITY AT YOUR HOME

Decorative cover masks made of solid wood are bringing the living area earthy, natural look. What make them unique are characteristics and patterns of the wood they are made of.

experience

EXCLUSIVE DRVO/WOOD

Četiri elegantne vrste za
tradicionalne prostore i korisnike
koji uživaju u toplini punog drveta

*Four elegant woods
for traditional spaces and users
that enjoys the warmth of solid wood*



x = J

Javor

Maple



x = Y

Trešnja

Cherry



x = W

Wenge

Wenge




x = R

Orah


Nut



2M
A70502.x







3M
A70503.x



4M
A70504.x



7M
A70507.x

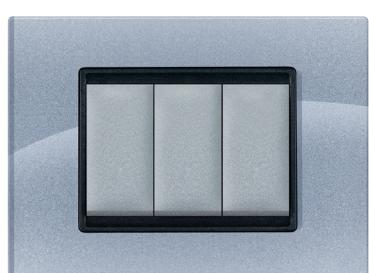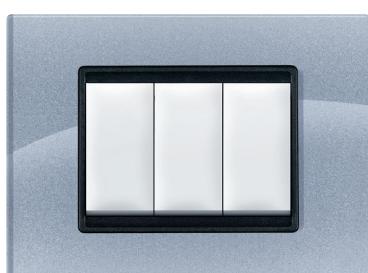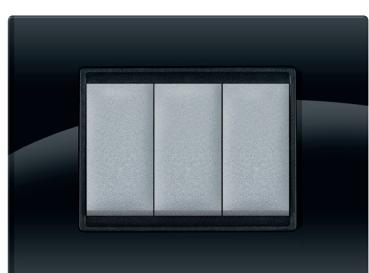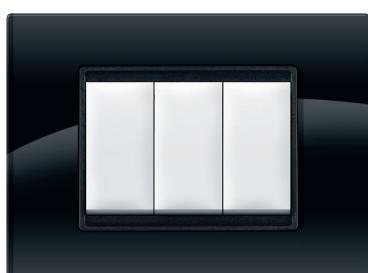

**ČISTO I
SENZUALNO...
EKSTRAVAGANTNO
I SJAJNO...**

Staklo je jedan od osnovnih materijala u našim životnim prostorima već nekoliko vjekova i sve do današnjih dana sve više pronađe svoje mjesto u dizajnu interijera.

**PURE AND
SENSUAL...
EXTRAVAGANT
AND SHINY...**

Glass is one of the basic materials in our living spaces for several centuries and until today more and more finds its place in interior design.

experience

EXCLUSIVE STAKLO/GLASS

Osvojiti će svaki prostor koji prati najnovije trendove u dizajnu interijera

*Fulfill every space
that follows the latest trends
in interior design*



x = 0

Kristal bijela

Chystal white



x = E

Kristal crna

Crystal black



x = S

Ice srebrna

Ice Srebrna




x = 7

Koral


Coral



2M
A70602.x







3M
A70603.x



4M
A70604.x



7M
A70607.x

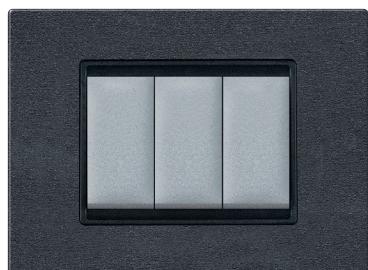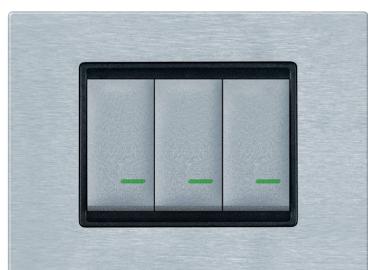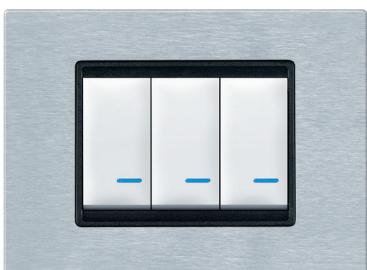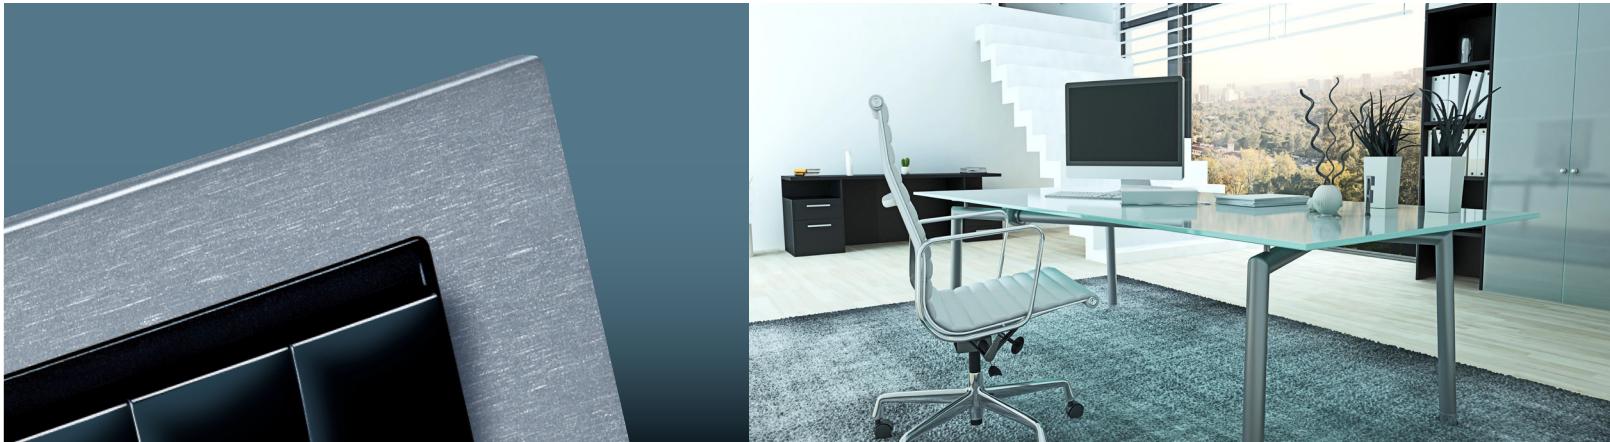

IZVANREDAN... JASAN... TRAJAN... PLEMENIT... METAL

Exclusive linija programa Experience obogaćena je još jednim prirodnim materijalom – metalom.

Metal kao materijal budi u korisniku osjećaj trajnosti i robustnosti.

Metal kao detalj na zidu oslikava karakter vlasnika i zasigurno budi pažnju promatrača.

U kombinaciji sa jasnim geometrijskim linijama i grubim površinama dekorativne maske od metala lako su uklopive u rustične, ali i u ultra moderne domove.

OUTSTANDING... CLEAR... DURABLE... NOBLE... METAL

Exclusive line in Experience is enriched with another natural material - metal.

Metal as a material arouse in user a sense of durability and robustness.

Metal as a detail on the wall reflects the character of owners and certainly awakes the attention of viewer.

In combination with clear geometric lines and rough surfaces metal covering masks are easy fitting in rustic and in ultra modern homes.

experience

EXCLUSIVE METAL

Moć ljevanog metala pretočena
u eleganciju za jedinstvene prostore

*Distinctive materials
for unique spaces*



x = Q

Titannij

Titanium



x = U

Aluminij

Aluminum



x = A1

Antracit kristal

Anthracite crystal



x = C1

Bakar patina


Copper patina




2M
A70702.x



3M
A70703.x



4M
A70704.x



7M
A70707.x



experience


UGRADNJA INSTALLATION

- Montažne kutije Ø60
- Installation boxes Ø60

- Montažne kutije za modularni program
- Installation boxes for modular program




○




1M



○



2M



2/3M



□






3M





□



4M

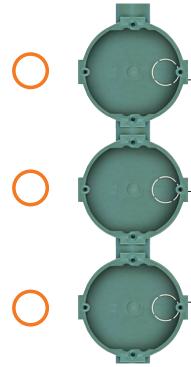

3x2M



2x2M



3x2M



2x2M



6M




7M



experience

PRIRUBNICE MOUNTING FRAMES




A71001

Prirubnica
1M EXP
za šuplji zid

*Mounting
frame 1M EXP
for hollow wall*

- Za ugradnju jednog modula;
- Ugradnja u montažnu kutiju Ø60 pomoću vijaka

- For one module installation;
- Installation into the mounting box Ø60 by screws




A71101

Prirubnica
1M EXP
sa stezaljkom

*Mounting
frame 1M EXP
with claws*

- Za ugradnju jednog modula;
- Ugradnja u montažnu kutiju Ø60 pomoću stegača

- For one module installation;
- Installation into the mounting box Ø60 by clamps




A71002

Prirubnica
2M EXP
za šuplji zid

*Mounting
frame 2M EXP
for hollow wall*

- Za ugradnju dva modula;
- Ugradnja u montažnu kutiju Ø60 pomoću vijaka

- For two module installation;
- Installation into the mounting box Ø60 by screws




A71102

Prirubnica
2M EXP
sa stezaljkom

*Mounting
frame 2M EXP
with claws*

- Za ugradnju dva modula;
- Ugradnja u montažnu kutiju Ø60 pomoću stegača

- For two module installation;
- Installation into the mounting box Ø60 by clamps

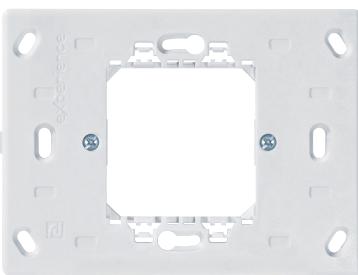

A71123


Prirubnica
2/3M EXP
sa stezaljkom

*Mounting
frame 2/3M EXP
with claws*

- Za ugradnju dva modula;
- Ugradnja u montažnu kutiju Ø60 pomoću stegača

- For two module installation;
- Installation into the mounting box Ø60 by clamps



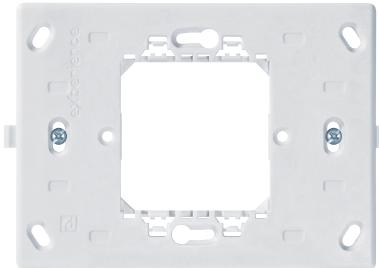

A71023

Prirubnica
2/3M EXP
sa vijcima

*Mounting
frame 2/3M EXP
with screws*

- Za ugradnju dva modula;
- Ugradnja u montažnu kutiju 3M pomoću vijaka

- *For two module installation;*
- *Installation into the mounting box by screws*




A71003

Prirubnica
3M EXP
sa vijcima

*Mounting
frame 3M EXP
with screws*

- Za ugradnju tri modula;
- Ugradnja u montažnu kutiju 3M pomoću vijaka

- *For three module installation;*
- *Installation into the mounting box by screws*

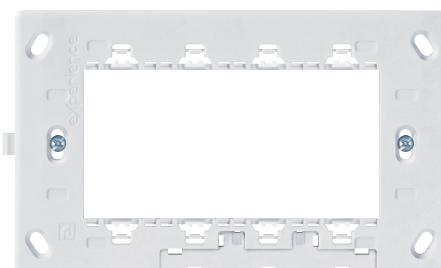


A71004

Prirubnica
4M EXP
sa vijcima

*Mounting
frame 4M EXP
with screws*

- Za ugradnju četiri modula;
- Ugradnja u montažnu kutiju 4M pomoću vijaka

- *For four module installation;*
- *Installation into the mounting box by screws*

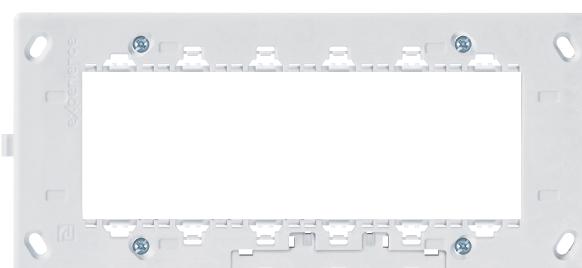

A71006

Prirubnica
6M EXP
sa vijcima

*Mounting
frame 6M EXP
with screws*

- Za ugradnju šest modula;
- Ugradnja u montažnu kutiju 6M pomoću vijaka

- *For six module installation;*
- *Installation into the mounting box by screws*



A71007

Prirubnica
7M EXP
sa vijcima

*Mounting
frame 7M EXP
with screws*

- Za ugradnju sedam modula;
- Ugradnja u montažnu kutiju 7M pomoću vijaka

- *For seven module installation;*
- *Installation into the mounting box by screws*



S404184

Set vijaka M3,5 x 35
pakiranje 50 kom

*Screw set M3,5 x
35 pack. 50 pcs.*




S404149

Set vijaka M3,5 x 50
pakiranje 50 kom

*Screw set M3,5 x
50 pack. 50 pcs.*

PRIRUBNICE SA LED OSVJETLJENJEM MOUNTING FRAMES WITH LED LIGHTNING

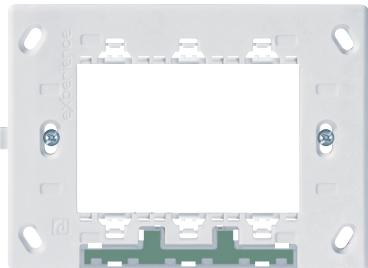


A71303.5

Prirubnica
3M EXP sa vijcima
i LED osvjetljenjem
plavo svijetlo,

*Mounting
frame 3M EXP
with screws
and LED lightning,
blue light*

- Za ugradnju tri modula;
- Ugradnja u montažnu
kutiju pomoću vijaka

- For three module
installation;
- Installation into the
mounting box
by screws

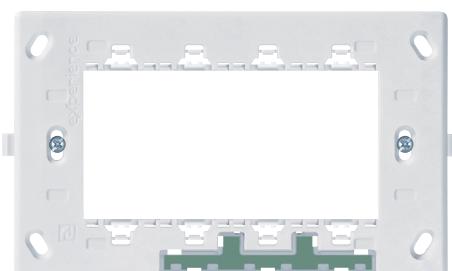


A71304.5

Prirubnica
4M EXP sa vijcima
i LED osvjetljenjem
plavo svijetlo,

*Mounting
frame 4M EXP
with screws
and LED lightning,
blue light*

- Za ugradnju četiri modula;
- Ugradnja u montažnu
kutiju pomoću vijaka

- For four module
installation;
- Installation into the
mounting box
by screws

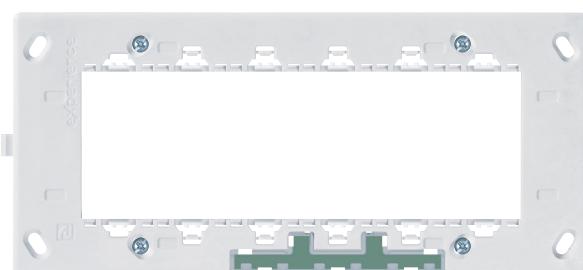


A71306.5

Prirubnica
6M EXP sa vijcima
i LED osvjetljenjem
plavo svijetlo,

*Mounting
frame 6M EXP
with screws
and LED lightning,
blue light*

- Za ugradnju šest modula;
- Ugradnja u montažnu
kutiju pomoću vijaka

- For six module
installation;
- Installation into the
mounting box
by screws

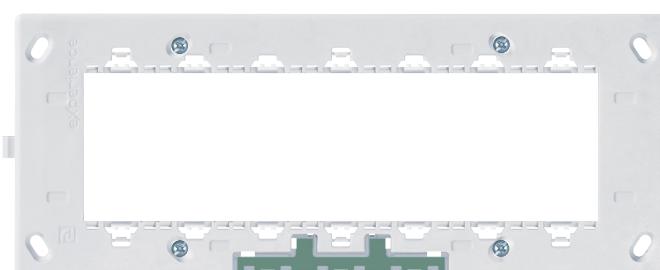

A71307.5

Prirubnica
7M EXP sa vijcima
i LED osvjetljenjem
plavo svijetlo,

*Mounting
frame 7M EXP
with screws
and LED lightning,
blue light*

- Za ugradnju sedam modula;
- Ugradnja u montažnu
kutiju pomoću vijaka

- For seven module
installation;
- Installation into the
mounting box
by screws



experience

MONTAŽNI PRIBOR INSTALLATION ACCESSORIES



S404137

Poklopac za kutiju PM3/VM3, BIJELA

Ornamental cover for PM3/VM3, white

S404138

Poklopac za kutiju PM4/VM4, BIJELA

Ornamental cover for PM4/VM4, white


S404234

Poklopac za kutiju PM7/VM7, BIJELA

Ornamental cover for PM7/VM7, white

- Poklopac za zatvaranje montažne kutije kada se koristi kao razvodna ili za izjednačenje potencijala;
- Ugradnja na montažnu kutiju vijcima

- Cover for mounting box when is used as junction box or equipotentializing;
- Installation onto the mounting box by screws

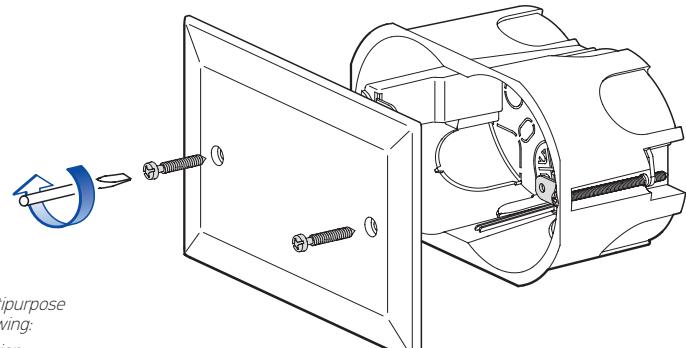

- Montaža kutije za 3, 4 i 7 modula poseduje i posebne ukrasne poklopce koji se na kutiju pričvršćuju vlijcima. Poklopci imaju višestruku namenu i obezbeđuju sledeće:
 - Mogućnost korišćenja montažnih kutija, kao razvodne instalacione kutije.
 - Mogućnost da se izvede dodatna instalacija koja će se naknadno povezati i koristiti,
 - Mogućnost upotrebe montažnih kutija kao kutija za izjednačenje potencijala uz primenu odgovarajućih rednih stezaljki.

- The installation boxes for 3, 4 or 7 modules have the special ornamental covers to be fixed to the box by screws. The covers are intended for multipurpose application and provide the following:
 - Possibility of using the installation boxes as the junction boxes.
 - Possibility of connecting and using the additional installations.
 - Possibility of using the installation boxes as potential equalizing boxes by applying the appropriate block terminals.

* Halogen free



S404124

Zaštitni poklopac za kutiju PM3

Protecting cover for PM3 installation box

S404125

Zaštitni poklopac za kutiju PM4

Protecting cover for PM4 installation box


S404126

Zaštitni poklopac za kutiju PM7

Protecting cover for PM7 installation box

- Poklopac za zaštitu kutije i vodiča prilikom malterisanja;
- Snabdeven signalnim pipcima radi lakšeg pronađenja nakon malterisanja;
- Ugradnja na montažnu kutiju utiskivanjem

- Protective cover for mounting box and conducting wires during plastering;
- With signal extensions for easier finding after plastering;
- Installation on the mounting box by pressing

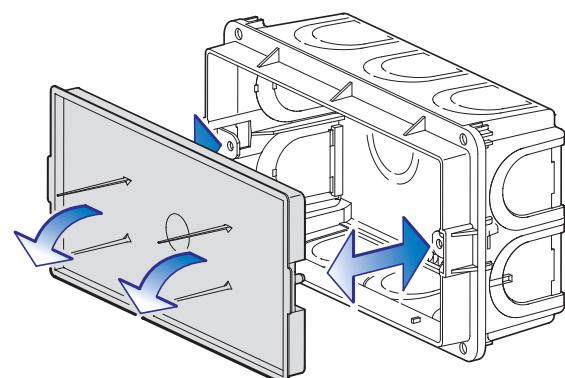

- Kod ugradnje montažnih kutija u pune zidove unutrašnjost kutije se zaštićuje zaštitnim poklopcom koji prilikom radova osigurava neometani rad.
- Nakon sušenja žbuke zidova poklopac se jednostavno izvadi zajedno sa dijelom žbuke koji je preko njega.
- Unutrašnjost kutije i provodnici ostaju čisti.

- When installing, the installation boxes into the solid walls, the internal parts of the box are to be protected by the protecting cover which provides the trouble-free wall plastering.
- After drying, the cover can be simply taken out together with a part of plaster over it.
- The internal part of the box and the conducting wires remain clean.

* Halogen free

experience

MONTAŽNE KUTIJE ZA PUNI ZID INSTALLATION BOXES FOR SOLID WALL



650°C, 500V~

S404006

Montažna kutija
Ø60 x 40 mm
nizajuća za
rastojanje 71mm

*Two-gang
installation box
Ø60 x 40 mm
for sequencing
71mm step*

S404005

Montažna kutija
Ø60 x 60 mm
nizajuća za
rastojanje 71mm

*Two-gang
installation box
Ø60 x 60 mm
for sequencing
71mm step*


S404144

Montažna kutija
Ø60 x 40 mm
nizajuća za
rastojanje 80mm

*Two-gang
installation box
Ø60 x 40 mm
for sequencing
80mm step*

- Usuglašeno sa IEC 60570-1
- Ugradnja u zid,
- Mogućnost instalacije pomoću stezaljke ili vijaka

- Compiled with IEC 60670-1
- Flush mounted,
- Accessory installation by clamps or screw



650°C, 400V~

S404121

Montažna kutija
PM3 za 3M
za puni zid, 50 mm

*Two-gang
installation box
PM3 for 3M
for solid wall, 50 mm*

S404235

Montažna kutija
PM3 za 3M
za puni zid, 65 mm

*Two-gang
installation box
PM3 for 3M
for solid wall, 65 mm*

- Kutija za ugradnju trostrukе prirubnice;
- Ugradnja u puni zid pod žbukу

- Mounting box for three gang mounting frame;
- Installation into the solid wall



650°C, 400V~

S404122

Montažna kutija
PM4 za 4M
za puni zid, 50 mm

*Four-gang
installation box
PM4 for 4M
for solid wall, 50 mm*

S404236

Montažna kutija
PM4 za 4M
za puni zid, 65 mm

*Four-gang
installation box
PM4 for 4M
for solid wall, 65 mm*

- Kutija za ugradnju četvorostruke prirubnice;
- Ugradnja u puni zid pod žbukу

- Mounting box for four gang mounting frame;
- Installation into the solid wall



650°C, 400V~

S404123

Montažna kutija
PM7 za 6M/7M
za puni zid, 50 mm

*Seven-gang
installation box
PM7 for 6M/7M
for solid wall, 50 mm*

S404237

Montažna kutija
PM7 za 6M/7M
za puni zid, 65 mm

*Seven-gang
installation box
PM7 for 6M/7M
for solid wall, 65 mm*

- Kutija za ugradnju sedmorostruke prirubnice;
- Ugradnja u puni zid pod žbukу

- Mounting box for seven gang mounting frame;
- Installation into the solid wall



* Halogen free

MONTAŽNE KUTIJE ZA ŠUPLJI ZID INSTALLATION BOXES FOR HOLLOW WALL




S404238

Montažna kutija
Ø60 x 40 mm
za šuplji zid

*Two-gang
installation box
Ø60 x 40 mm
for hollow wall*

850°C, 400V~

- Ugradnja u šuplji zid pomoću kandži sa vijcima
- Installation into the hollow wall by screw clamps

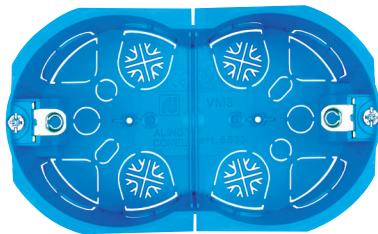


S404129

Montažna kutija
VM3 za 3M
za šuplji zid, 50 mm

*Two-gang
installation box
VM3 for 3M
for hollow wall, 50 mm*

850°C, 400V~

- Kutija za ugradnju trostrukе prirubnice;
- Ugradnja u šuplji zid pomoću kandži sa vijcima
- Mounting box for three gang mounting frame;
- Installation into the hollow wall by screw clamps

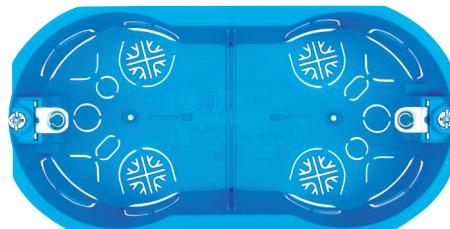


S404130

Montažna kutija
VM4 za 4M
za šuplji zid, 50 mm

*Four-gang
installation box
VM4 for 4M
for hollow wall, 50 mm*

850°C, 400V~

- Kutija za ugradnju četvorostruke prirubnice;
- Ugradnja u šuplji zid pomoću kandži sa vijcima
- Mounting box for four gang mounting frame;
- Installation into the hollow wall by screw clamps

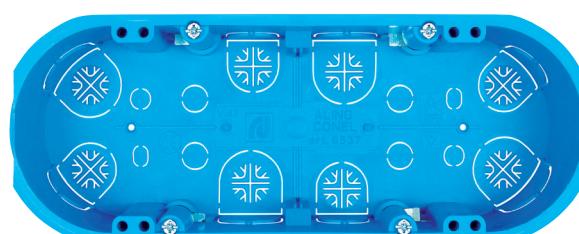

S404131

Montažna kutija
VM7 za 6M/7M
za šuplji zid, 50 mm

*Seven-gang
installation box
VM7 for 6M/7M
for hollow wall, 50 mm*

850°C, 400V~

- Kutija za ugradnju sedmorostruke prirubnice;
- Ugradnja u šuplji zid pomoću kandži sa vijcima
- Mounting box for seven gang mounting frame;
- Installation into the hollow wall by screw clamps

* Halogen free

ANTIBAKTERIJSKI PROGRAM ANTIBACTERIAL PROGRAM

A73101.0

Tipkalo EXP 1M
Button EXP 1M

- Tipkalo 1M širine 22,2mm,
- Za prekidače bez indikacije;
- Ugradnja na prekidač utiskivanjem

- Button 1M width 22,2mm,
- For switches without indication;
- Installation onto the switch by pressing

A73201.0

Tipkalo
sa indikacijom
EXP 1M

*Button
with indicator
EXP 1M*

- Tipkalo 1M širine 22,2mm,
- Za prekidače sa indikacijom
- Ugradnja na prekidač utiskivanjem

- Button 1M width 22,2mm,
- For switches with indication;
- Installation onto the switch by pressing

A73301.0

Tipkalo EXP 2M
Button EXP 2M

- Tipkalo 2M širine 44,4mm,
- Za prekidače bez indikacije;
- Ugradnja na prekidač utiskivanjem

- Button 2M width 44,4mm,
- For switches without indication;
- Installation onto the switch by pressing

A73401.0

Tipkalo
sa indikacijom
EXP 2M

*Button
with indicator
EXP 2M*

- Tipkalo 2M širine 44,4mm,
- Za prekidače bez indikacije;
- Ugradnja na prekidač utiskivanjem

- Button 2M width 44,4mm,
- For switches with indication
- Installation onto the switch by pressing

A70001.0

Poklopac maske
(slepi modul)
EXP 1M

*Blank module
EXP 1M*

- Za pokrivanje slepih modula širine 22,2mm
- Ugradnja u noseću prirubnicu utiskivanjem
- For blank module covering 22,2mm width;
- Installation into the mounting frame by pressing

A74201.0

Keystone
nosač
EXP 1M

*Keystone
okvir
EXP 1M*

- Modul širine 22,2mm za nošenje Keystone konektora
- Ugradnja u noseću prirubnicu utiskivanjem
- Module 22,2mm width for Keystone connectors holding
- Installation into the mounting frame by pressing



ČUVAR VAŠEG ZDRAVLJA

- Antibakterijski program izrađen u standardnom ALING EXPERIENCE dizajnu i isključivo u bijeloj boji ima funkciju zaštite korisnika od prenošenja bakterija, virusa, mikroba i glijivica čestim dodirivanjem. Dnevno više korisnika dodiruje tipkalo, utičnice, maske. Ovo je naročito izraženo u javnim i zdravstvenim ustanovama tako da je prednja površina idealno mjesto za razvoj i širenje bakterija.
- Specijalni aditivi na bazi srebrnih jona koji se dodaju u plastične mase tokom vremena uništavaju i sprječavaju dalje širenje bakterija na površini plastike. Zahvaljujući ovim karakteristikama srebra postiže se veoma efikasna i dugotrajna zaštita zdravlja svih korisnika koji dolaze u dodir sa prekidačima, maskama i utičnicama.
- Prvenstveno je značajna primjena u svim prostorima gdje se zahtjeva visoki stupanj higijene kao što su bolnice i druge zdravstvene ustanove, restorani, autobusne i željezničke stanice, aerodromi, školske ustanove, stanovi sa bolesnima osobama osjetljivim na bakterije i virusе, stanovi zdravstvenih radnika, trgovaci i poslovni centri, javne ustanove (sudovi, općine, muzeji, kinodvorane, sportski objekti i sl.).
- Proizvodi su testirani u skladu sa standardom JIS Z 2801 i posjeduju visoki stupanj redukcije bakterija na površini plastike.
- Održavanje i čišćenje se sprovodi isto kao i kod proizvoda koji nemaju antibakterijsku zaštitu.
- Proizvodi su identični kao i standardni program sa dodatom oznakom A ispred oznake proizvoda.
- Sve maske antibakterijskog programa označene su znakom raspoznavanja

YOUR HEALTH GUARDIAN

- Antibacterial program made in standard ALING MODE design and exclusively in white color has a function to protect user from transmission of bacterial, viruses, microbes and fungi during the often touching. During the day more users touches the switch buttons, covering frames and socket blocks. It is especially expressed in the public and medical institutions, so that the front surface is perfect place for growth and spread of bacteria.
- The special additives on Srebrna ions that were added to plastic compounds damage and block bacteria spread on the plastic surface. With the help of this Srebrna characteristic there is very efective and long term protection of health for all users which are in contact with switches, covering frames and sockets.
- At the first time application is important at the places where a high level of hygiene is required like hospitals and other medical institutions, restaurants, bus and train stations, airports, schools, apartments with the sick persons which are sensitive on bacteria and viruses, medical employees apartments, shoping and buisiness centers, public institutions (courthouses, townships, museums, cinemas, sport arenas).
- The products are tested according the standard JIS Z 2801 and they have a high level of bacteria reduction on plastic surface.
- Cleaning and maintenance is same like products without antibacterial protection.
- Products are identical with standard program with additional mark A ahead of product mark.
- All covering frames are marked with sign of recognition



A74102.0

Utičnica dvopolna sa zaštitom kontakata
16A 250V~ EXP 2M

*2 pole socket outlet
with safety shutter
16A 250V~ EXP 2M*

- Usuglašeno sa IEC 60884-1
- Ugradnja u noseću prirubnicu utiskivanjem

- Complied with IEC 60884-1
- Installation into the mounting frame by pressing



A74104.0T

Utičnica dvopolna sa prozirnim poklopcom i zaštitom kontakata
16A 250V~ EXP 2M

*2 pole socket outlet
with transparent cover
and safety shutter
16A 250V~ EXP 2M*

- Usuglašeno sa IEC 60884-1
- Ugradnja u noseću prirubnicu utiskivanjem

- Complied with IEC 60884-1
- Installation into the mounting frame by pressing



A72121.0

Utičnica dvopolna
10A 250V~
EXP1M, CEI 23-50/
P11 talijanska

*2 pole socket outlet
CEI 10A 250V~
EXP 1M*

- Usuglašeno sa CEI 23-50/P11;
- Ugradnja u noseću prirubnicu utiskivanjem

- Complied with CEI 23-50/P11;
- Installation into the mounting frame by pressing




A74263.0

Utičnica antenska TV IEC
završna 5dB EXP
1M

*TV aerial socket
end-line 5db
IEC EXP 1M*

- Usuglašeno sa IEC 169-2 - muški konektor;
- Montaža antenskog kabla preko vijčane veze;
- Prigušenje signala cca 5dB;
- Ugradnja u noseću prirubnicu utiskivanjem

- Complied with IEC 169-2 - M connector;
- Installation of aerial cable by screw terminals;
- Signal attenuation approx. 5dB;
- Installation into the mounting frame by pressing



A70102.0



Maska
2M EXP,
ANTIBACTERIAL,
Bijela

Cover frame
2M EXP,
ANTIBACTERIAL,
white



- Za pokrivanje sklopa sa dva modula;
- Ugradnja na noseću prirubnicu utiskivanjem

- For covering the assembly with two modules;
- Installation onto the mounting frame by pressing

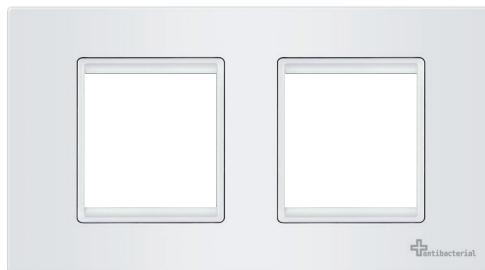


A70122.0

Maska 2x2M EXP,
ANTIBACTERIAL,
horizontalna, Bijela

Cover frame
2x2M, EXP,
ANTIBACTERIAL,
horizontal, white

- Za pokrivanje dva sklopa sa dva modula u horizontalnim nizajućim kutijama Ø60;
- Ugradnja na noseću prirubnicu utiskivanjem

- For covering the two assemblies with two modules in horizontal mounted box Ø60;
- Installation onto the mounting frame by pressing

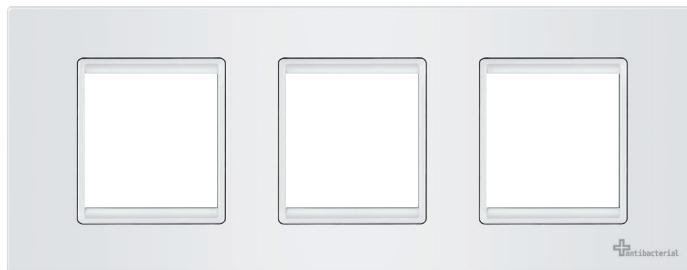



A70132.0

Maska 3x2M EXP,
ANTIBACTERIAL,
horizontalna, Bijela

Cover frame
3x2M, EXP,
ANTIBACTERIAL,
horizontal, white

- Za pokrivanje tri sklopa sa dva modula u horizontalnim nizajućim kutijama Ø60;
- Ugradnja na noseću prirubnicu utiskivanjem

- For covering the three assemblies with two modules in horizontal mounted box Ø60;
- Installation onto the mounting frame by pressing

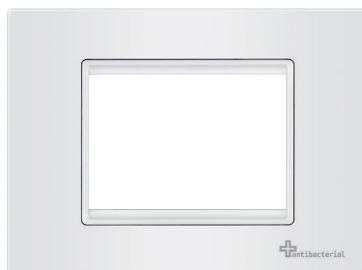


A70103.0

Maska
3M EXP,
ANTIBACTERIAL,
Bijela

Cover frame
3M EXP,
ANTIBACTERIAL,
white

- Za pokrivanje sklopa sa tri modula;
- Ugradnja na noseću prirubnicu utiskivanjem

- For covering the assembly with three modules;
- Installation onto the mounting frame by pressing

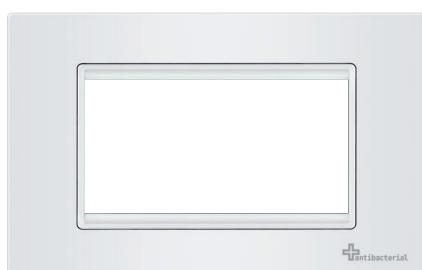


A70104.0

Maska
4M EXP,
ANTIBACTERIAL,
Bijela

Cover frame
4M EXP,
ANTIBACTERIAL,
white

- Za pokrivanje sklopa sa četiri modula;
- Ugradnja na noseću prirubnicu utiskivanjem

- For covering the assembly with four modules;
- Installation onto the mounting frame by pressing

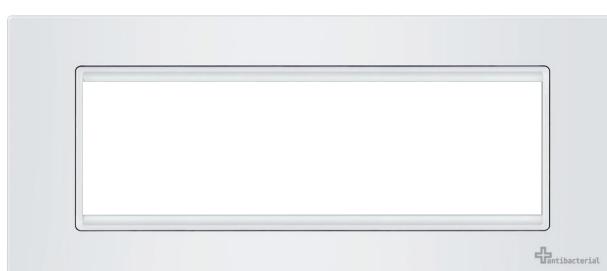

A70107.0

Maska
7M EXP,
ANTIBACTERIAL,
Bijela

Cover frame
7M EXP,
ANTIBACTERIAL,
white

- Za pokrivanje sklopa sa sedam modula;
- Ugradnja na noseću prirubnicu utiskivanjem

- For covering the assembly with seven modules;
- Installation onto the mounting frame by pressing



experience


SHEME SPAJANJA I TEHNIČKI CRTEŽI
WIRING DIAGRAMS & TECHNICAL DRAWINGS

e**x**perience



 **ALING-CONEL**

SHEME SPAJANJA WIRING DIAGRAMS




A72101

Prekidač Jednopolni
1 way switch


A72111

Tipkalo Jednopolno
Push-button switch

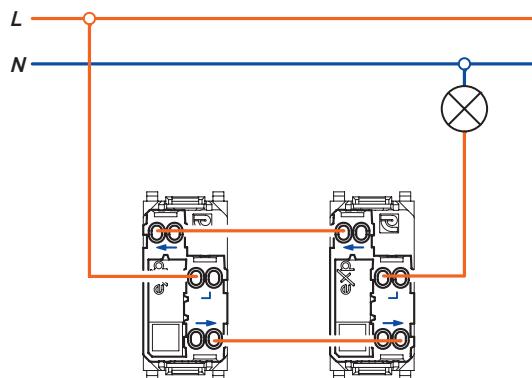


A72103

Prekidač izmjenični
2 way switch

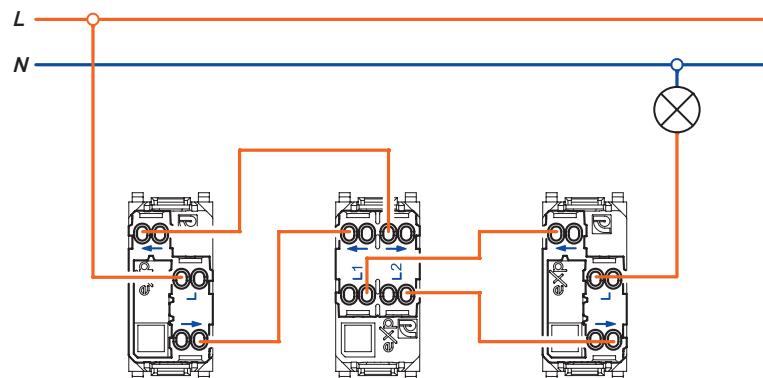


A72104

Prekidač križni u kombinaciji sa DVA prekidača AC
Intermediate switch in combination with two 2 way switches

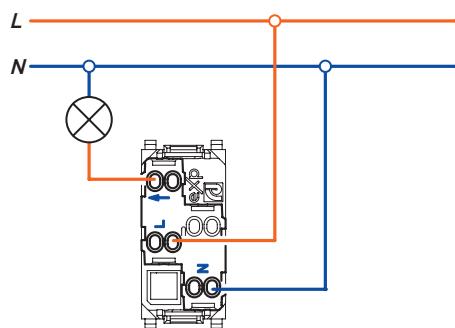


A72105

Prekidač Jednopolni sa priključkom za
nulti vodič (indikatorska)
1 way switch with connection for the
neutral conductor (with indicator)

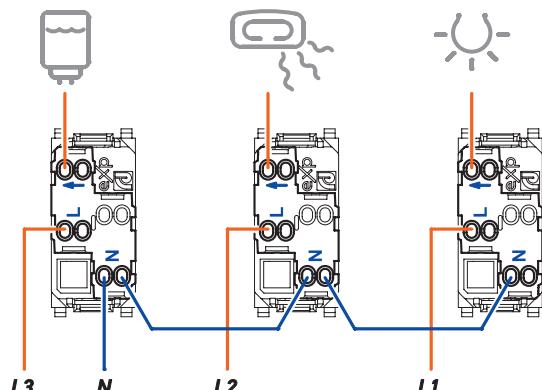


A72310

Univerzalni prekidač za kupaonu sa indikacijom
Universal bathroom switch set with indicator

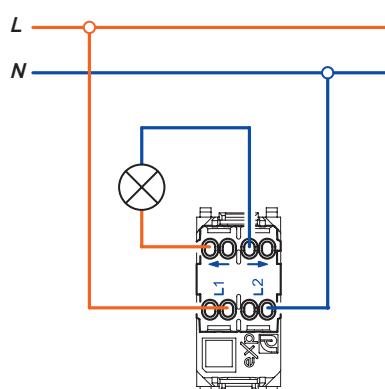


A72106

Prekidač dvopolni
2 pole switch

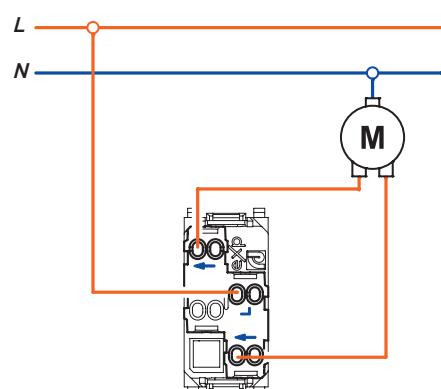

A72108

Prekidač za rolete
Shutters switch

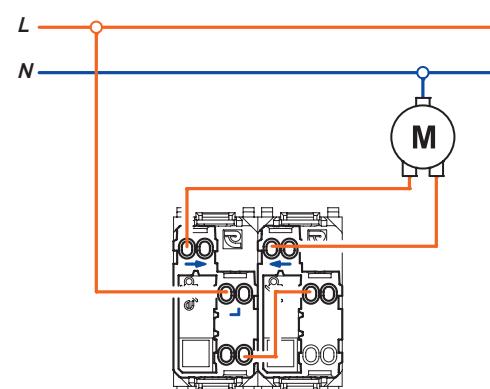


A72118

Prekidač za rolete
Push-button shutters switch

A72114


Prekidač za rolete
Push-button shutters switch

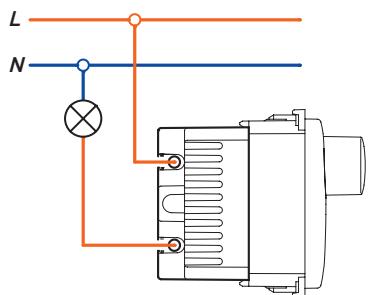

A72201

Elektronski regulator



Dimmer rotative



A72202

Elektronski regulator sa naizmjeničnom sklopom, povezivanje u naizmjeničnom režimu rada


Dimmer with alternative switch, wired in alternating mode

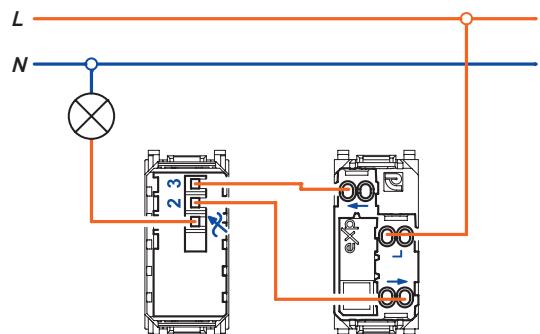

A72204


Elektronski regulator za induktivno opterećenje

Dimmer for inductive load

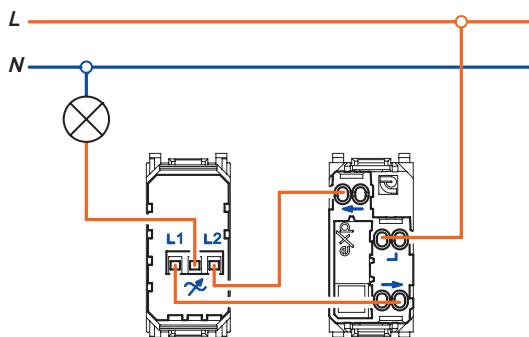

Elektronski regulator za induktivno opterećenje, povezivanje u naizmjeničnom režimu rada


Dimmer inductive load, wired in alternating mode



A72205


Elektronski regulator za LED

Dimmer for LED



Elektronski regulator za LED u režimu rada sa nultim vodičem


Dimmer for LED with neutral conductor mode

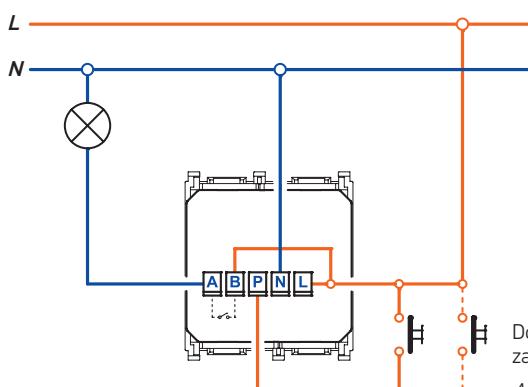

A72203

Infracrveni detektor pokreta

Infrared motion detector

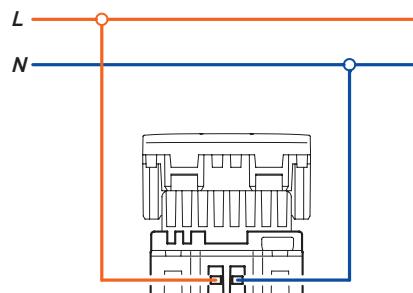









A74283








Utičnica USB punjač

Power supply unit USB


experience

TEHNIČKI CRTEŽI
TECHNICAL DRAWINGS

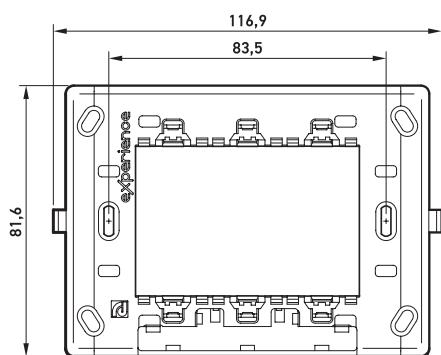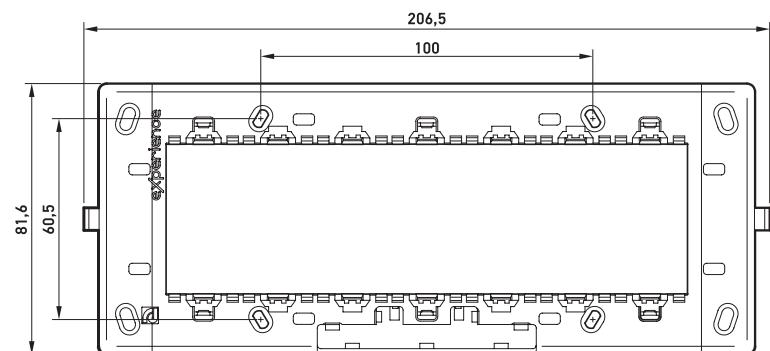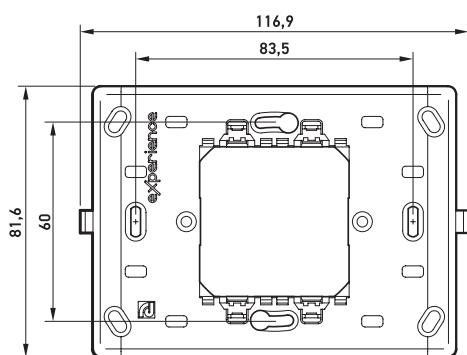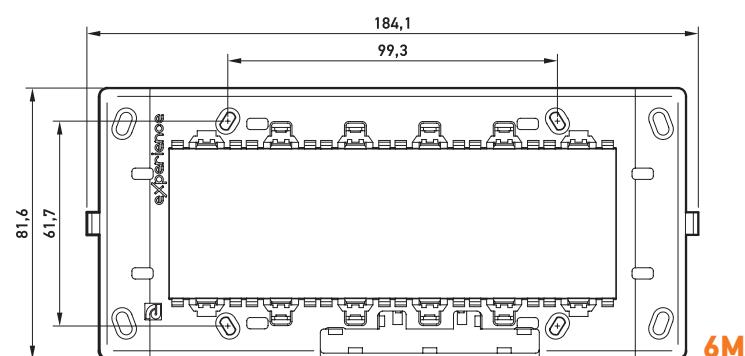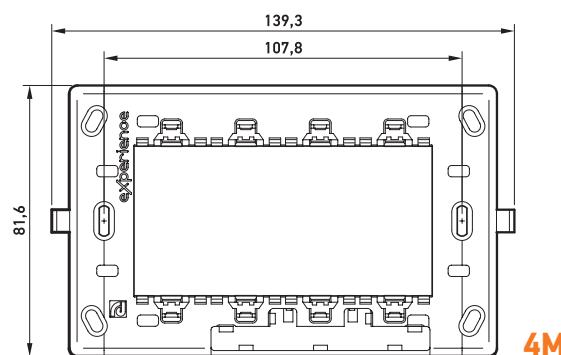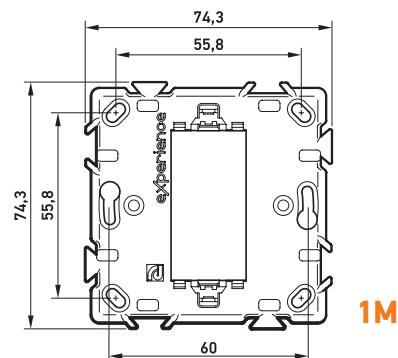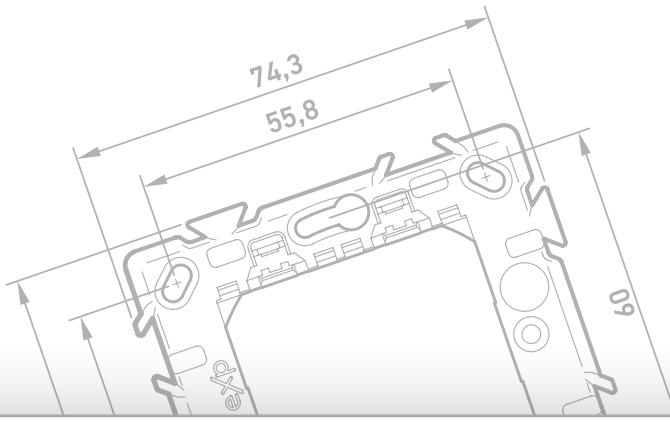


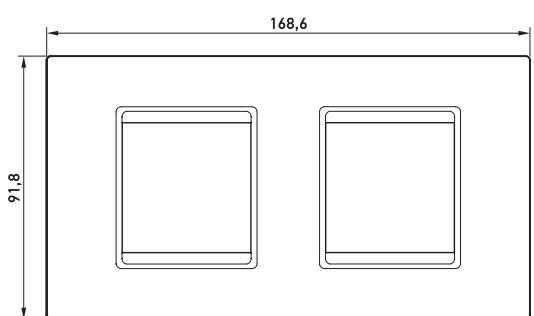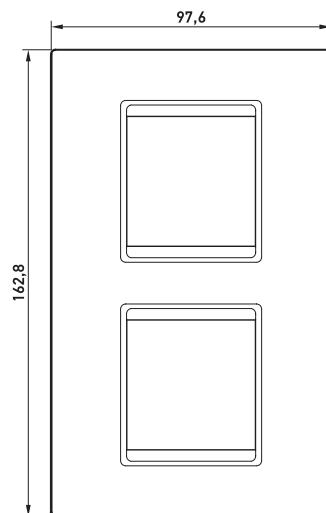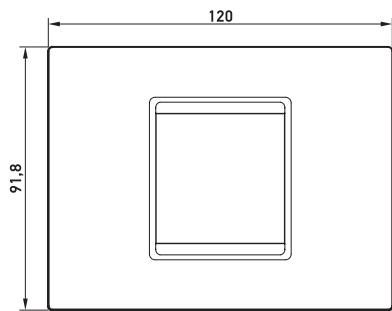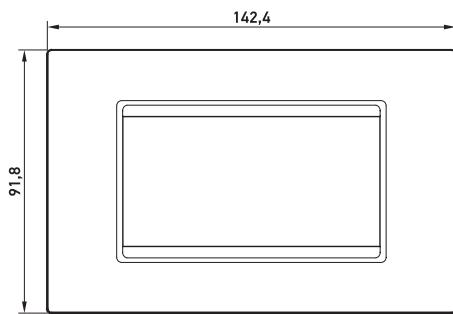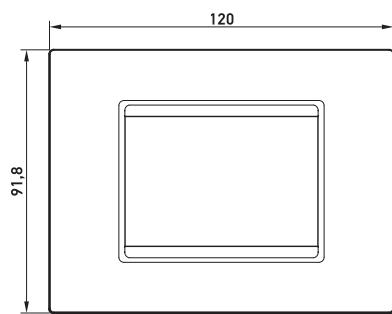


2x2M

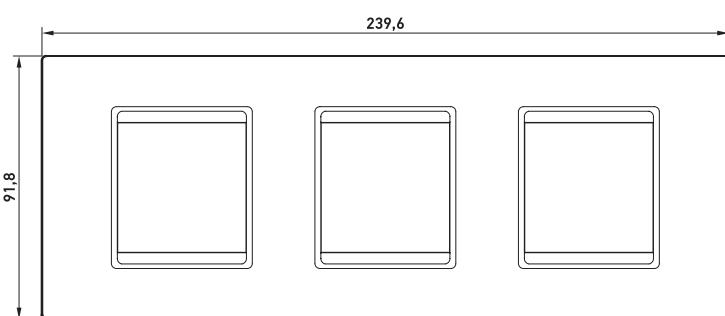


3x2M

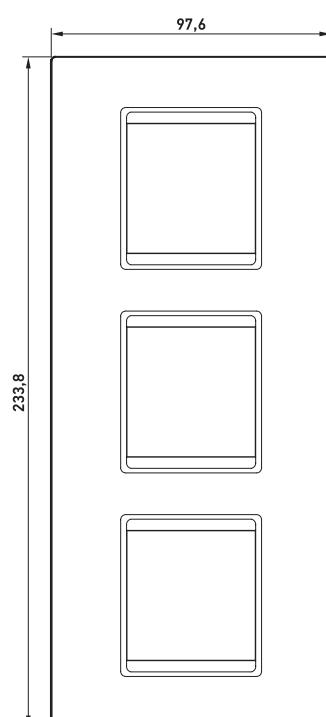

3x2M

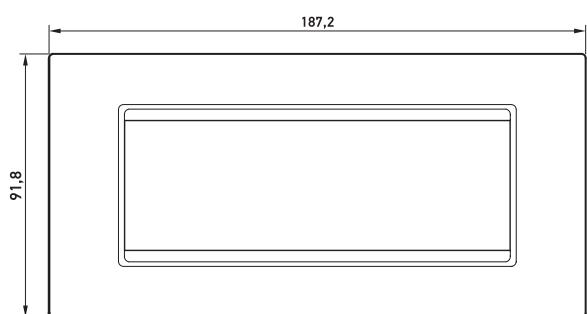

6M

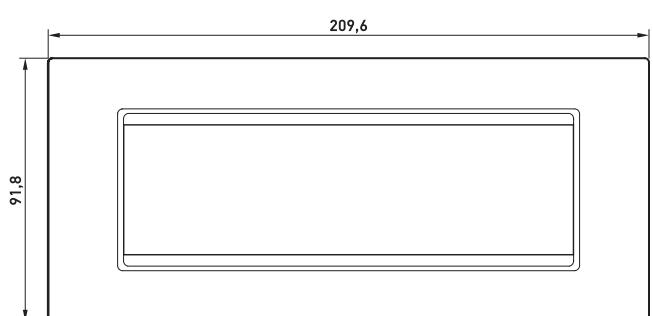

7M

SADRŽAJ KATALOGA

experience

THE CATALOG CONTENT

- 14 PREKIDAČI
SWITCHES
- 15 LED INDIKATORSKA SVJETLA
LED INDICATION LAMPS
- 16 TIPKALO
SWITCH BUTTONS
- 17 TIPKALO SA UGRAVIRANIM SIMBOLIMA
SWITCH BUTTONS ENGRAVED WITH THE SYMBOLS
- 18 PREKIDAČI ZA ROLETE
SWITCHES FOR SHUTTERS
- 19 ELEKTRONIKA
ELECTRONICS
- 20 PREKIDAČI ZA KUPATILO
BATHROOM SWITCHES
- 21 UNIVERZALNI INDIKATOR
UNIVERSAL BATHROOM SET
- 22 UTIČNICE
SOCKET OUTLETS
- 24 KOMUNIKACIJE
COMMUNICATIONS
- 28 DEKORATIVNE MASKE
DECORATIVE FRAMES
- 30 BASIC
BIJELA / WHITE
- 38 BASIC
CRNA / BLACK
- 46 BASIC
SREBRNA / SREBRNA
- 54 COLOR
VIVID
- 56 COLOR
METALIC
- 58 COLOR
SOFT TOUCH
- 60 EXCLUSIVE
WOOD
- 62 EXCLUSIVE
GLASS
- 64 EXCLUSIVE
METAL
- 66 UGRADNJA
INSTALLATION
- 68 PRIRUBNICE
MOUNTING FRAMES
- 70 PRIRUBNICE SA LED OSVJETLJENJEM
MOUNTING FRAMES WITH LED LIGHTNING
- 71 MONTAŽNI PRIBOR
INSTALLATION ACCESSORIES
- 72 MONTAŽNE KUTIJE ZA PUNI ZID
INSTALLATION BOXES FOR SOLID WALL
- 73 MONTAŽNE KUTIJE ZA ŠUPLJI ZID
INSTALLATION BOXES FOR HOLLOW WALL
- 74 ANTIBAKTERIJSKI PROGRAM
ANTIBACTERIAL PROGRAM
- 78 SHEME SPAJANJA
WIRING DIAGRAMS
- 80 TEHNIČKI CRTEŽI
TECHNICAL DRAWINGS

experience



 **ALING-CONEL**

**POSEBNE POGODNOSTI ZA NAŠE PARTNERE
IZLOŽBENE KARTONSKE POLICE**

**IZLOŽBENA KARTONSKA POLICA
KATALOŠKI BROJ KT02**



**POSEBNE POGODNOSTI ZA NAŠE PARTNERE
IZLOŽBENE KARTONSKE POLICE**

**IZLOŽBENA POLICA ZA
PREKIDAČE I MASKE
KATALOŠKI BROJ KT03**



**IZLOŽBENA POLICA ZA
PREKIDAČE I MASKE
KATALOŠKI BROJ KT04**



POSEBNE POGODNOSTI ZA NAŠE PARTNERE
IZLOŽBENI PANO S UZORCIMA

IZLOŽBENI PANO S UZORCIMA

KATALOŠKI BROJ KT05

94 x 70 cm



IZLOŽBENI PANO S UZORCIMA


KATALOŠKI BROJ KT06

60 X 50 cm

POSEBNE POGODNOSTI ZA NAŠE PARTNERE IZLOŽBENI SAMOSTOJEĆI PANOS UZORCIMA

IZLOŽBENI SAMOSTOJEĆI PANOS UZORCIMA



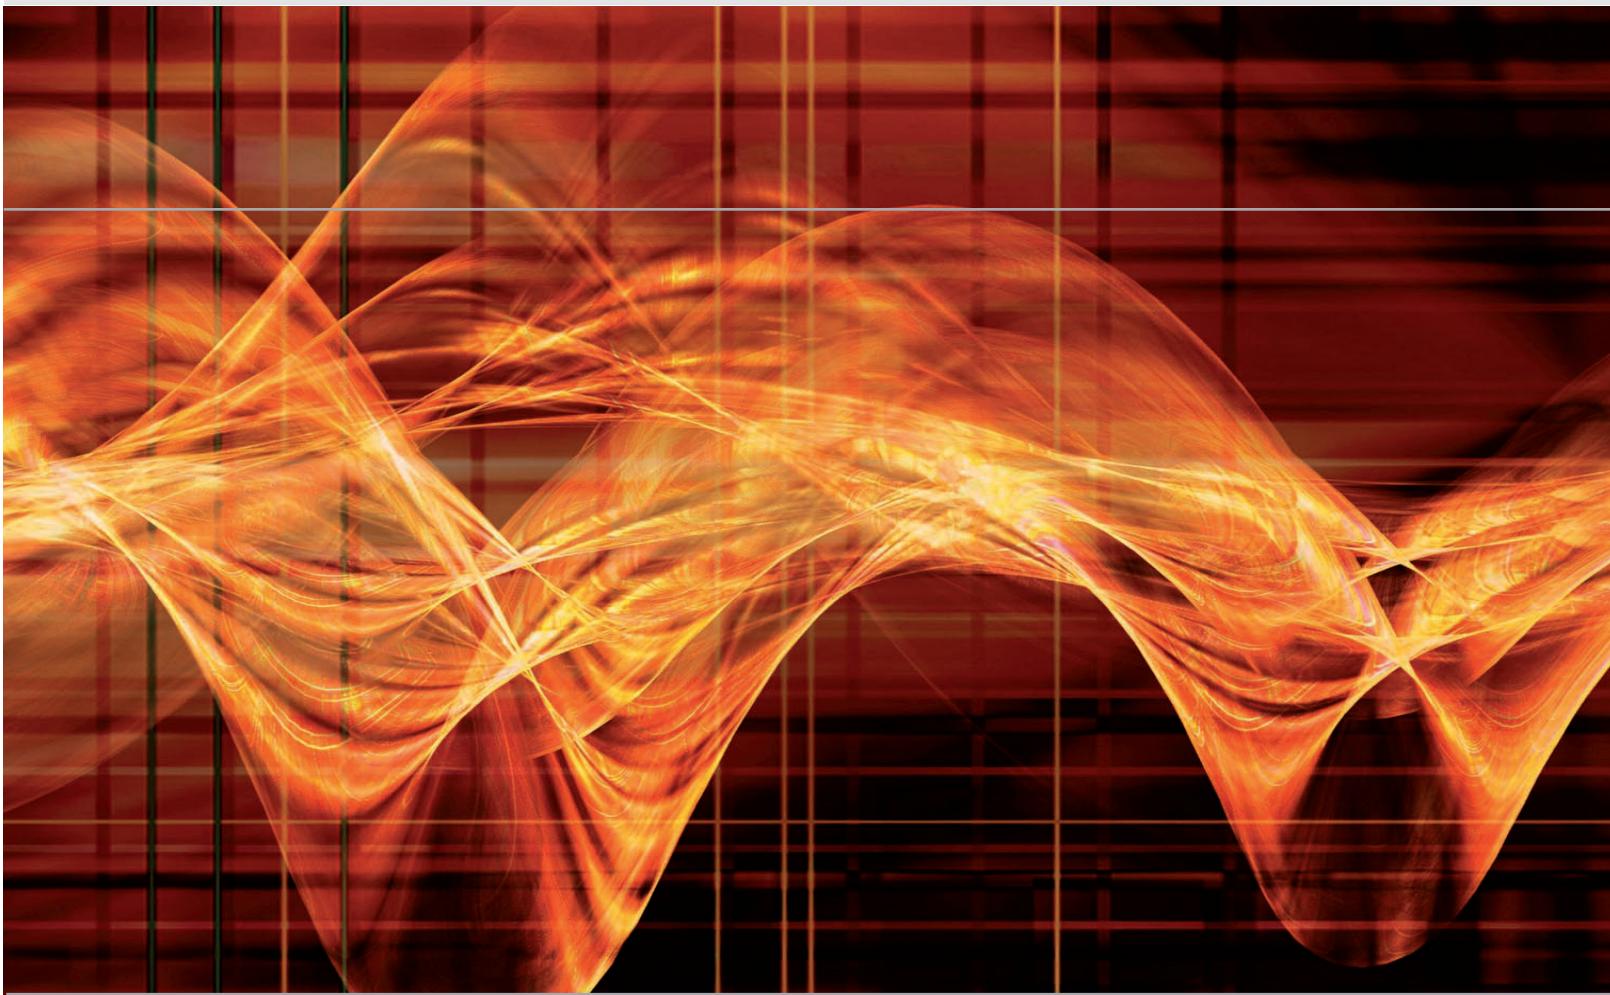

GENERALNI ZASTUPNIK:

KRAJNIK SALES ASSISTANTS d.o.o.

144. brigade Hrvatske vojske 2,
Sesvete 10360, Hrvatska

IZLOŽBENI PROSTOR I URED:

144. brigade Hrvatske vojske 2, Sesvete 10360
t: +385 91 1111 250
e: prodaja@v-tac.hr, prodajaksa@zg.ht.hr
f: +385 01 2385 474

DISTRIBUCIJSKI CENTAR POJATNO

Zagrebačka 3, Pojatno 10294
t: +385 99 214 5210
f: +385 01 2385 474

PRODAJNI SAVJETNICI PO

Zagreb, Zagrebačka županija, Karlovac, Sisak
t: +385 99 795 2356
e: zagreb@v-tac.hr

Istra, Primorje, Gorski Kotar, Lika
t: +385 91 6134 177
e: rijeka@v-tac.hr

Projektni partneri - elektroinstalateri, istočni dio Zagrebačke županije i grada Zagreba, Sisačko-moslavačka županija
t: +385 91 158 1656
e: projekti@v-tac.hr

Sjeverozapad Hrvatske
t: +385 91 6134 185
e: varazdin@v-tac.hr

Slavonija
t: +385 91 125 6565
e: slavonija@v-tac.hr

Projektni partneri - elektroinstalateri, zapadni dio Zagrebačke županije i grada Zagreba, Krapinsko-zagorska, Karlovačka županija
t: +385 91 603 9644
e: elektroprofi1@v-tac.hr

Dalmacija
t: +385 91 145 6565
e: dalmacija@v-tac.hr

Distribucija
t: +385 91 614 3771
e: distribucija@v-tac.hr

www.ELEKTROPROFI.hr

KSA ELEKTROPROFI

d ALING-CONEL